

## Hybrid motor starter - ELR H3-I-SC- 24DC/500AC-2 - 2900543

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



"2 in 1" hybrid motor starter for starting 3~ AC motors up to 550 V AC, with 24 V DC input, 2.4 A output current, and adjustable overload shutdown.

The figure shows the 9 A version

### Product Features

- 22.5 mm wide
- Low-wear switching
- Space saving
- Reduction in wiring
- Long service life
- 3-phase loop bridges
- Bimetal function can be set up to 9 A



### Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	260.0 GRM
Custom tariff number	85371099
Country of origin	Germany

### Technical data

#### Dimensions

Width	22.5 mm
Height	99 mm
Depth	114.5 mm

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C

# Hybrid motor starter - ELR H3-I-SC- 24DC/500AC-2 - 2900543

## Technical data

### Ambient conditions

Degree of protection	IP20
----------------------	------

### Input data

Input name	Device supply
Rated control supply voltage $U_S$	24 V DC
Voltage range with reference to $U_S$	0.8 ... 1.25
Rated control supply current $I_S$	40 mA
Rated actuating voltage $U_C$	24 V DC
Voltage range with reference to $U_C$	0.8 ... 1.25
Rated actuating current $I_C$	5 mA
Switching threshold "0" signal, voltage	9.6 V
Switching threshold "1" signal voltage	19.2 V
Protective circuit	Protection against polarity reversal Parallel polarity protection diode
	Surge protection
Typical response time	< 35 ms
Typical turn-off time	< 40 ms
Operating voltage display	Green LED
Status display	Yellow LED
Indication	Red LED
Input name	Control input right/left

### Output data

Output name	AC output
Nominal output voltage	500 V AC
Nominal output voltage range	42 V AC ... 550 V AC
Load current	max. 2.4 A (see derating curve)
Rated operating current at AC-51	2.4 A
Rated operating current at AC-53a	2.4 A
Leakage current	0 mA
Residual voltage	< 0.3 V
Surge current	100 A ( $t = 10$ ms)
Type of protection	Surge protection
Output name	Acknowledge output
Note	Confirmation 01: Floating PDT contact
Nominal output voltage	max. 250 V AC
Continuous load current	6 A

### Output data, signaling contact

Measuring via	Current transformer for line current on L1 and L3
---------------	---------------------------------------------------

# Hybrid motor starter - ELR H3-I-SC- 24DC/500AC-2 - 2900543

## Technical data

### Connection data

Connection method	Screw connection
Conductor cross section solid min.	0.14 mm <sup>2</sup>
Conductor cross section solid max.	2.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.14 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	14

### General

Test voltage input/output	4 kV <sub>rms</sub>
Mounting position	Vertical (horizontal DIN rail)
Assembly instructions	Can be aligned with spacing = 20 mm
Operating mode	100% operating factor
Designation	Standards/regulations
Standards/regulations	DIN EN 50178
	EN 60947
Designation	Power station requirements
Standards/regulations	DWR 1300 / ZXX01/DD/7080.8d
Designation	Air and creepage distances between the power circuits
Standards/regulations	DIN EN 50178
Rated surge voltage / insulation	6 kV/safe isolation
Rated insulation voltage	500 V
Pollution degree	2
Surge voltage category	III

## Classifications

### eCl@ss

eCl@ss 4.0	27371102
eCl@ss 4.1	27371102
eCl@ss 5.0	27371601
eCl@ss 5.1	27371601
eCl@ss 6.0	27371601
eCl@ss 7.0	27371601
eCl@ss 8.0	27371601

### ETIM

ETIM 2.0	EC000066
----------	----------

# Hybrid motor starter - ELR H3-I-SC- 24DC/500AC-2 - 2900543

## Classifications

### ETIM

ETIM 3.0	EC000066
ETIM 4.0	EC000066
ETIM 5.0	EC000066

### UNSPSC

UNSPSC 6.01	30211915
UNSPSC 7.0901	39121514
UNSPSC 11	39121514
UNSPSC 12.01	39121514
UNSPSC 13.2	39121514

## Approvals

### Approvals

---

#### Approvals

UL Listed / cUL Listed / IECCE CB Scheme / UL Listed / cUL Listed / IECCE CB Scheme / cULus Listed

---


#### Ex Approvals

---


#### Approvals submitted

---

### Approval details

UL Listed 

cUL Listed 


IECEE CB Scheme 

## Hybrid motor starter - ELR H3-I-SC- 24DC/500AC-2 - 2900543

### Approvals

UL Listed 

cUL Listed 

IECEE CB Scheme 

cULus Listed 

### Accessories

#### Accessories

#### Loop bridge

Jumper - BRIDGE- 2 - 2900746



3-phase loop bridge for 2 modules from the CONTACTRON family with screw connection and 22.5 mm housing width.

Jumper - BRIDGE- 3 - 2900747



3-phase loop bridge for 3 modules from the CONTACTRON family with screw connection and 22.5 mm housing width.

## Hybrid motor starter - ELR H3-I-SC- 24DC/500AC-2 - 2900543

### Accessories

Jumper - BRIDGE- 4 - 2900748



3-phase loop bridge for 4 modules from the CONTACTRON family with screw connection and 22.5 mm housing width.

---

Jumper - BRIDGE- 5 - 2900749



3-phase loop bridge for 5 modules from the CONTACTRON family with screw connection and 22.5 mm housing width.

---

Jumper - BRIDGE- 6 - 2900750



3-phase loop bridge for 6 modules from the CONTACTRON family with screw connection and 22.5 mm housing width.

---

Jumper - BRIDGE- 7 - 2900751



3-phase loop bridge for 7 modules from the CONTACTRON family with screw connection and 22.5 mm housing width.

---

Jumper - BRIDGE- 8 - 2900752



3-phase loop bridge for 8 modules from the CONTACTRON family with screw connection and 22.5 mm housing width.

---

## Hybrid motor starter - ELR H3-I-SC- 24DC/500AC-2 - 2900543

### Accessories

Jumper - BRIDGE- 9 - 2900753



3-phase loop bridge for 9 modules from the CONTACTRON family with screw connection and 22.5 mm housing width.

---

Jumper - BRIDGE-10 - 2900754



3-phase loop bridge for 10 modules from the CONTACTRON family with screw connection and 22.5 mm housing width.

---

Jumper - BRIDGE- 2-3M - 2901543



3-phase loop bridge for 2 modules from the CONTACTRON family with screw connection and 22.5 mm housing width, 3 m long connecting cable, and included ferrules.

---

Jumper - BRIDGE- 3-3M - 2901656



3-phase loop bridge for 3 modules from the CONTACTRON family with screw connection and 22.5 mm housing width, 3 m long connecting cable, and included ferrules.

---

Jumper - BRIDGE- 4-3M - 2901659



3-phase loop bridge for 4 modules from the CONTACTRON family with screw connection and 22.5 mm housing width, 3 m long connecting cable, and included ferrules.

---

## Hybrid motor starter - ELR H3-I-SC- 24DC/500AC-2 - 2900543

### Accessories

Jumper - BRIDGE- 5-3M - 2901545



3-phase loop bridge for 5 modules in the CONTACTRON family with 22.5 mm housing width, 3 m long connecting cable, and provided ferrules

---

Jumper - BRIDGE- 6-3M - 2901697



3-phase loop bridge for 6 modules from the CONTACTRON family with screw connection and 22.5 mm housing width, 3 m long connecting cable, and included ferrules.

---

Jumper - BRIDGE- 7-3M - 2901698



3-phase loop bridge for 7 modules from the CONTACTRON family with screw connection and 22.5 mm housing width, 3 m long connecting cable, and included ferrules.

---

Jumper - BRIDGE- 8-3M - 2901700



3-phase loop bridge for 8 modules from the CONTACTRON family with screw connection and 22.5 mm housing width, 3 m long connecting cable, and included ferrules.

---

Jumper - BRIDGE- 9-3M - 2901701



3-phase loop bridge for 9 modules from the CONTACTRON family with screw connection and 22.5 mm housing width, 3 m long connecting cable, and included ferrules.

---



## Hybrid motor starter - ELR H3-I-SC- 24DC/500AC-2 - 2900543

### Accessories

Jumper - BRIDGE-10-3M - 2901702



3-phase loop bridge for 10 modules from the CONTACTRON family with screw connection and 22.5 mm housing width, 3 m long connecting cable, and included ferrules.

---

Jumper - BRIDGE- 2-1M - 2901542



3-phase loop bridge for 2 modules from the CONTACTRON family with screw connection and 22.5 mm housing width, 1 m long connecting cable, without ferrules.

---

Jumper - BRIDGE- 3-1M - 2901655



3-phase loop bridge for 3 modules from the CONTACTRON family with screw connection and 22.5 mm housing width, 1 m long connecting cable, without ferrules.

---

Jumper - BRIDGE- 4-1M - 2901658



3-phase loop bridge for 4 modules from the CONTACTRON family with screw connection and 22.5 mm housing width, 1 m long connecting cable, without ferrules.

---

Jumper - BRIDGE- 5-1M - 2901544



3-phase loop bridge for 5 modules from the CONTACTRON family with screw connection and 22.5 mm housing width, 1 m long connecting cable, without ferrules.

---

# Hybrid motor starter - ELR H3-I-SC- 24DC/500AC-2 - 2900543



## Accessories

Jumper - BRIDGE- 6-1M - 2901649



3-phase loop bridge for 6 modules in the CONTACTRON family with 1 m long connecting cable without ferrules, 22.5 mm housing width.


## Drawings

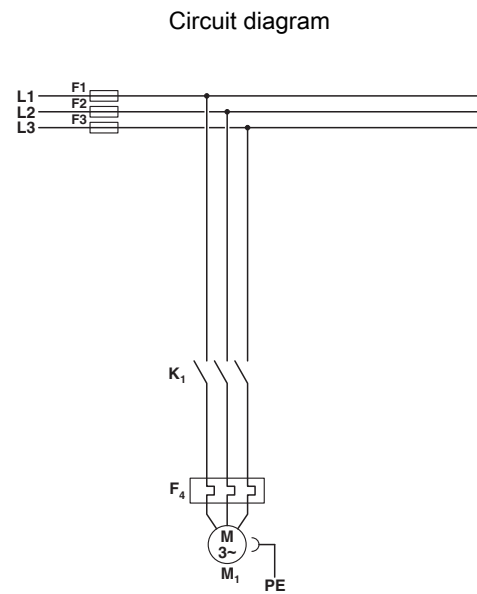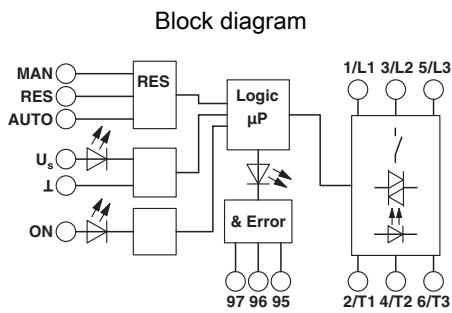

Conventional structure  
Main current path reversing contactor  
K1 = Right contactor  
F4 = Motor protection relay


## Hybrid motor starter - ELR H3-I-SC- 24DC/500AC-2 - 2900543

Circuit diagram

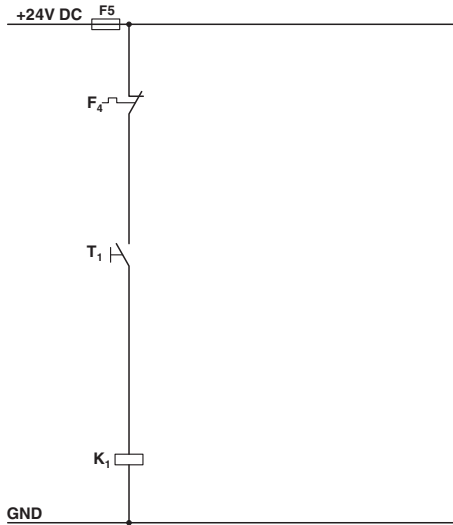

Conventional structure  
Control current path contactor  
K1 = Right contactor  
T1 = Right  
F4 = Motor protection relay

Circuit diagram

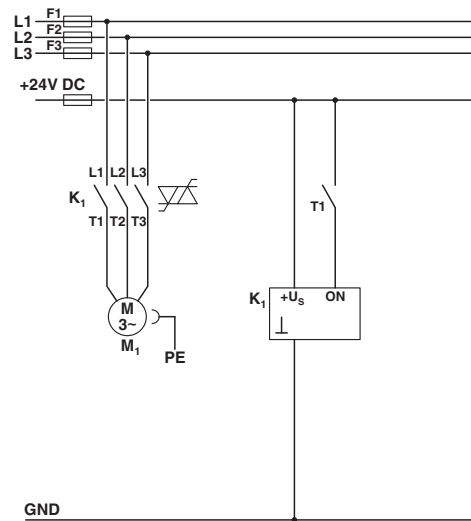

Structure with CONTACTRON  
Main and control current path for '2 in 1' hybrid motor starter  
K1 = '2 in 1' hybrid motor starter  
T1 = Right