

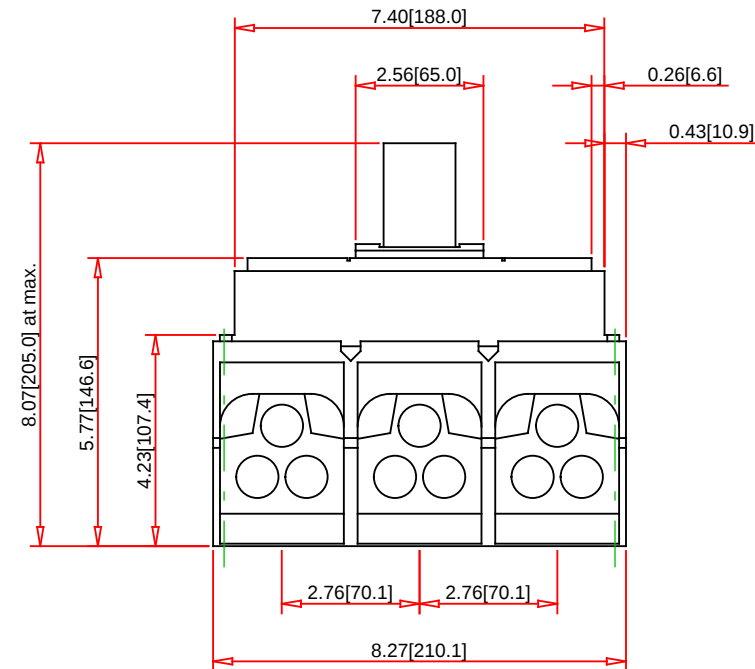


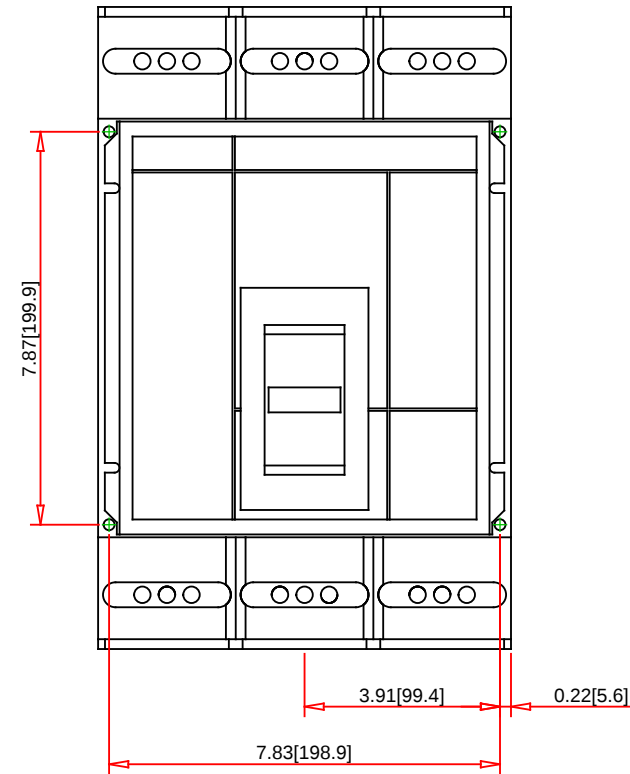

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
PGL36080U33A

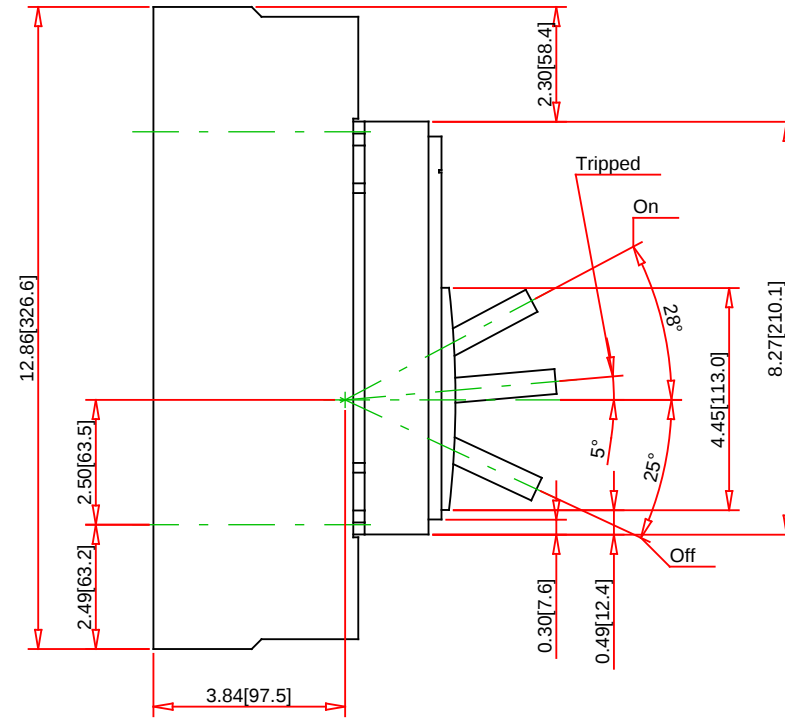

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:		Specification:	
General Application:	Provides overload and short circuit protection	Description:	PowerPact P-frame Electronic Trip Circuit Breaker
For Use With:	Panelboards and Switchboards	Number of Poles:	3-Pole
Approvals:	UL Listed - CSA Certified - IEC Rated	Sensor Rating:	800A
Mounting Type:	Unit Mount	Voltage Rating:	600VAC
Terminal Type:	Lugs (ON and OFF ends)	Interrupting Rating:	65kA at 240VAC - 35kA at 480VAC - 18kA at 600VAC
Wire Size:	#3/0-500 AWG/kcmil(Al/Cu)	Circuit Breaker Rating:	80% Rated
Weight:	32 Pounds	Electronic Trip Unit:	Micrologic Standard Trip Unit (5.0)
Depth:	8.07 Inches	Trip Function:	LSI
Height:	12.86 Inches	Installed Rating Plug:	Type A
Width:	8.27 Inches	Rating Plug Range:	0.4A to 1A