
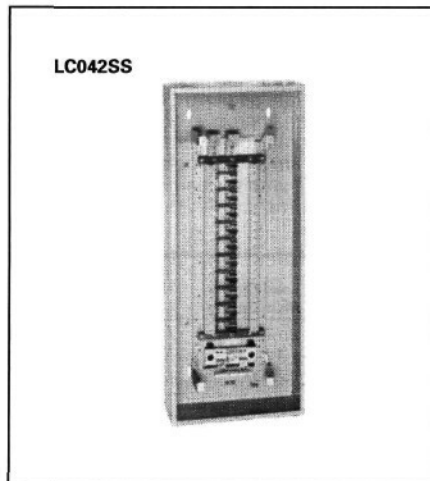


Rock Solid Load Centers

Main Lug Only 1-Phase 65,000 AIC

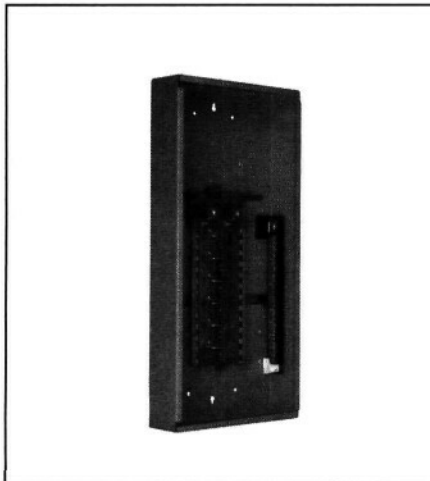

Load centers on this page through 225 amp feature a new split neutral with one bonded and one insulated bar. For service entrance applications, install bonding strap, and use both bars for neutral and ground conductors. For non service entrance applications, do not install bonding strap and use insulated bar for neutral conductors and bonded bar for ground conductors.

Main Lug Panels 3-Wire 120/240V AC or 208Y/120V AC, Insulated & Bonded Split Neutrals^③ (See Interrupting Capacity Statement on preceding page)

INDOOR ENCLOSURE—TYPE 1									OUTDOOR ENCLOSURE—TYPE 3R ^①					
Amps	1" Spaces	Max. # Single Poles	Cat #	List Each	Std. Pkg.	Dimensions—Inches ^②			Cat #	List Each	Std. Pkg.	Dimensions—Inches ^②		
						Length	Width	Depth				Length	Width	Depth
12-42 CIRCUIT, 125-400 AMPERES									12-42 CIRCUIT, 125-400 AMPERES					
125	12	24	LC1224L1125	167.00	1	21	14¼	4	LW1224L1125	267.00	1	20	14¼	4½
125	16	32	LC1632L1125	218.00	1	21	14¼	4	LW1632L1125	320.00	1	29	14¼	4½
125	20	40	LC2040L1125	277.00	1	24	14¼	4	LW2040L1125	373.00	1	29	14¼	4½
125	30	40	LC3040L1125	350.00	1	30	14¼	4	—	—	—	—	—	—
150	16	32	LC1632L1150	271.00	1	24	14¼	4	—	—	—	—	—	—
150	24	40	LC2440L1150	330.00	1	30	14¼	4	—	—	—	—	—	—
200	12	24	—	—	—	—	—	—	LW1224L1200	363.00	1	29	14¼	4½
200	20	40	LC2040L1200	387.00	1	30	14¼	4	LW2040L1200	482.00	1	29	14¼	4½
200	24	40	LC2440L1200	393.00	1	30	14¼	4	—	—	—	—	—	—
200	30	40	LC3040L1200	420.00	1	36	14¼	4	LW3040L1200	545.00	1	38	14¼	4½
200	40	40	LC4040L1200	575.00	1	39	14¼	4	—	—	—	—	—	—
COPPER BUS														
125	20	40	LC2040L1125CU	294.00	1	24	14¼	4	—	—	—	—	—	—
200	20	40	LC2040L1200CU	410.00	1	30	14¼	4	—	—	—	—	—	—
200	30	40	LC3040L1200CU	446.00	1	36	14¼	4	—	—	—	—	—	—
200	40	40	LC4040L1200CU	610.00	1	39	14¼	4	—	—	—	—	—	—
225	42	42	LC4242L1225CU	647.00	1	42	14¼	4	—	—	—	—	—	—
400	42	42	LC042SS ^④	1246.00	1	47	20	6	LW042SR	1617.00	1	47	20½	6½

① Hub provision only. Closure plate included. Panels through 225A require HS type hub; panels over 225A require HV type hub. See accessories pages. for hub selection.

② If #2/0 feeder is used, order Cat #LX081M neutral lug kit.

③ 300 & 400 Amp load centers have insulated groundable center-mounted neutrals.

④ For flush installation, order accessory Cat #LX077SF separately; see accessories pages.

⑤ Dimensions shown are representative of outside box length, width & depth (± 1/8") and do not include allowance for mounting bumps, endwalls, hubs or hardware protrusions. Allow approximately 1 1/2" additional in length and width dimensions for surface or combination overhang. Consult factory for specific details if required.