


Eaton BPMA230UL

Catalog Number: BPMA230UL

Eaton Bussmann series replacement module, Technology type MOV, 50/60 Hz freq rating, 200 kA short ckt rating, 35 mm DIN rail mount, GL/GG class, 25 Ns response time, Thermoplastic, -40 to 80 °C operating temperature, 230V operating voltage

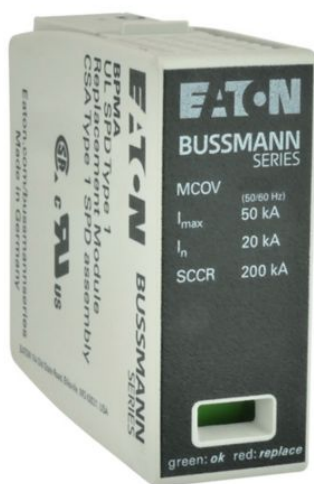

General specifications

Product Name	Catalog Number
Eaton Bussmann series replacement module	BPMA230UL
	UPC
	051712708975
Product Length/Depth	Product Height
0.71 in	1.77 in
Product Width	Product Weight
1.97 in	0.1 lb
Warranty	Compliances
Not Applicable	RoHS Compliant
	Contact factory
Certifications	
UL Listed	

defaultTaxonomyAttributeLabel

Type

BPM series

Application

Surge Protection

Frequency rating

50/60 Hz

Nominal Discharge Current

20 kA

Operating voltage

385/770

Enclosure

Thermoplastic, UL94V9

Surge current

40 kA

Indicator type

Remote contact

Short-circuit rating

200 kA

Mounting Method

35 mm DIN rail

Resources

Catalogs

[Bussmann series complete full line catalog no. 1007](#)

[BPMA230UL~Replacement Module 230V](#)

Specifications and datasheets

[Eaton Specification Sheet - BPMA230UL](#)



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



[Eaton.com/socialmedia](https://www.eaton.com/socialmedia)