


CAST SECONDARY BONDING LUG, ALUMINUM, BARE

CATALOG NUMBER

LPA555



CERTIFICATIONS



FEATURES

Cast terminal bonding lug with two bolt tension on secondary conductors

Use to connect metal objects such as ladders and drains to lightning protection system

PRODUCT ATTRIBUTES

Conductor Size, UL: Secondary

Material: Aluminum

Finish: Bare

Hole Size (HS): 5/16"

Depth (D): 3/4"

Height (H): 0.78"


Width (W): 2 3/8"

Unit Weight: 0.09 lb

ADDITIONAL PRODUCT DETAILS

For use with secondary bonding cables and wires up to 0.3" (7.62 mm) in diameter.

DIAGRAMS

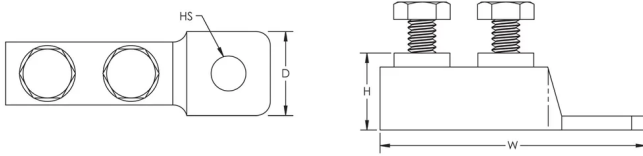

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

Europe

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europe

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF**
TRACER