



PL-C/T

12PL-C/T/COR/32V-835/IF14/P/4P/DIM 10/1

Philips PLED 4-pin & 2-pin lamps are an affordable LED solution to replace compact fluorescent lamps. The product provides a natural lighting effect for use in many lighting applications, and provides instant energy savings, making them an environmentally-friendly solution. Available as replacements for 13W, 26W and 32W compact fluorescent lamps.

Product data


General Information		Power (Rated) (Nom)	
Base	GX24q	Power (Rated) (Nom)	12 W
EU RoHS compliant	Yes	Lamp Current (Max)	500 mA
Main Application	Industrial	Lamp Current (Min)	150 mA
Nominal Lifetime (Nom)	50000 h	Wattage Equivalent	32 W
Switching Cycle	50000X	Starting Time (Nom)	0.5 s
Technical Type	12-32W	Warm Up Time to 60% Light (Nom)	0.5 s
		UL Type	Type A - works on ballast
		Power Factor (Nom)	0.9
		Voltage (Nom)	25-55 V
Light Technical		Temperature	
Color Code	835 [CCT of 3500K]	T-Ambient (Max)	45 °C
Beam Angle (Nom)	120 °	T-Ambient (Min)	-20 °C
Initial lumen (Nom)	1450 lm	T-Storage (Max)	65 °C
Luminous Flux (Rated) (Nom)	1450 lm	T-Storage (Min)	-40 °C
Color Designation	White (WH)	T-Case Maximum (Nom)	25 °C
Correlated Color Temperature (Nom)	3500 K		
Luminous Efficacy (rated) (Nom)	120.00 lm/W	Controls and Dimming	
Color Consistency	<6	Dimmable	Yes
Color Rendering Index (Nom)	82		
LLMF At End Of Nominal Lifetime (Nom)	70 %	Mechanical and Housing	
		Bulb Finish	Frosted
Operating and Electrical			
Input Frequency	20000-100000 Hz		

PL-C/T

Bulb Material	Plastic
Product Length	4 in
Bulb Shape	Tube, single-ended
Approval and Application	
Energy Saving Product	Yes
Approbation Marks	RoHS compliance UL certificate KEMA Keur certificate DLC compliance
Energy Consumption kWh/1000 h	- kWh
Energy Certifications	DLC Standard

Product Data	
Order product name	12PL-C/T/COR/32V-835/IF14/P/4P/DIM 10/1
EAN/UPC - Product	046677476120
Order code	476127
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001820304
Net Weight (Piece)	0.091 kg
Model Number	9290018203


Dimensional drawing

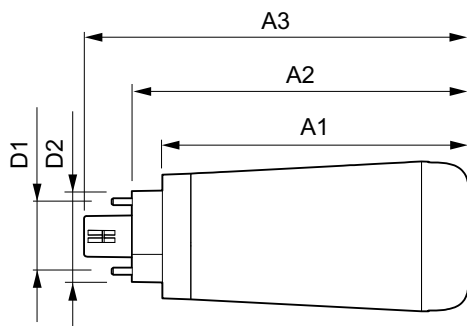


PLED 120V 12-32W 1450lm 3500K G24/Gx24

Product	D1	D2	A1	A2	A3
12PL-C/T/COR/32V-835/IF14/P/4P/DIM 10/1	24.3 mm	29 mm	99.9 mm	109.9 mm	125.5 mm

Photometric data

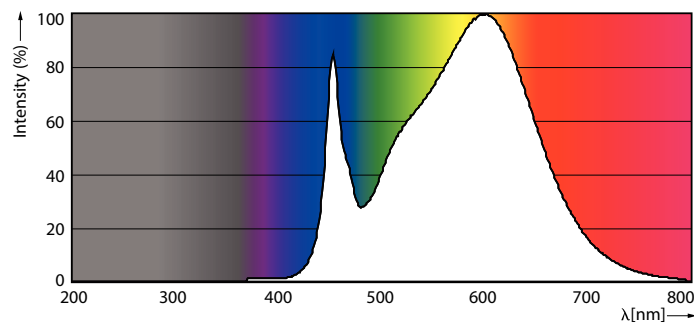


LEDtube 8-15W G13 835 160D IF 6U EasySmart

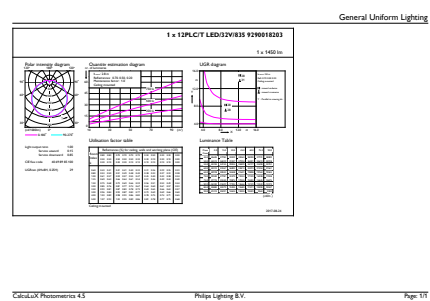


LEDtube PLC/T 12W G24Q 835 32V DIM

Photometric data




LEDtube PLC/T 12W G24Q 827 32V DIM


Lifetime

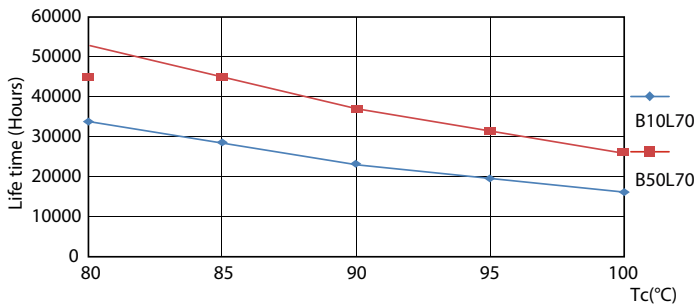


LEDtube PLC/T 12W G24Q 827-840 32H-32V DIM

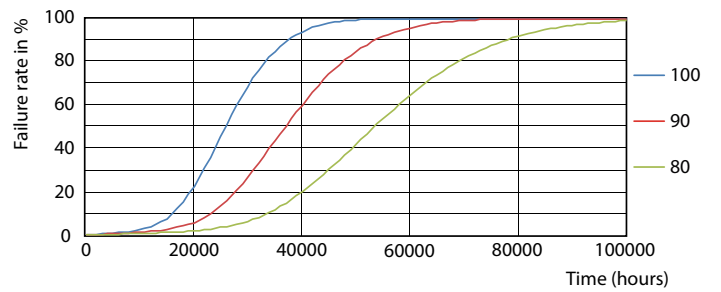

LEDtube PLC/T 12W G24Q 827-840 32H-32V DIM

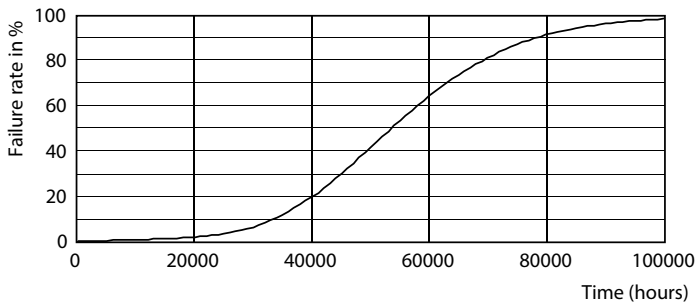


LEDtube PLC/T 12W G24Q 827-840 32H-32V DIM

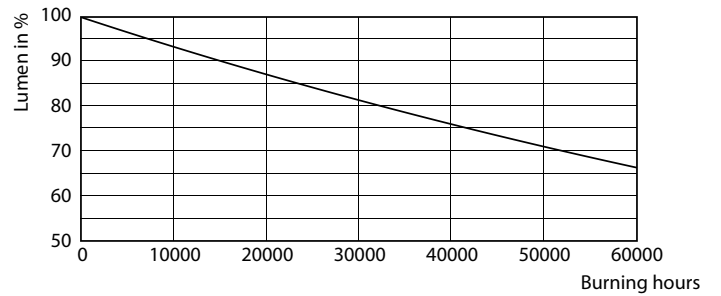

LEDtube PLC/T 12W G24Q 827-840 32H-32V DIM

PL-C/T

Lifetime

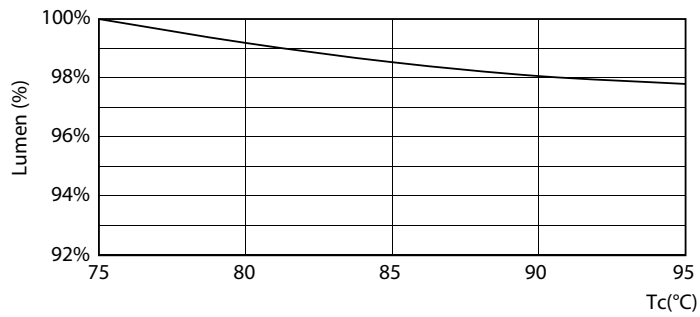

LEDtube PLC/T 12W G24Q 827-840 32V DIM

