

RXG25BD

Harmony, Interface plug-in relay, 5 A, 2 CO, clear cover, 24 V DC



Main

| | |
|-------------------------------|----------------------------------|
| Range of Product | Harmony Electromechanical Relays |
| Series name | Interface relay |
| Product or Component Type | Plug-in relay |
| Device short name | RXG |
| Contacts type and composition | 2 C/O |

Complementary

| | |
|--|---|
| Contacts material | Silver alloy (AgSnO ₂ In ₂ O ₃) |
| Maximum contact resistance | 100 mOhm |
| [I _{th}] conventional enclosed thermal current | 5 A -40...131 °F (-40...55 °C) |
| [I _e] rated operational current | 5 A 30 V DC) UL 5 A 30 V DC) IEC 5 A 250 V AC) IEC 5 A 250 V AC) UL |
| Maximum switching voltage | 250 V AC 30 V DC |
| Load current | 5 A 250 V AC |
| Maximum switching capacity | 1250 VA |
| Minimum switching capacity | 50 mW at 10 mA, 5 V DC |
| Operating rate | <= 1800 cycles/hour under load <= 18000 cycles/hour no-load |
| Utilisation coefficient | 20 % |
| Mechanical durability | 10000000 cycles |
| Electrical durability | 100000 Cycles NO resistive at 55 °C 100000 cycles NC resistive at 55 °C |
| [U _i] rated insulation voltage | 250 V IEC 300 V CSA 300 V UL |
| [U _{imp}] rated impulse withstand voltage | 6 kV 1.2/50 μs |
| Dielectric strength | 1000 V AC between contacts with micro disconnection 5000 V AC between coil and contact with reinforced insulation 3000 V AC between poles with basic insulation |
| Coil resistance | 1100 Ohm +/- 10 % |
| Insulation resistance | 1000 MOhm at 500 V DC |
| Test levels | Level A |
| Mounting position | Any position |
| Drop-out voltage threshold | >= 0.1 U _c DC |
| Coil insulation class | Class F |
| Operate time | 20 ms |
| Release time | 20 ms |
| [U _c] control circuit voltage | 24 V DC |
| Safety reliability data | B10d = 100000 |
| Colour of cover | Transparent |
| Torque Value | 7.08 lbf.in (0.8 N.m) |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

| | |
|---------------------|------------------------|
| Net Weight | 0.04 lb(US) (0.018 kg) |
| Device presentation | Complete product |

Environment

| | |
|---------------------------------------|--|
| Vibration resistance | 3 gn +/- 0.75 mm 10...150 Hz)in operation 5 gn +/- 0.75 mm 10...150 Hz)not in operation |
| IP Degree of Protection | IP40 |
| Shock resistance | 20 gn in operation 100 gn not in operation |
| Protection category | RT I |
| Standards | CSA C22.2 No 14 IEC 61810-1 UL 508 |
| Product Certifications | CSA CE EAC UL |
| Pollution degree | 2 |
| Overvoltage category | III |
| Ambient Air Temperature for Storage | -40...185 °F (-40...85 °C) |
| Ambient Air Temperature for Operation | -40...158 °F (-40...70 °C) |
| Relative humidity | 10...85 % |

Ordering and shipping details

| | |
|-----------------------|-----------------------------|
| Category | 21127-ZELIO ICE CUBE RELAYS |
| Discount Schedule | CP2 |
| GTIN | 3606480689390 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 7.90 oz (224.0 g) |
| Returnability | No |
| Country of origin | CN |


Packing Units

| | |
|------------------------|-------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 1.36 in (3.45 cm) |
| Package 1 width | 3.64 in (9.25 cm) |
| Package 1 Length | 3.39 in (8.6 cm) |


Offer Sustainability

| | |
|----------------------------|--|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |

Dimensions

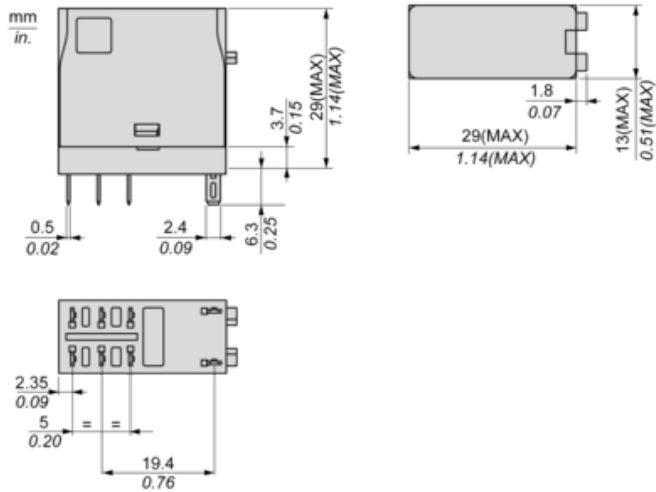


Wiring Diagram

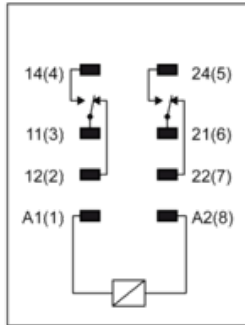

Performance Curves

Maximum Switching Capacity

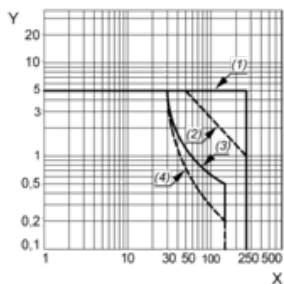

X : Switching voltage (V)

Y : Switching current (A)

(1) AC Resistive Load


(2) AC Inductive Load $\cos(\phi)=0.4$

(3) DC Resistive Load

(4) DC Inductive Load (L/R=7ms)

Life Expectancy

Resistive Load

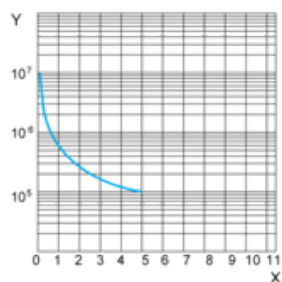


X : Contact Current (A)

Y : Operating Cycle Number

Life Expectancy

Inductive Load

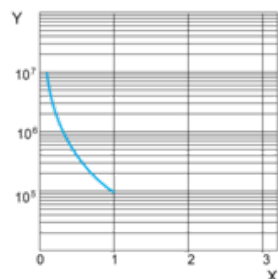


X : Contact Current (A)

Y : Operating Cycle Number

NOTE: These are typical curves, actual durability depends on load, environment, duty cycle, etc.

Coil Operating Range

DC Coil Operating Range VS Ambient Temperature

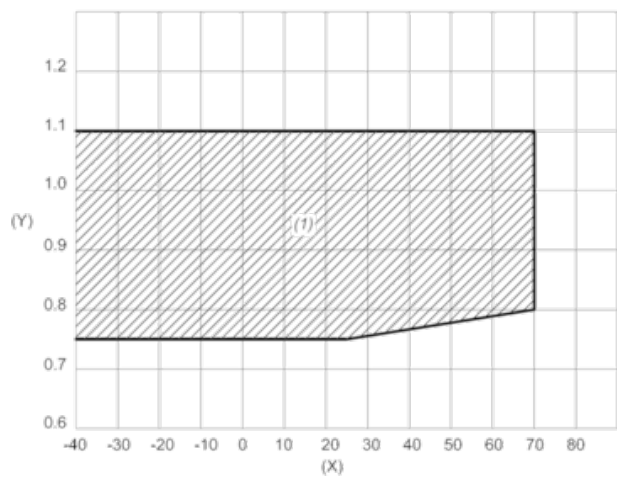

X : Ambient temperature (°C)

Y : Coil voltage (U/Uc)

(1) Permitted operating range area