

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	11.5/13/15W
120V	.098/.110/.127A	Color Temp	3000/3500/4000/5000/6500K
208V	.058/.066/.076A	Color Accuracy	82 CRI
240V	.051/.058/.066A	L70 Lifespan	50,000 Hours
277V	.045/.051/.059A	Lumens	1,800/2,000/2,200 lm
Input Watts	11.5/13/15W	Efficacy	156/154/147 lm/W

## Technical Specifications

### Performance

#### Product Type:

Linear Tube

#### Description:

Hybrid Type A/B tubes allow installation on the ballast or direct wiring to line voltage. Now available with adjustable 5CCT switch.

#### Wattage Equivalency:

32W Fluorescent

#### Input Wattage:

11.5/13/15W

#### Lumens:

11.5W  
3000K @ 1,700lm; 3500K @ 1,700lm; 4000K @ 1,800lm; 5000K @ 1,800lm; 6500K @ 1,800lm

13W  
3000K @ 1,900lm; 3500K @ 1,900lm; 4000K @ 2,000lm; 5000K @ 2,000lm; 6500K @ 2,000lm

15W  
3000K @ 2,100lm; 3500K @ 2,100lm; 4000K @ 2,200lm; 5000K @ 2,200lm; 6500K @ 2,200lm

#### Efficacy:

11.5W  
3000K @ 148lm/W; 3500K @ 148lm/W; 4000K @ 157lm/W; 5000K @ 157lm/W; 6500K @ 157lm/W

13W  
3000K @ 146lm/W; 3500K @ 146lm/W; 4000K @ 154lm/W; 5000K @ 154lm/W; 6500K @ 154lm/W

15W  
3000K @ 140lm/W; 3500K @ 140lm/W; 4000K @ 147lm/W; 5000K @ 147lm/W; 6500K @ 147lm/W

#### L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

### Electrical

#### THD:

<25%

#### Power Factor:

>0.9

#### Dimmable:

Type B: TRIAC Dimming @ 120V only  
Type A: 0-10V dimming with compatible dimmable fluorescent ballast and 0-10V Dimmer

#### Input Voltage:

Type A: Ballast dependent  
Type B: 120-277V

#### Operating Frequency:

50/60Hz

#### Input Current @ 120V (mA):

98/110/127mA

#### Input Current @ 208V (mA):

58/66/76mA

#### Input Current @ 240V (mA):

51/58/66mA

#### Input Current @ 277V (mA):

45/51/59mA

#### Operating Temperature:

-4°F to 113°F (-20°C to 45°C)

#### Flicker:

<40%

### LED Characteristics

#### Beam Angle:

160°

#### Color Temperature:

Field adjustable via dip switch  
3000/3500/4000/5000/6500K

#### Color Accuracy (CRI):

82 CRI

**Technical Specifications (continued)****R9 Value:**

High color performance with R9 greater than 0

**Color Consistency:**

<5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

**Color Stability:**

LED color temperature is warranted to shift no more than 200K in color temperature over a 5-year period

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Installation****Installation Method:**

UL Type A/B, Hybrid

**Base Type:**

2G13

**Construction****Nominal Length:**

2 ft

**Bulb Shape:**

T8 U6

**Endcap Material:**

Plastic

**Enclosure Material:**

Glass

**Lens Finish:**

Frosted

**Compliance****Listings:**

UL Listed, UL Classified

**Environment:**

Suitable for use in dry and damp environments

**Fixture Rating:**

Suitable for use in enclosed fixtures

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

**DLC ID:**

S-V54W0X

**Certification Model Number:**

T10290(T8-U6G-SD-HYB)

**T20 Compliant:**

No

**California Title 24 JA8 Compliant:**

No

**California Energy Commission (CEC) Status:**

Lawful for Sales in California

**NSF Listed:**

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

**RoHS:**

Mercury and UV free. RoHS-compliant components.

**FCC:**

Complies with Part 15 of the FCC Rules


**Other****Compatible Products:**

See Dimmer and Ballast compatibility lists

**5-Year, No-Compromise Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

## Dimensions

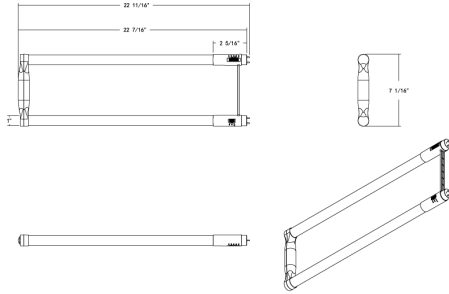

## Features

3 selectable wattage and 5 Color temperatures to choose from

Direct Replacement for Fluorescent Lamps: F32T8/32W, F32T8/30W, F32T8/28W, F32T8/25W

TYPE A - Plug and play compatible with most common commercial instant start T8 electronic ballasts

TYPE B - can be wired directly to line voltage 120-277V. Can be wired using Single or Double ended method

Works with both shunted and non-shunted sockets

## Ordering Matrix

Family	Wattage	Length/Material	CRI/Color Temp	Driver	Wiring Method	Installation Type
T8	Blank = 11.5/13/15W	U6G = Ubend 6", Glass U1G = Ubend 1", Glass	Blank = 80 CRI, CCT Adjustable 3000/3500/4000/5000/6500K	Blank = 120-277V	SD = Single & Double Ended	HYB = Hybrid