


Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

NSYEBAP25622

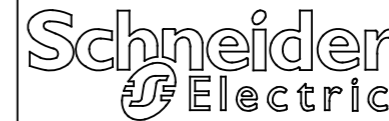

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Type Wire:	Copper or Aluminum Wire
Weight (lb):	0.83
Terminal Screw Driver Line Side:	8 mm Hex
Terminal Screw Driver Load Side:	8 mm Hex
UL Listed:	N/A
UL Recognized:	E60616 XCFR2
CSA File:	File 70361, Class 6228-01 (With wire classes B&C)
RoHS:	Yes
CE Marked:	Yes
IP20 Touch Protection from the Front	Yes
Flammability Rating:	UL 94 V0

Description:
Mounting:
Ampere Rating:
Max. Voltage Rating:
Terminal Material:
Wire Range - Line Side AWG/kcmil:
Wire Range - Load Side AWG/kcmil:
Short Circuit Current Ratings with Fuses:

Specification:

Enclosed Power Distribution Block
Panel
510 Amps CU / 410 Amps AL
600V AC/DC
Tin Plated Aluminum
6 - 250 CU / 6 - 250 AL
6 - 250 CU / 6 - 250 AL
Up to 100kA