

Product data sheet

Specifications

SQUARE D



Safety switch, VisiPacT, heavy duty, fused, viewing window, NEMA 4X, 240V, 200A, 2 pole, ground lugs

VH224DSGL

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Single Throw Safety Switch
Duty Rating	Heavy duty
Device Application	Heavy application
Disconnect Type	Fusible disconnect
Factory Installed Neutral	Field installed kit available
Number of Poles	2
Current Rating	200 A
Voltage Rating	250 V DC 240 V AC
Enclosure Rating	NEMA 4X stainless steel 304
Standard Motor Power Rating	15 hp at 240 V AC 50-60 Hz for 1 phase motors 25 hp at 240 V AC 50-60 Hz for 3 phase motors 60 hp at 240 V AC 50-60 Hz for 3 phase motors 40 hp at 250 V DC

Complementary

Short-circuit current	10 kA for H, K, J or R without fuse rejection clips 200 kA for R with fuse rejection clips 200 kA for J
Fuse type	H or K R or J
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	2-wire
Wire Size	AWG 6...250 kcmil copper or aluminium
Tightening torque	275 lbf.in (31.07 N.m) 0.02...0.2 in ² (13.3...127 mm ²) (AWG 6...250 kcmil)
Depth	8.937 in (227.000 mm)
Width	17.474 in (443.840 mm)
Height	28.9 in (734.06 mm)
Product Weight	59.26 lb(US) (26.88 kg)
Grounding Kit	Factory installation
Service Entrance	Suitable service entrance for USA Suitable service entrance for Mexico

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Environment

Certifications	UL listed file E2875
Standards	UL98 CSA C22.2 No 4 NOM-003-SCFI-2000

Ordering and shipping details

Category	US10DE100010
Discount Schedule	0DE1
GTIN	3606485893358
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	19.750 in (50.165 cm)
Package 1 Width	10.1250 in (25.7175 cm)
Package 1 Length	31.750 in (80.645 cm)
Package weight(Lbs)	57.10 lb(US) (25.9 kg)



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) **262**

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard **Yes**

Packaging without single use plastic **Yes**

[EU RoHS Directive](#) **Compliant**

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Again


Repack and remanufacture

Circularity Profile **No need of specific recycling operations**

Take-back **No**

Technical Illustration


Dimensions

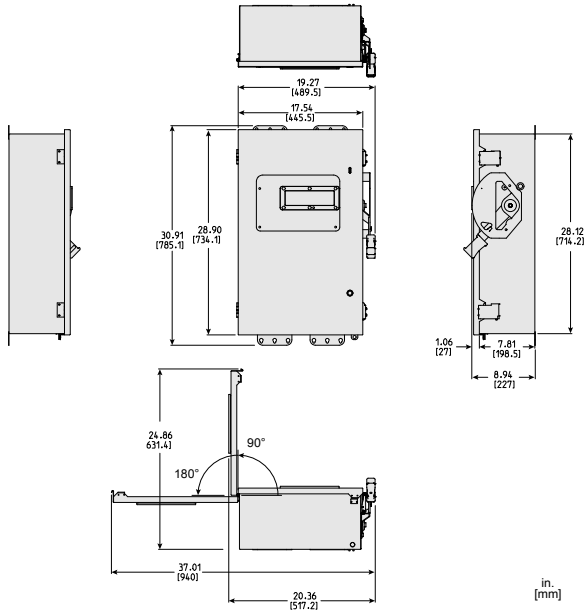

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Technical Illustration

Wiring diagram

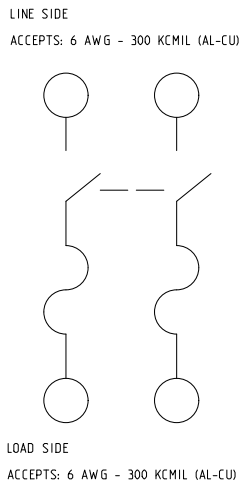

CATALOG NO. VH224DSGL
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Image of product / Alternate images

Alternative

