



Main

| | |
|-------------------------------|--|
| Range of Product | Harmony XB7 |
| Product or Component Type | Emergency stop push-button |
| Device short name | XB7 |
| Mounting diameter | 0.87 in (22 mm) |
| Sale per indivisible quantity | 10 |
| Shape of signaling unit head | Round |
| Type of operator | latching |
| Reset | Key release |
| Operator profile | Red mushroom Ø 40 mm, unmarked |
| Type of Keylock | Ronis 455 |
| Contacts type and composition | 1 NO + 1 NC |
| Connections - terminals | Screw clamp terminals, $\leq 2 \times 1.5 \text{ mm}^2$ with cable end EN/IEC 60947-1 Screw clamp terminals, $1 \times 0.34 \dots 2 \times 2.5 \text{ mm}^2$ without cable end EN/IEC 60947-1 |
| Device presentation | Monolithic product |

Complementary

| | |
|--|--|
| CAD overall width | 1.57 in (40 mm) |
| CAD overall height | 1.57 in (40 mm) |
| CAD overall depth | 2.83 in (72 mm) |
| Terminals description ISO n°1 | (21-22)NC (13-14)NO |
| Net Weight | 0.08 lb(US) (0.035 kg) |
| Device mounting | Fixing hole 0.89 in (22.5 mm) 22.3 +0.4/0 EN/IEC 60947-1 |
| Fixing center | $\geq 30 \times 40 \text{ mm}$ support panel) metal 0.04...0.24 in (1...6 mm) $\geq 30 \times 40 \text{ mm}$ support panel) plastic 0.08...0.24 in (2...6 mm) |
| Fixing mode | Fixing nut beneath head 17.70...21.24 lbf.in (2...2.4 N.m) |
| Contact operation | Snap action |
| Contacts usage | Standard |
| Positive opening | With EN/IEC 60947-5-1 appendix K |
| Mechanical durability | 100000 cycles |
| Tightening torque | 7.08...10.62 lbf.in (0.8...1.2 N.m) EN 60947-1 |
| Shape of screw head | Cross JIS No 1 Cross Philips no 1 Cross pozidriv No 1 Slotted flat Ø 4 mm Slotted flat Ø 5.5 mm |
| Short-circuit protection | 4 A cartridge fuse gG EN/IEC 60947-5-1 |
| [Ui] rated insulation voltage | 250 V 3)EN/IEC 60947-1 |
| [Uimp] rated impulse withstand voltage | 4 kV EN/IEC 60947-1 |
| [Ie] rated operational current | 0.1 A 250 V, DC-13, R300 EN/IEC 60947-5-1 0.22 A 125 V, DC-13, R300 EN/IEC 60947-5-1 0.75 A 240 V, AC-15, C300 EN/IEC 60947-5-1 1.5 A 120 V, AC-15, C300 EN/IEC 60947-5-1 |

| | |
|------------------------|---|
| Electrical durability | 1000000 Cycles, DC-13, 0.3 A 24 V 216000 cyc/mn 0.5 EN/IEC 60947-5-1 appendix C 1000000 Cycles, AC-15, 0.03 A 230 V 216000 cyc/mn 0.5 EN/IEC 60947-5-1 appendix C 1000000 cycles, AC-15, 0.09 A 240 V 108000 cyc/mn 0.5 EN/IEC 60947-5-1 appendix C |
| Electrical reliability | $\Lambda < 5 \times 10^{\exp(-7)}$ 17 V 5 mA IEC 60947-5-4 |

Environment

| | |
|---------------------------------------|---|
| Protective treatment | TH |
| Ambient Air Temperature for Storage | -40...158 °F (-40...70 °C) |
| Ambient Air Temperature for Operation | -13...158 °F (-25...70 °C) |
| Electrical shock protection class | Class II IEC 60536 |
| IP degree of protection | IP20 IEC 60529 rear face) IP65 IEC 60529 front face) |
| NEMA degree of protection | NEMA 12 UL 50 NEMA 3 UL 50 |
| Standards | EN/IEC 60947-5-5 IEC 60364-5-53 EN/ISO 13850 EN/IEC 60947-1 EN/IEC 60947-5-1 CSA C22.2 No 14 UL 508 EN/IEC 60204-1 |
| Product Certifications | CCC GOST |
| Vibration resistance | 5 gn 2...500 Hz)IEC 60068-2-6 |
| Shock resistance | 15 gn 11 ms) half sine wave acceleration IEC 60068-2-27 |

Ordering and shipping details

| | |
|-----------------------|-----------------------------|
| Category | 22464-PUSHBUTTONS, XB7-22MM |
| Discount Schedule | CS2 |
| GTIN | 3606480465659 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 2.65 oz (75.0 g) |
| Returnability | No |
| Country of origin | ID |

Packing Units

| | |
|------------------------------|------------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 5.91 in (15 cm) |
| Package 1 width | 6.30 in (16 cm) |
| Package 1 Length | 3.15 in (8 cm) |
| Unit Type of Package 2 | BAG |
| Number of Units in Package 2 | 10 |
| Package 2 Weight | 26.74 oz (758.0 g) |
| Package 2 Height | 6.30 in (16 cm) |
| Package 2 width | 5.91 in (15 cm) |
| Package 2 Length | 3.15 in (8 cm) |
| Unit Type of Package 3 | S01 |
| Number of Units in Package 3 | 50 |
| Package 3 Weight | 9.15 lb(US) (4.151 kg) |
| Package 3 Height | 5.91 in (15 cm) |
| Package 3 width | 5.91 in (15 cm) |
| Package 3 Length | 15.75 in (40 cm) |


Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Contractual warranty


| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Non-illuminated Pushbutton

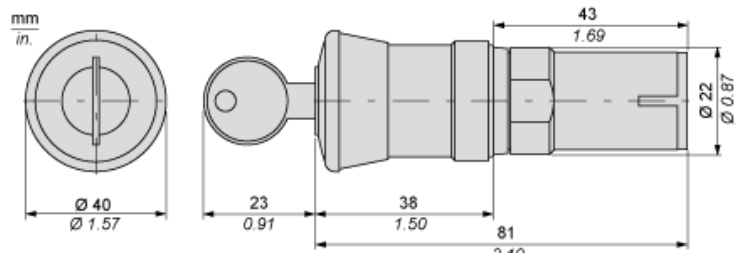

Mounting

Diameter of Finished Fixing Holes

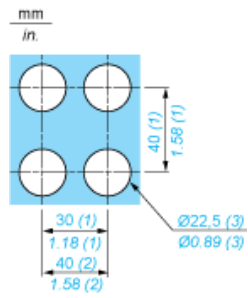

- (1) Minimum value.
- (2) 40 mm/1.58 in. for Emergency switching off pushbutton only.
- (3) Standard value: Ø 22.3 (0; + 0.4) mm/Ø 0.88 (0; + 0.02) in.

“U” Type Tag Connection



- (1) 6.5 mm/0.26 in. recommended, 7 mm/0.28 in. max.
- (2) M3 screw clamp terminal.

Wiring

