

DESCRIPTION

The H1499TAT is a small aperture low voltage Non-IC AIR-TITE™ housing for providing accent and task lighting. The H1499TAT is designed for use in non-insulated ceilings. Non-IC Housing is AIR-TITE™ but insulation must be kept 3 inches away from all sides of housing.

SPECIFICATION FEATURES

Housing

Formed of CRS with powder coat finish.

Plaster Frame

- Galvanized steel die-formed construction.
- The housing can be removed from plaster frame to provide access to the junction box.
- Plaster frame features include:
 - Patented regressed locking screw positioned for securing hanger bars from below the ceiling.
 - Cutouts for easily crimping hanger bars in position.
 - AIR-TITE aperture gasket is pre-installed.
 - HALO identity embossed on plaster frame

SLIDE-N-SIDE™ Junction Box

- Positioned to accommodate straight conduit runs
- Four 1/2" trade size conduit knockouts with true pry-out slots
- Slide-N-Side wire traps allow non-metallic sheathed cable to be installed without tools and without removing knockouts.
- Accepts a wide range of non-metallic (type NM) sheathed cables - the standard cable types used in lighting in both U.S. and Canada.
- Allows wiring connections to be made outside the junction box.

- Simply insert the cable directly into the trap after connections are made.
- Accommodates the following standard non-metallic sheathed cable sizes: (US) #14/2, #14/3, #12/2, #12/3 (Canada) #14/2, #14/3, #12/2

"Quick Connect" Connectors

Three quick connect wiring connectors included.

GOT NAIL! Pass-N-Thru™ Bar Hangers

- Pre-installed nail easily installs in regular lumber, engineered lumber and laminated beams.
- Safety and guidance system prevents snagging, ensures smooth straight nail penetration and allows bar hangers to be easily removed if necessary.
- Automatic levelling flange aligns the housing and lets you hold the housing in place with one hand while driving nails.
- Housing can be positioned at any point within 24" joist span.
- Pass-N-Thru™ feature allows bar hangers to be shortened without removing from plaster frame.
- Score lines allow "toolless" shortening for 12" joists.
- Bar hangers may be repositioned 90°.
- Integral T-bar clip snaps onto T-bars - no additional clips required.

Catalog #	Type
Project	
Comments	
Prepared by	Date

Socket

GU5.3 socket with reflector plate for bi-pin 12V MR-16 lamps.

Transformer

Integral 120V magnetic transformer steps line voltage down to lamp operating voltage. For lamps up to 50W.

Thermal Protector

Thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Labels

- UL/cUL Listed 1598 Luminaire
- UL/cUL Listed for Damp Location
- UL/cUL Listed for Wet Location, covered ceiling - with select trims
- UL/cUL listed for Feed Through
- Certified Under ASTM-E283 for air tight construction
- IP rated (Improper Lamp)



H1499TAT

4" Non-Insulated Ceiling AIR-TITE™ Low Voltage Recessed Housing

4" TRIMS

FOR USE IN NONINSULATED CEILINGS OR INSULATED CEILINGS WHERE INSULATION CAN BE KEPT 3" FROM ALL SIDES OF FIXTURE

Transformer Data:
 Primary: 120VAC, 60Hz
 Secondary: 11.5V±0.3V, 50VA
 Insulation system: Class H
 Nominal Amps with 50 watt, 12V rated Lamp: 0.50A
 Nominal Watts with 50 watt, 12V rated Lamp: 57W


airTITE™

Slide-N-Side™


GOT NAIL!™
Ready for Installation

Pass-N-Thru™
Hanger Bars

Quick Connect™

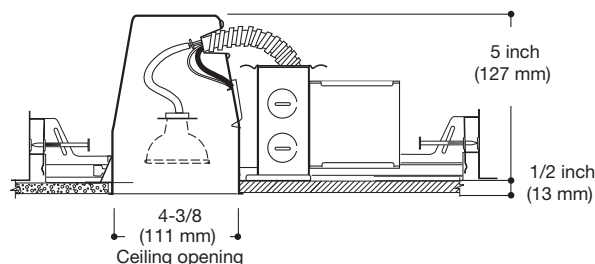

Top View

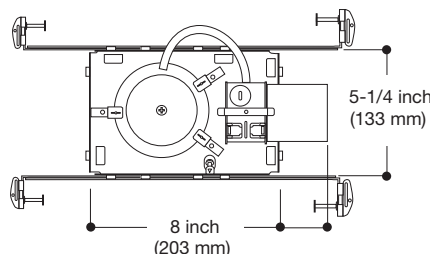

TRIMS

ORDERING INFORMATION

SAMPLE NUMBER: H1499TAT-1421W

Order housing and trims separately.

Housing

Trims

H1499TAT= 4" Non-Insulated Ceiling
Low Voltage Small
Aperture AIR-TITE Housing

REFLECTORS



1421

Reflector Cone - 35° Tilt

50W 12V MR16

1421W=White Reflector with White Trim Ring**1421C**=Specular Clear Reflector with White Trim Ring**1421AC**=Antique Copper Reflector, Antique Copper Trim Ring**1421H**=Haze Reflector with White Trim Ring**1421CG**=Champagne Gold Reflector with White Trim Ring**1421RG**=Residential Gold Reflector with White Trim Ring**1421MB**=Specular Black Reflector with White Trim Ring**1421SN**=Satin Nickel Reflector with Satin Nickel Trim Ring**1421TBZ**=Tuscan Bronze Reflector with Tuscan Bronze Trim Ring
OD: 5-1/16" (129mm)

ADJUSTABLES



1420

Slot Aperture - 35° Tilt

(Slot - 1 3/8" X 2 1/8")

50W 12V MR16

1420P=White**1420AC**=Antique Copper**1420SN**=Satin Nickel**1420TBZ**=Tuscan Bronze

OD: 5-1/16" (129mm)



1498

Eyeball - 30° Tilt

50W 12V MR16

1498P=White Eyeball, Black Baffle**1498AC**=Antique Copper Eyeball, Black Baffle**1498PB**=Polished Brass Eyeball, Black Baffle**1498W**=White Eyeball, White Baffle**1498BC**=Black Chrome Eyeball, Black Baffle**1498SN**=Satin Nickel Eyeball, Black Baffle**1498TBZ**=Tuscan Bronze Eyeball, Black Baffle

OD: 5-1/16" (129mm)



1497

Adjustable Mirror**Trim - 90° Tilt**

50W 12V MR16

1497P=White

OD: 5-1/16" (129mm)



1945

Metropolitan Ice Light

50W 12V MR16

1945=Clear Frosted**1945BLUE**=Blue Frosted

OD: 5-5/16" (135mm)




1946

Metropolitan Deco

50W 12V MR16

1946PB=Polished Brass Accent with Green Tint Translucent Rings**1946BC**=Black Chrome Accent with Green Tint Translucent Rings
OD: 5-5/8" (143mm)

BAFFLES




1419

1 7/8" Open with Baffle - 35° Tilt

50W 12V MR16

1419P=Black Baffle, White Trim Ring**1419AC**=Black Baffle, Antique Copper Trim Ring**1419W**=White Baffle, White Trim Ring**1419SN**=Black Baffle, Satin Nickel Trim Ring**1421TBZ**=Black Baffle, Tuscan Bronze Trim Ring

OD: 5-1/16" (129mm)




1493

Coilex® Baffle - 35° Tilt

50W 12V MR16

1493P=Black Baffle, White Trim Ring**1493AC**=Black Baffle, Antique Copper Trim Ring**1493BC**=Black Baffle, Black Chrome Trim Ring**1493PB**=Black Baffle, Polished Brass Trim Ring**1493W**=White Baffle, White Trim Ring**1493SN**=Black Baffle, Satin Nickel Trim Ring**1493TBZ**=Black Baffle, Tuscan Bronze Trim Ring

OD: 5-1/16" (129mm)



1453

Metal Baffle - 35° Tilt

50W 12V MR16

1453AC=Antique Copper Baffle, Antique Copper Trim Ring**1453SN**=Satin Nickel Baffle, Satin Nickel Trim Ring**1453TBZ**=Tuscan Bronze Baffle, Tuscan Bronze Trim Ring

OD: 5-1/16" (129mm)



1495

Gimbal Adjustable - 30° Tilt

50W 12V MR16

1495P=Satin White**1495AC**=Antique Copper**1495SN**=Satin Nickel**1495TBZ**=Tuscan Bronze

OD: 5-1/16" (129mm)



1496

Retractable Elbow Super Adjustable**- 60° Tilt**

50W 12V MR16

1496P=White Eyeball and Trim Ring**1496AC**=Antique Copper Eyeball and Trim Ring**1496SN**=Satin Nickel Eyeball and Trim Ring**1496TBZ**=Tuscan Bronze Eyeball and Trim Ring

OD: 5-1/16" (129mm)

SHOWER LIGHT



1951

Regressed Lens Shower Light

50W 12V MR16

1951P=Shower Light, White Trim Ring, Specular Reflector**1951ACS**=Shower Light, Antique Copper Trim Ring, Specular Reflector**1951SNS**=Shower Light, Satin Nickel Trim Ring, Specular Reflector**1951TBZS**=Shower Light, Tuscan Bronze Trim Ring, Specular Reflector

OD: 5-1/16" (129mm)

Accessories

Mounting Accessories

Filters and Lenses

The following filters and lenses can be substituted for the cover glass supplied for use with MR16 lamps.

Color Filters

L112=Red Gel Filter**L114**=Ultraviolet Dichroic Filter**L120**=Red Dichroic Filter**L121**=Amber Dichroic Filter**L122**=Yellow Dichroic Filter**L123**=Green Dichroic Filter**L124**=Daylight Blue Dichroic Filter**L125**=Blue Dichroic Filter**L127**=Cosmetic (2700°K) Dichroic Filter**L121**=Yellow Gel Filter**L121**=Amber Gel Filter

Optical Lenses

L100N=Diffuse Sand Blasted Lens. Provides an even beam spread from MR16 lamps-especially useful in wall washing.

L111=Soft Focus Lens. Smooths irregular beam pattern while maintaining high controlled illumination levels and beam angles.

L113=Prismatic Spread Lens. Provides a symmetrical broadening of MR16 lamp beams.

L115=Fans the MR16 beam to produce a wide rectangular illumination pattern.

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com