



UPC: 019813519180

Weight: 3.3 lbs

Project:	Type:
Prepared By:	Date:

Technical Specifications

Other

Description:

25W Emergency Inverter

Emergency Driver Compatibility:

[2" Downlight & Gimbal](#)

[Edge-lit Wafer](#)

[Field-Adjustable Edge-lit Wafer](#)

[Disk Surface Mounts](#)

[Edge-Lit Surface Mounts](#) (90 CRI models only)

[Performance Downlight](#) (All except for 33W models)

[Field-Adjustable Performance Downlight](#) (All except 9.5" models)

Recharge Time:

36HR

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Construction

Construction:

Sturdy galvanized steel

Electrical

Output Power:

25W

Output Voltage:

170V

Input Power (Max):

8W

Input Voltage:

100-277V

Emergency Operation:

90 min


Operating Temp:

0-50 degree

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	4	22.44	11.02	5.12
PALLET	168	22.24	5.31	35.83

Dimension

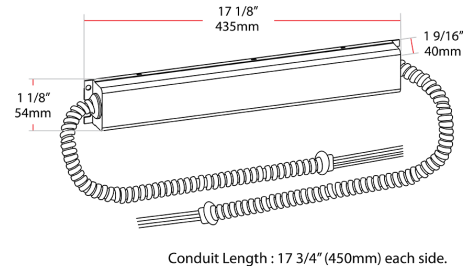

Features

For use with select RAB Commercial Downlights

Meets UL924 Requirements