


# Product

# End-of-Life

# Instructions

## POCKET BATTERY FOR MICROLOGIC

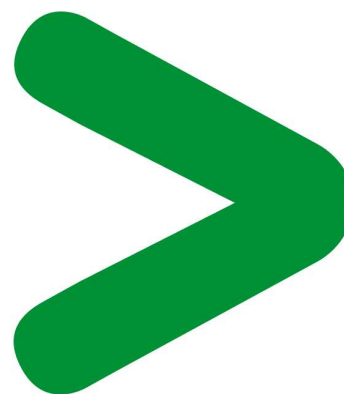

**Schneider**  
Electric

## Product End-of-Life Instructions – EoLI

### Product overview

Product Range: NSX 40A to 630A

Marketing Model/Name: LV434206

Size: H x L x D = 30 x 61 x 100 mm

Weight :            *with battery = 149 g*  
                         *without battery = 98,5 g*

### Purpose


The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

### Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy :

**Reuse → Separation for special treatment → Other dismantling → Shredding**

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

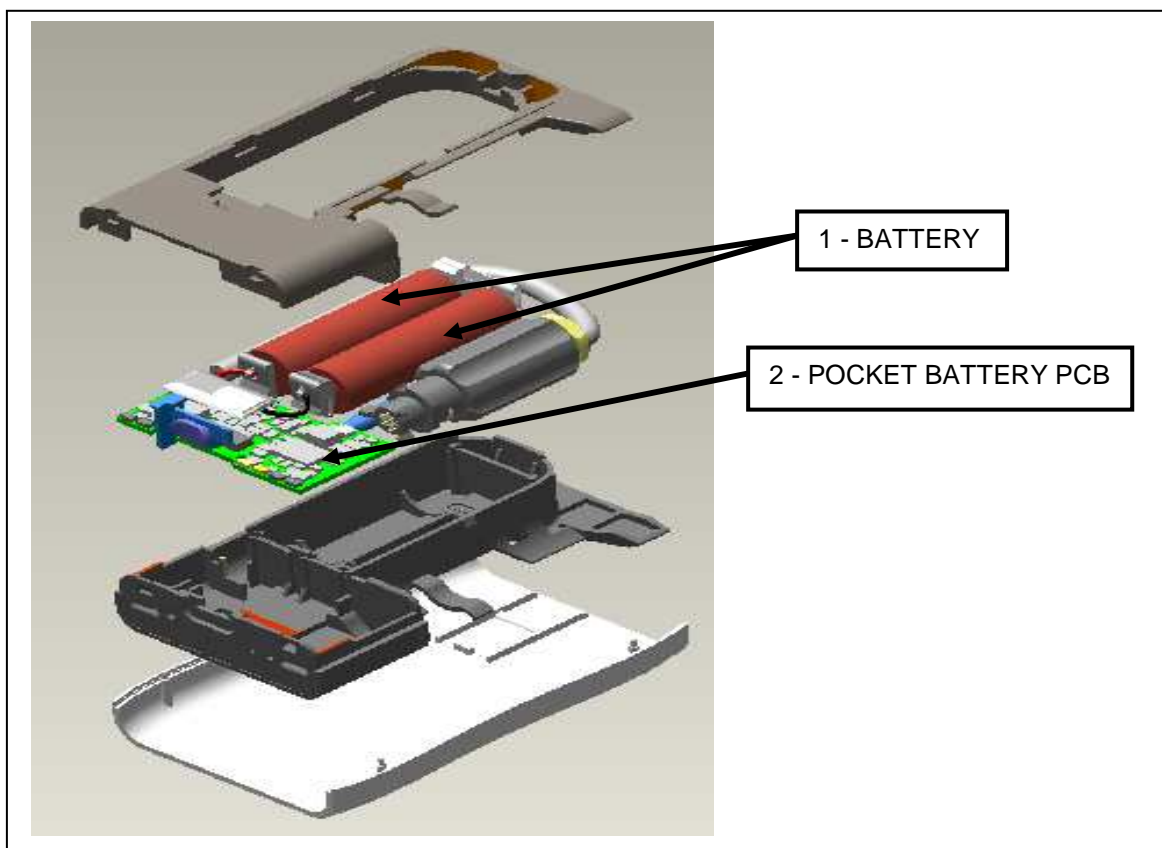

## Product End-of-Life Instructions – EoLI

Recommendation	Number on drawing	Components	Weight (in g)	Comment
Special treatment	1	POCKET BATTERY PCB	3,4	12,5 cm <sup>2</sup>
	2	BATTERY	50	

---

EoLI achieved with Schneider-Electric TT03 V5 procedure

---

### Schneider Electric Industries SAS

35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)