

Project: \_\_\_\_\_ Type: \_\_\_\_\_ Prepared By: \_\_\_\_\_ Date: \_\_\_\_\_



**Features and Benefits**

- Replacement for conventional fluorescent T5HO tubes
- Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast
- Double ended wiring method
- 50,000 hour Lifespan
- Rated for use in enclosed and open fixtures in dry or damp locations
- Diffused frosted lens will maintain the same light quality over time
- Instant on full brightness
- Environmentally friendly, no mercury used
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment - Splash Zone (Not for Direct Food Zone without additional fixture considerations)
- UL Classified, DLC Listed
- Emergency back up available. Catalog Numbers: DRI-5-EMGR-T8, DRI-10-EMGR-TYPE B
- Compatible with RAB specified 0-10V dimming system

<b>Technical Specifications</b>		
<p><b>Performance</b></p> <hr/> <p><b>Product Type:</b> Linear</p> <p><b>Input Wattage:</b> 25W</p> <p><b>Lumens (Nominal):</b> 3500lm</p> <p><b>Efficacy:</b> 140 lm/W</p> <p><b>Color Accuracy (CRI):</b> 82 CRI</p> <p><b>L70 Lifespan:</b> 50,000 Hours</p>	<p><b>Dimming:</b> Compatible with RAB specified 0-10V dimming system. Dimming capabilities were tested and verified on dimmable via an external accessory dimming system.</p> <p><b>Construction</b></p> <hr/> <p><b>Material:</b> Glass</p> <p><b>Bulb Shape:</b> T5</p> <p><b>Nominal Length:</b> 4FT</p> <p><b>Finish:</b> Frosted</p> <p><b>Base Type:</b> G5</p>	<p><b>For Use Outdoors in Open Fixtures:</b> No</p> <p><b>Beam Angle:</b> 180°</p> <p><b>Other</b></p> <hr/> <p><b>Equivalency:</b> 54W Fluorescent</p> <p><b>Warranty (Years):</b> RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <a href="http://rablighting.com/warranty">rablighting.com/warranty</a>.</p> <p><b>LED Characteristics</b></p> <hr/> <p><b>Color Temperature:</b> 5000K Daylight</p>

## Technical Specifications (continued)

### Electrical

**Power Factor:**

0.9

**Operating Temperature:**

-20°C - 45°C

**Input Voltage:**

120-277V AC

**Operating Frequency:**

50/60 Hz

### Electrical Characteristics

**THD:**

<20%

### Compliance

**UL Recognized:**

Yes

**UL Classified:**

Yes

**NSF Listed:**

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

**DLC Model Number:**

T5-25-48G-850-BYP

**CEC Status:**

Lawful for sale in California

**Application:**

Suitable for damp locations and totally enclosed fixtures.



**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements. DLC Product Code: PTP9U4G5

## Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	25	47.8	7.1	7.5
PALLET	750	49.2	39.4	49.6

## Wiring Diagram

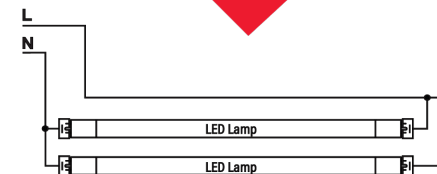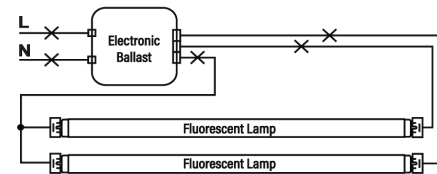

## Dimension

