



Color: Black

Weight: 6.3 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	36/28/22WW
120V	0.30A	Color Temp	3000/4000/5000K
208V	0.17A	Color Accuracy	90 CRI
240V	0.15A	L70 Lifespan	50,000 Hours
277V	0.13A	Lumens	3300/2750/2100 lm
Input Watts	36/28/22WW	Efficacy	95

Technical Specifications

Performance

Product Type:

Cylinder Wall Mount

Description :

Economical cylinders with field-adjustable color temperature, power and light distribution along with field-swappable optics to fit any indoor or outdoor application.

Wattage Equivalency:

200/180/140W

Input Wattage:

36/28/22W

Nominal Lumens:

3300/2750/2100lm

Efficacy:

95lm/W

Lifespan:

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Electrical

Driver:

Constant Current, 50-60 Hz, 120V-277V

THD:

≤20%

Power Factor:

≥0.9

Dimmable:

Yes, dimmable down to 5% on compatible 0-10V dimming systems. See Dimmer Compatibility List. Requires separate 0-10V DC dimming circuit.

Input Voltage:

120-277V

Operating Frequency:

50/60Hz

Input Current @ 120V (mA):

300mA

Input Current @ 208V (mA):

169mA

Input Current @ 240V (mA):

146mA

Input Current @ 277V (mA):

127mA

Operating Temperature:

-40°F to 120°F (-40°C to 45°C)

Flicker:

≤1%

Photocell:

Integrated photocell included with on/off switch

LED Characteristics

Beam Angle:

60° (installed)

Field swappable optics sold separately for 25°/40°/60° beam angle_

Light Distribution:

Selectable dip switch for up, down, or up/down light

Color Temperature:

3000/4000/5000K

Color Accuracy (CRI):

90 CRI

R9 Value:

High color performance with R9 greater than 0

Color Consistency:

<6-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Technical Specifications (continued)

Installation

Mounting:

Wall mount

Construction

Size:

6"

Shape:

Cylinder

Finish:

Black

Enclosure Material:

Die-casting aluminum + PC

Lens Finish:

Clear (installed)

Frosted lens accessory sold separately

Compliance

Listings:

UL Listed

Environment:

Suitable for use indoors and outdoors in dry, damp, or wet environments.

Fixture Rating:

Suitable for use in open fixtures

IP Rating:

IP65

Energy Star Approved:

No

DLC Listed:

No

Certification Model Number:

CD2002(CD34-6WK)

California Title 20 Compliant:

No

California Title 24 JA8 Compliant:

No

California Energy Commission (CEC) Status:

Lawful for Sales in California

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15 of the FCC Rules

Other

Compatible Accessories:

CD34REF-625D

25° reflector

CD34REF-640D

40° reflector

CD34REF-660D

60° reflector

CD34LENS-6FRW

6" frosted lens white

CD34LENS-6FRK

6" frosted lens black


CD34LENS-6FRZ

63" frosted lens bronze

5-Year, No-Compromise Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

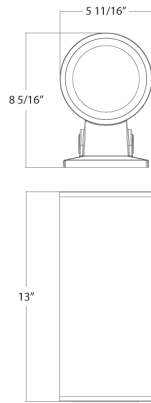

Features

- Aluminum extrusion housing and die-cast covers available in black, bronze, or white
- Field interchangeable optics sold separately for 25°/40°/60° beam angle
- Field-adjustable color temperature 3000/4000/5000K (indoor); 2700/3000/3500/4000/5000K (outdoor).
- Dimmable on 0-10V systems (indoor); integrated photocell (outdoor)

Ordering Matrix

Family	Size/Wattage	Mounting	Light Direction	CRI/Color Temp	Driver	Finish
CD34	6	W				K
	3 = 3", 10/8/6W 6 = 6", 36/28/22W or 30/24/18W 4 = 4", 20/16/12W	W = Wall	Blank = Selectable-Down, Up or Both	Blank = 90 CRI, 3000/4000/5000K	Blank = 120-277V, 0-10V Dimming	Z = Bronze K = Black W = White
<i>Surface or Pendant Mount: 6", 30/24/18W Wall Mount: 6", 36/28/22W</i>						