

JUNO®

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

4" IC 600 LUMEN WARMDIM® LED DOWNLIGHT NEW CONSTRUCTION

IC 1 LED (WD G4N 06LM) RECESSED HOUSING

WALL WASH TRIMS


PRODUCT DESCRIPTION

Dedicated LED, Air-Loc® sealed new construction housing with patented WarmDim® technology • LED color temperature warms while dimming to emulate the dimming performance of traditional incandescent light sources • Double wall, shallow housing construction allows for fit in 2 x 6 construction • Can be completely covered with insulation • Fully sealed housing stops infiltration and exfiltration of air, reducing heating and air cooling costs without the use of additional gaskets • LED housing is designed to provide 50,000 hours of life and is compatible with many standard Juno trims • 5 year limited warranty on LED components.

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- No harmful ultraviolet or infrared wavelengths
- No lead or mercury, RoHS compliant
- Comparable light output to 65W incandescent while consuming 12W

PRODUCT SPECIFICATIONS

LED Light Engine Proprietary patented (US Patent 8,710,754) micro processor controlled light engine emulates dimming performance of incandescent light source • Replaceable light engine attached to high purity aluminum, thermally conductive inner housing provides superior heat transfer to ensure long life of the LEDs • 3000K color temperature at full lumen output • 90 CRI minimum throughout dimming range.

Optical System Angle-cut aluminum reflector and specular clear kicker reflector directs light toward wall for uniform illumination on vertical surfaces while concealing LED optic assembly and minimizing glare • LEDs are concealed by high transmission diffusing lens.

Aesthetic Trim Selections Recessed lensed wall wash trim • Shadow free, knife edge design blends seamlessly into ceiling • Reflector finishes include clear, haze, wheat haze and white painted.

LED Driver Dedicated 120 volt driver • Power factor > 0.9 • Dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers • For a list of compatible dimmers, see [JUNOICLED-DIM](#) • Mounted inside housing for easy access from below ceiling.

Life Rated for 50,000 hours at 70% lumen maintenance.

Labels ENERGY STAR® Certified when used with select trims • Can be used to comply with 2019 Title 24, Part 6, JA8 high efficacy LED light source requirements with select trims • UL listed for U.S. and Canada, through-branch wiring and damp locations • Union made • UL and cUL • CP option is compatible with spray foam insulation with an R-value of 3.2 per inch or less.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

HOUSING FEATURES

Housing Designed for use in IC (insulated ceiling) or non-IC construction • Aluminum housing sealed for Air-Loc® compliance • Housing is vertically adjustable to accommodate up to a 1 1/2" ceiling thickness.



Junction Box Pre-wired junction box provided with (6) 1/2" and (1) 3/4" knockouts, (4) knockouts for 12/2 or 14/2 NM cable and ground wire • UL listed and cUL listed for through-branch wiring, maximum 6 #12 branch circuit conductors • Junction box provided with removable access plates • Knockouts equipped with pryout slots • Quick connect electrical connectors supplied as standard for fast, secure installation.

Mounting Frame 22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation.

Real Nail 3 Bar Hangers Patented (US Patent D552,969) Real Nail® 3 bar hangers: telescoping system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Includes removable nail for repositioning of fixture in wood joist construction • Integral T-bar notch and clip for suspended ceilings.



DIMENSIONS

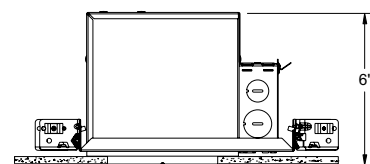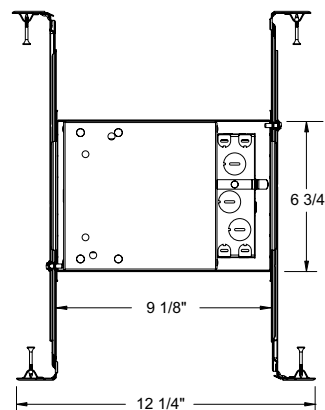


4 1/2" CEILING CUTOUT

ELECTRICAL DATA

Dedicated 120V Only Driver

120V	
Input Power	10W (+/- 5%)
Input Current	0.08A
Frequency	50/60 Hz
EMI/RFI	FCC Title 47 CFR, Part 15 Class B (residential)
Minimum starting temp	-20°C

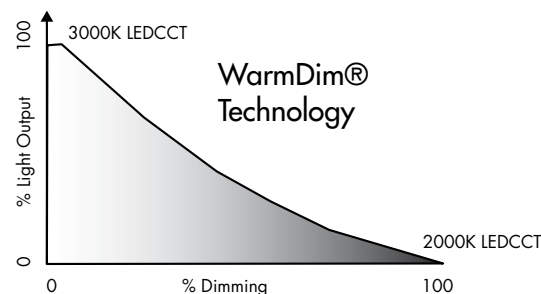

4" IC 600 LUMEN WARMDIM® LED DOWNLIGHT NEW CONSTRUCTION

IC1LED (WD G4N 06LM) RECESSED HOUSING
WALL WASH TRIMS

ORDERING INFORMATION Housing and trim can be ordered together or separate, but will always ship separately.

Example: IC1LED WD G4N 06LM 30K 90CRI 120 FRPC

Series	Dynamic Feature	Generation	Lumens	Color Temperature	CRI	Voltage	Driver	Territory
IC1LED 4" LED IC New Construction Downlight	WD Warm Dim	G4N Generation 4 New	06LM 600 Nominal Lumens	30K 3000K	90CRI 90+ CRI	120 120V	FRPC Forward/Reverse Phase Cut	CP Chicago Plenum

Trim/Description



39 BBL	4" Lensed Wall Wash Cone Trim - Black, Black Trim Ring
39 CWH	4" Lensed Wall Wash Cone Trim - Clear Alzak®, White Trim Ring
39 HZWH	4" Lensed Wall Wash Cone Trim - Haze, White Trim Ring
39 WHZWH	4" Lensed Wall Wash Cone Trim - Wheat Haze, White Trim Ring
39 WWH	4" Lensed Wall Wash Cone Trim - White, White Trim Ring



Trim Size: 5" O.D.

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.


4" IC 600 LUMEN WARMDIM® LED DOWNLIGHT NEW CONSTRUCTION

IC1LED (WD G4N 06LM) RECESSED HOUSING
WALL WASH TRIMS

PHOTOMETRICS

PHOTOMETRIC REPORT

Test Report #: PT11141801
Catalog No: IC1LED WD G4N 06LM 30K
90CRI 120 with 39 CWH Trim
Luminaire Spacing Criterion: 0.76
Luminaire LPW: 61



CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	738
5	727
15	566
25	362
35	183
45	69
55	31
65	16
75	6
85	0
90	0

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0 - 30°	383	N/A	62.6
0 - 40°	504	N/A	82.3
0 - 60°	600	N/A	98.0
0 - 90°	612	N/A	100.0

LUMINANCE (Average cd/m²)

Degrees	Average Luminance
45	18328
55	10020
65	7155
75	4499
85	0

FOOTCANDLES ON WALL FROM MULTIPLE FIXTURES

Fixture Distance to Wall	2'			3'		
	Fixture Centers (spacing)	2'	3'	3'	4'	4'
DISTANCE FROM CEILING	1'	4 4 4	3 3 3	2 2 2	2 2 2	2 2 2
	2'	10 10 10	7 6 7	4 4 4	3 3 3	3 3 3
	3'	15 15 15	12 10 12	6 6 6	5 4 5	5 4 5
	4'	17 18 17	13 12 13	7 7 7	6 6 6	6 6 6
	5'	16 16 16	11 11 11	9 9 9	7 7 7	7 7 7
	6'	14 14 14	10 10 10	9 9 9	7 7 7	7 7 7
	7'	12 12 12	9 9 9	9 9 9	7 7 7	7 7 7
	8'	11 11 11	8 8 8	8 8 8	6 7 6	6 7 6
	9'	9 9 9	6 6 6	7 7 7	5 6 5	5 6 5

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field.