

Description

The H7 recessed housing is the standard in the industry for both light commercial and residential applications. H7 series features full-frame design, robust construction, feed-through listing, Got Nail! bar hangers; and may support use of higher wattage lamps. A wide variety of trims allows a number of different lighting effects to be created with one basic housing. H7ICT is for installations where the housing will be in direct contact with insulation*. H7ICT may be converted into Air-Tite installation when used with Air-Tite trims. May be retrofit with compatible Halo LED lighting systems.

Catalog #		Type
Project		
Comments		Date
Prepared by		

Specification Features

Housing

- Single wall aluminum housing
- Aluminum construction for greater heat dissipation

Socket Plate

- Rigid socket plate adjusts and locks without tools for various lamp sizes
- Socket plate and bracket may be removed when using socket supporting trims

Plaster Frame

- Housing adjusts in plaster frame to accommodate up to 1" ceiling thickness
- Galvanized steel construction
- Plaster frame features include:
 - Regressed locking screw for securing hanger bars
 - Cutouts for easily crimping hanger bars in position
 - Halo name embossed on plaster frame
 - The housing may be removed from plaster frame to provide access to the junction box

Got Nail!™ Bar Hanger Bracket

Bar Hanger Features include:

- Pre-installed nail easily installs in regular lumber, engineered lumber and laminated beams
- Safety and guidance system prevents snagging, ensures smooth straight nail penetration and allows bar hangers to be easily removed if necessary
- Automatic leveling flange aligns the housing and lets you hold the housing in place with one hand while driving nails
- Five additional mounting points
- Mounting point on top for hanger wire connection
- Integral T-bar clips snaps onto T-bars - no additional clips required

q-Channel bars with Pass-N-

Thru™

- q-Channel bars feature an unique inverted "q" interlocking channel for rigidity and stability
- Pass-N-Thru™ feature allows bars to cross-over for tool-less shortening in tight spaces less than 12" without removing from the plaster frame. Push bars together and flex at score hole break points
- Housing can be positioned at any point within 24" joist span
- Bar hangers may be repositioned 90° on the frame

Slide-N-Side™ Junction Box

Junction box features include:

- Slide-N-Side™ connectors allow non-metallic sheathed cable for both U.S. and Canada to be installed without tools and without removing knockouts
 - Allows wiring connections to be made outside the junction box
 - Simply insert the cable directly into the trap after connections are made
 - accommodates the following standard non-metallic sheathed cable types: (US) #14/2, #14/3, #12/2, #12/3 (Canada) #14/2, #14/3, #12/2
- Positioned to accommodate straight conduit runs
- Seven 1/2" trade size conduit knockouts with true pry-out slots
- cULus Listed 26 in3 box volume
- Listed for through branch (8) No. 12 AWG branch circuit 90° C conductors through the box

Quick Connect™

- Three 4-port push-in "Quick Connect" wire nuts included in junction box
- Speed installation and increase reliability
- No additional wire nuts required
- Simply strip and insert supply wires

Socket

- Porcelain socket with nickel plated brass screw shell
- Snap-in springs secure socket to socket plate, and may be detached when using socket supporting trims
- Overspray protector included

Thermal Protector

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation

Trims

Halo Fit-All concept offers multiple trim options in a variety of design styles, and functional beam distributions to control beam angle and lumen delivery in accommodating various lamp types including Halogen, CFL and LED

Compliance

- cULus Listed 1598 Luminaire
- cULus Listed Damp Location
- cULus Listed for Wet Location, covered ceiling, with select trims
- cULus Listed for direct contact with insulation and combustible material*
- cULus Listed for feed through
- RoHS compliant
- Options to meet Trade Agreements Act requirements

*Not to be used in direct contact with spray foam insulation (Consult NEMA LSD57-2013)




H7ICT

6" IC, New Construction, 120V

FOR USE IN INSULATED CEILINGS

FOR DIRECT CONTACT WITH INSULATION*

Dimensions

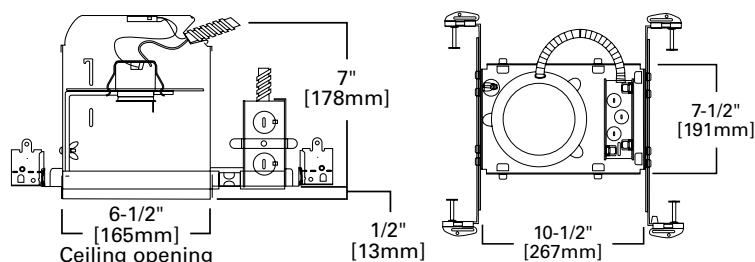

Special Features

Got-Nail!™ bar hangers
q-Channel bars with Pass-N-Thru™
Slide-N-Side™ junction box
Quick Connect™ push wire nuts

Ordering Information

Sample Number: H7ICT 6110WB

Order housing, trim and lamp (by others) separately for a complete luminaire.

Domestic Preferences⁽¹⁾

[Blank] = Standard

TAA = Trade Agreements Act

Housing

H7ICT = 6" IC, New Construction, 120V

Trims

Reflectors			
 30 Reflector, Self-flange $\diamond$ OD: 7-1/4" [184mm] 30HAT =Haze Reflector, White Trim 30RGAT =Residential Gold Reflector, White Trim 30CAT =Clear Specular Reflector, White Trim	 312 Coilex® Baffle OD: 7-1/4" [184mm] 312W =White Coilex Baffle and Trim 312P =Black Coilex Baffle, White Trim	 78 BR/PAR30 Eyeball 30° Tilt, Self-flange $\diamond$ OD: 8" [203mm] 78P =White Eyeball and Trim 78PAT =White Eyeball and Trim, Air-Tite 78SN =Satin Nickel Eyeball and Trim 78TBZ =Tuscan Bronze Eyeball and Trim	
 30SBAT Reflector, Self-flange $\diamond$ OD: 7-1/4" [184mm] 30SBAT =Black Specular Reflector, Self-flange	 353 Metal Baffle OD: 7-1/4" [184mm] 353SN =Satin Nickel Baffle and Trim 353TBZ =Tuscan Bronze Baffle and Trim	 376 PAR30 Regressed Gimbal 30° Tilt, Self-flange OD: 7-1/4" [184mm] 376W =White Baffle and Trim 376P =Black Baffle and White Trim	
 404 Specular Reflector OD: 7-1/4" [184mm] 404C =Clear Specular Reflector, White Trim 404H =Haze Reflector, White Trim 404SN =Satin Nickel Reflector and Trim 404TBZ =Tuscan Bronze Reflector and Trim	 6100 Tapered Metal Baffle with (2) Trim Rings OD: 7-1/8" [181mm] 6100WB =White Baffle, Narrow and Wide White Trims (included) 6100BB =Black Baffle, Narrow and Wide White Trims (included)	 378 PAR30 Regressed Gimbal with Splay 25° Tilt, Self-flange OD: 7-1/4" [184mm] 378P =White Splay and Trim 378 =Clear Specular Splay and White Trim	
 426 Reflector Cone OD: 7-1/4" [184mm] 426 =Clear Specular Reflector Cone, White Trim 426MB =Black Specular Reflector Cone, White Trim 426H =Haze Reflector Cone, White Trim 426SN =Satin Nickel Reflector Cone and Trim 426TBZ =Tuscan Bronze Reflector Cone and Trim	 6101 Straight Metal Baffle with (2) Trim Rings OD: 7-1/8" [181mm] 6101WB =White Baffle, Narrow and Wide White Trims (included) 6101BB =Black Baffle, Narrow and Wide White Trims (included)	 420 BR/PAR30 Regressed Eyeball 30° Tilt, Self-flange OD: 7-1/4" [184mm] 420W =White Eyeball, Baffle and Trim 420P =White Eyeball, Black Baffle, White Trim	
 429 Dayform White Cone OD: 7-1/4" [184mm] 429P =White Reflector and Trim	 6102 Tapered Metal Baffle, Self-flange OD: 7-3/4" [197mm] 6102WB =White Baffle and Trim 6102BB =Black Baffle, White Trim	 478 PAR38 Adjustable Regressed Gimbal with Splay 25° Tilt, Self-flange OD: 7-1/4" [184mm] 478P =White Splay and Trim	
 4041 White Reflector, Self-flange OD: 7-1/4" [184mm] 4041P =White Reflector and Trim	 6103 Straight Metal Baffle, Self-flange OD: 7-3/4" [197mm] 6103WB =White Baffle and Trim 6103BB =Black Baffle, White Trim	 6130 BR/PAR30 Eyeball 35° Tilt, Self-flange OD: 7-3/4" [197mm] 6130WH =White Eyeball and Trim	
 4261 White Reflector Cone, Self-flange OD: 7-1/4" [184mm] 4261P =White Reflector and Trim	 6108 Coilex® Straight Plastic Baffle, Self-flange OD: 7-3/4" [197mm] 6108WB =White Plastic Straight Coilex Baffle, White Trim 6108BB =Black Plastic Straight Coilex Baffle, White Trim 6108BKBB =Black Plastic Straight Coilex Baffle, Black Trim	 6170 PAR38 Gimbal 25° Tilt, Self-flange OD: 7-3/4" [197mm] 6170WH =White Gimbal and Trim 6170BK =Black Gimbal and Trim 6170SN =Satin Nickel Gimbal and Trim 6170TBZ =Tuscan Bronze Gimbal and Trim	
 6106 Straight Reflector Cone, Self-flange OD: 7-3/4" [197mm] 6106SC =Specular Reflector, White Trim	 6109 Coilex® Tapered Baffle, Self-flange OD: 7-3/4" [197mm] 6109WB =White Tapered Coilex Baffle, White Trim 6109BB =Black Tapered Coilex Baffle, White Trim 6109BKBB =Black Tapered Coilex Baffle, Black Trim	 6215 PAR30 Double Gimbal 35°-50° Tilt, Self-flange OD: 7-3/4" [197mm] 6215WH =White Gimbal and Trim 6215BK =Black Gimbal and Trim 6215SN =Satin Nickel Gimbal and Trim 6215TBZ =Tuscan Bronze Gimbal and Trim	
 6107 Tapered Reflector, Self-flange OD: 7-3/4" [197mm] 6107SC =Specular Reflector, White Trim	 6110 Perftex Baffle, Self-flange OD: 7-3/4" [197mm] 6110WB =White Perftex Baffle and Trim 6110BB =Black Perftex Baffle, White Trim 6110BKBB =Black Perftex Baffle and Trim	 6222 Regressed PAR30 Adjustable 45° Tilt, Self-flange OD: 7-3/4" [197mm] 6222WB =White Baffle and Trim 6222BB =Black Baffle and Trim 6222SC =Specular Clear Reflector, White Trim 6222H =Haze Reflector, White Trim	
 6120 Full Cone Reflector, Self-flange $\diamond$ OD: 7-3/4" [197mm] 6120WH =White Reflector and Trim 6120SN =Satin Nickel Reflector and Trim 6120TBZ =Tuscan Bronze Reflector and Trim	 6125 Full Cone Baffle, Self-flange $\diamond$ OD: 7-3/4" [197mm] 6125WB =White Baffle and Trim 6125BB =Black Baffle, White Trim 6125BKBB =Black Baffle and Trim	 170 Albalite Lens with Reflector $\diamond$ OD: 8" [203mm] 170P =Frosted Albalite Glass Lens, White Trim 170PS =Frosted Albalite Glass Lens, White Plastic Trim, Showerlight, Air-Tite	
 6121 Shallow Full Cone Reflector, Self-flange OD: 7-3/4" [197mm] 6121WH =White Reflector and Trim	 6126 Shallow Full Cone Baffle, Self-flange OD: 7-3/4" [197mm] 6126WB =White Baffle and Trim 6126BB =Black Baffle, White Trim	 171 Drop Opal Lens with Reflector $\diamond$ OD: 8" [203mm] 171P =Drop Opal Glass Lens, White Trim 171PS =Drop Opal Glass Lens, White Plastic Trim, Showerlight, Air-Tite	
Baffles	Adjustable - Eyeballs & Gimbals	 172 Dome Lens with Reflector $\diamond$ OD: 7-3/4" [197mm] 172PS =Frosted Glass Dome, White Plastic Trim 172SNS =Frosted Glass Dome, Satin Nickel Plastic Trim 172TBZS =Frosted Glass Dome, Tuscan Bronze Plastic Trim	
 310 Coilex® Baffle OD: 7-1/4" [184mm] 310W =White Coilex Baffle and Trim 310P =Black Coilex Baffle, White Trim 310SN =Black Coilex Baffle, Satin Nickel Trim 310TBZ =Black Coilex Baffle, Tuscan Bronze Trim	 74 PAR30 Eyeball 30° Tilt, Self-flange OD: 8" [203mm] 74P =White Eyeball and Trim		

Notes: (1) Only product configurations with this designated prefix are built to be compliant with the Trade Agreements Act of 1979 (TAA). Please refer to DOMESTIC.PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements. Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.

*Outdoor rated lamp only (purchase separately)

continued

Ordering Information

Sample Number: H7ICT 6110WB
 Order housing, trim and lamp (by others) separately for a complete luminaire.

Domestic Preferences⁽¹⁾

[Blank] = Standard
 TAA = Trade Agreements Act

Housing

H7ICT = 6" IC, New Construction, 120V

Trims

Lenses & Wet Location Showerlights	Open, Splay & Wall Wash
 173 Fresnel Lens with Reflector ◊ OD: 8" [203mm] 173P=Fresnel Glass Lens, White Trim 173PS=Fresnel Glass Lens, White Plastic Trim, Showerlight, Air-Tite	 300 Open Trim with Fixed Socket Bracket. Self-flange OD: 7-1/4" [183mm] 300P=Self-flange with White Open Trim 300SN=Self-flange with Satin Nickel Open Trim 300TBZ=Self-flange with Tuscan Bronze Open Trim
 6145 Open Wet Location, Shallow Reflector, Self-flange - Showerlight* OD: 7-3/4" [197mm] 6145WH=White Reflector and Trim 6145SN=Satin Nickel Reflector and Trim 6145TBZ=Tuscan Bronze Reflector and Trim	 327 White Splay Trim with Fixed Socket Bracket, Self-flange OD: 7-3/4" [197mm] 327P=White Splay Trim with Socket Bracket
 6146 Open Wet Location, Full Reflector, Self-flange - Showerlight* OD: 7-3/4" [197mm] 6146WH=White Reflector and Trim 6146SN=Satin Nickel Reflector and Trim 6146TBZ=Tuscan Bronze Reflector and Trim	 328 White Splay Trim OD: 7-3/4" [197mm] 328P=White Splay Trim
 6150 Frost Dome Glass Lens, Self-flange OD: 7-3/4" [197mm] 6150WH=Frost Dome Glass Lens with Reflector, White Plastic Trim 6150SN=Frost Dome Glass Lens with Reflector, Satin Nickel Plastic Trim 6150TBZ=Frost Dome Glass Lens with Reflector, Tuscan Bronze Plastic Trim	 430 Wall Wash with Baffle & Full Reflector ◊ OD: 7-1/4" [183mm] 430W=White Baffle, with Upper Reflector, White Trim 430P=Black Baffle, with Upper Reflector, White Trim
 6162 Drop Opal Plastic Lens, Self-flange - Showerlight OD: 7-3/4" [197mm] 6162WH=Drop Opal Plastic Lens with Reflector, White Plastic Trim	Accessories Designer Finish Trim Rings TRM6C=Chrome TRM6SN=Satin Nickel TRM6TBZ=Tuscan Bronze TRM6MB=Black Metal TRM7MB=Black plastic Metal 7 1/4" OD. Compatible with 310*, 312*, 376, 378, 400, 404, 405, 410, 416, 419, 420, 424, 425, 426*, 429*, 455CG, 455SC, 456P, 456W, 477, 478, 1412, 1416, 1475.
 6230 Squirrel Frost Glass Lens, Metal Trim - Showerlight OD: 7-1/4" [183mm] 6230AH=Frost Glass Lens, Aluminum Haze Squirrel Trim 6230PN=Frost Glass Lens, Polished Nickel Squirrel Trim 6230SN=Frost Glass Lens, Satin Nickel Squirrel Trim 6230TBZ=Frost Glass Lens, Tuscan Bronze Squirrel Trim	Oversized Trim Rings OT400P=6" ID x 9-1/4" OD, Oversized white metal trim ring for designated 6" trims. OT403P=6" ID x 8" OD, Oversized gloos white plastic trim ring for designated 6" trims.
 6255 Soft Square, Frost Curve Glass Lens, Self-flange - Showerlight OD: 7-1/4" [183mm] 6255WH=Frost Curve Glass Lens with Reflector, White Plastic Trim 6255SN=Frost Curve Glass Lens with Reflector, Satin Nickel Plastic Trim 6255TBZ=Frost Curve Glass Lens with Reflector, Tuscan Bronze Plastic Trim	H930 R/PAR Lamp Aiming Accessory H930=For H7T, H7RT, H7ICT, H7ICAT, H7RICT, H7RICAT housings with 310 and 426 trims. Allows lamp to be aimed up to 30° from vertical and rotated 358°. See housing-trim selection for lamp listings. *Originally supplied with TRM6P white metal trim rings. All others are supplied with white plastic trim rings.

Notes: (1) Only product configurations with this designated prefix are built to be compliant with the Trade Agreements Act of 1979 (TAA). Please refer to [DOMESTIC PREFERENCES](#) website for more information. Components shipped separately may be separately analyzed under domestic preference requirements. Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.

*Outdoor rated lamp only (purchase separately)