

STAINLESS STEEL LL CONDUIT BODY

Features:

- Manufactured in Type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Solid stainless construction permits easy installation using ordinary hand tools
- The flat back design allows extra wiring capacity
- No minimum package qty. required
- Cover and Gasket set included
- Form 8 style


Certifications and Compliances:

- UL 514A Listed
- UL File # E307133
- CSA C22.2 No. 18.1
- Intended for installation in accordance with Article 314 of
- ANSI/NFPA 70, "National Electrical Code" (NEC)
- Approved for Wet Locations



Material:

- Body: 316SS
- Gasket: Neoprene
- Cover and Screws: 316SS

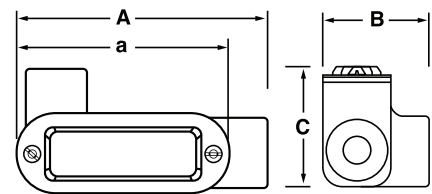

Applications:

To connect and change direction of conduit runs. Can be used as pulling fittings. Accessible wiring chamber provides a spacious location to make splices.

Part Number	Trade Size (in)	A (in)	B (in)	C (in)	a (in)	Cubic Inches (in ³)	Weight (each) per (lb)
S60500LL00	½	5.132	2.132	1.700	4.320	4	1.00
S60700LL00	¾	5.739	2.474	1.975	4.950	7	1.40
S61000LL00	1	6.680	2.790	2.225	5.650	11	2.00
S61500LL00	1½	8.868	3.585	3.095	7.810	35	4.40
S62000LL00	2	11.274	4.610	3.353	10.00	71	6.85

All dimensions are for informational purposes only *Tolerances +/- 5%



For more info visit atkore.com/calbrite

