

STAINLESS STEEL TB CONDUIT BODY

Features:

- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Solid stainless construction permits easy installation using ordinary hand tools
- The flat back design allows extra wiring capacity
- No minimum package qty. required
- Cover and Gasket set included
- Form 8 Style

Certifications and Compliances:

- UL 514A Listed
- UL file number _ E307133
- CSA C22.2 No. 18.1
- Approved for Wet Locations
- Intended for installation in accordance with Article 314 of ANSI/NFPA 70, “National Electrical Code” (NEC)

Materials:


- Body - 316SS
- Gasket - Neoprene
- Cover and Screws - 316SS

Applications:

To connect and change direction of conduit runs. Can be used as pulling fittings. Accessible wiring chamber provides a spacious location to make splices.

Industries Commonly Served:

- Food & Beverage Production
- Marine & Coastal Facilities
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical
- Pulp & Paper Mills
- Along with other corrosive environments

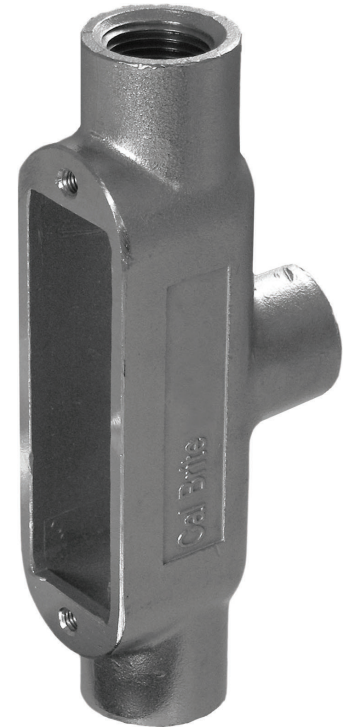

Part Number	Trade Size (in)	A (in)	B (in)	C (in)	a (in)	Cubic Inches (in)	Weight each per (lb)
S60500TB00	½	5.994	1.350	2.847	4.320	5	1.100
S60700TB00	¾	6.538	1.550	3.215	4.950	9	1.750
S61000TB00	1	7.690	1.750	3.234	5.650	13	2.250
S61500TB00	1½	9.923	2.530	4.150	7.810	35	5.250
S62000TB00	2	12.554	3.500	4.500	10.000	77	7.900

All dimensions are for informational purposes only *Tolerances +/- 5%

