

FEATURES & SPECIFICATIONS

INTENDED USE — Provides maintenance-free, energy-efficient general purpose and/or accent lighting in residential and commercial indoor applications. Designed for use with a variety of Lithonia Lighting decorative sconce diffusers (see compatibility chart below) to create a look that perfectly compliments any décor. Ideal for lighting hallways or accenting seating areas.

CONSTRUCTION — Formed aluminum backplate.

Decorative diffusers sold separately (see compatibility chart below).

OPTICS — The AC-driven LED board contains 3000K high-performance LEDs that maintain 720 lumens output at 50,000 hours of life.

ELECTRICAL — 11.2 Watts. LED driver is 120V and operates at 60Hz.

Actual wattage may differ by +/-10% when operating at 120V +/- 10%.

Fully dimmable down to 10%. Works with most standard incandescent dimmers. See chart on back of sheet for suggested dimmers.

INSTALLATION — For indoor applications only.

All mounting hardware included. Uses standard 4" J-box.

LISTINGS — UL Listed to U.S. and Canadian safety standards. Quality tested in accordance with IESNA LM-79.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Catalog Number
Notes
Type

Decorative Indoor SWBLED

HIGH-PERFORMANCE LED WALL SCONCE BACKPLATE
ADA 4.4 COMPLIANT



Compatible Decorative Diffusers

The SWBLED Series is designed to operate with the following decorative diffusers. See diffuser spec sheet for diffuser specifications.

DLSD1, DLSD2, DLSD3, DLSD4, DLSD5, DLSD6, DLSD7, DLSD8, DLSD9, DLSD10, DLSD11, DLSD12, DLSD13, DLSD14, DLSD15, DLSD16, DLSD17



DLSD1



DLSD8



DLSD14



DLSD4

Dimensions

All dimensions are inches (centimeters)

Width: 5-1/2" (14)

Length: 5-7/8" (14.9)

Height*: 1-7/16" (3.6)

* Extension from the wall.

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Example: SWBLED

SWBLED	
Series¹	
SWBLED	LED wall sconce backplate


Notes

1 Decorative diffusers must be ordered separately.

SWBLED — LED Wall Sconce Backplate

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.

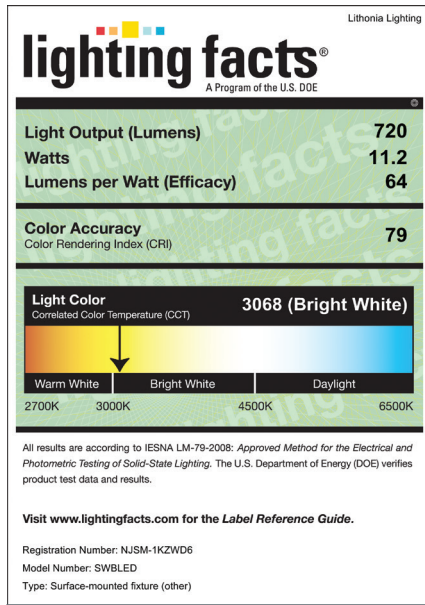

Suggested Dimmers

The MDP Series is designed to operate with most standard Triac Based (Forward Phase-Control or Leading Edge) dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested with the MDP Series and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Series	Part Number(s)
Leviton	Illumitech	IPI06-XXX
Leviton	Trimatron	6602-1, 6681-X, 6683-X, 6684-X, 700-X, 705-X
Leviton	SureSlide	6631
Leviton	True Touch	6606-1LM
Lutron	Skylark	S-600, S2-LH

Note: When the installation exceeds 10 fixtures on a single dimmer or distribution lengths exceed 100 feet, please confirm that the end product performs properly. This is caused by a high degree of variability in the triac dimmers.