




UPC Code : 078477683903

Country Of Origin : China



Available Colors :

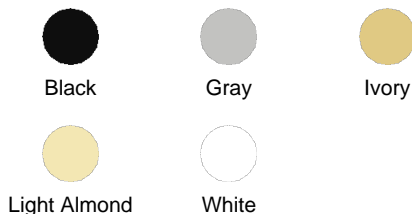

T5632-B

3.6A USB Type-A/Type-A Wall Outlet Charger with 15A Tamper-Resistant Receptacles

Combination Duplex Receptacle/Outlet and USB Charger. 15 Amp, 125 Volt, Decora Tamper-Resistant Receptacle/Outlet, NEMA 5-15R. 3.6 Amps, 5VDC, 2.0 Type A USB Chargers. Grounding, Side Wired & Back Wired - Brown

- SMART - Built-in smart chip recognizes the individual device's charging requirement to optimize the charge
- POWERFUL – Two high-powered charging ports with 3.6A of charging power
- CONVENIENT – No more searching for charging adapters! Upgrade your existing outlets so you can charge up to two USB powered electronics at once, leaving the outlets free for additional power needs
- EASY - Compact design fits in a standard wallbox and works with Decora and Decora Plus screwless wallplates.

Technical Information

Product Features

Amperage : 15 A
Brand : Decora
Grade : Residential/Commercial Specification Grade
Grounding : Grounding
Horsepower Rating : 15A-1/2 HP
NEMA : 5-15R
Product Type : Outlet/USB Combo
Ratings : 15A-125V
Type : Type A/A Duplex Receptacle
Voltage : 125 VAC
Wallplate : Not Included

Electrical Specifications

Amperage : 15 A
Flammability : Rated V-0 per UL 94
Grounding : Grounding
Horsepower Rating : 15A-1/2 HP
Operating Temperature : -10°C to 40°C
Ratings : 15A-125V

Environmental Specifications

Body Material : Thermoplastic
Color : Brown
Cover Material : Thermoplastic
Flammability : Rated V-0 per UL 94
Operating Temperature : -10°C to 40°C
Strap Material : Steel

Material Specifications

Body Material : Thermoplastic
Color : Brown
Cover Material : Thermoplastic
Product ID : Stamped on Strap
Strap Material : Steel
Terminal Accom. : 14-12 AWG
Terminal ID : Brass-Hot Black-Hot White-Neutral Green-Gnd
Termination : Back & Side
Torque Range : 14 – 18 in.-lbs

Mechanical Specifications

Amperage : 15 A
Color : Brown
Grade : Residential/Commercial Specification Grade
Product ID : Stamped on Strap
Terminal Accom. : 14-12 AWG
Terminal ID : Brass-Hot Black-Hot White-Neutral Green-Gnd
Termination : Back & Side
Torque Range : 14 – 18 in.-lbs

Standards and Certifications

FCC Part 15 : Class B
Listed : cCSAus
NOM : 057
UL 1310 : Yes
UL 498 : Yes
Warranty : 2-Year Limited

Features and Benefits

- Perfect for use in residential applications such as kitchens, bedrooms and home offices and in commercial applications such as hotels, airports, restaurants and

- cafes, salons, office cubicles and college dorm rooms
- Smart chip recognizes and optimizes the charging requirements of individual devices
- Tested to withstand over 10,000 insertions.
- Compatible with USB 3.1, 3.0, 2.0, 1.1 devices
- Fits in a standard wallbox, is compatible with standard wallplates and can be multi-ganged with other devices
- Easy to install. Can replace existing outlets
- No data transfer capability
- Compatible with Decora® wallplates and Decora Plus™ screwless wallplates.
Wallplate sold separately

SPECIFICATION SUBMITTAL

JOB NAME: <input style="width: 95%; height: 20px;" type="text"/>	CATALOG NUMBERS: <input style="width: 95%; height: 20px;" type="text"/>
JOB NUMBER: <input style="width: 95%; height: 20px;" type="text"/>	<input style="width: 95%; height: 20px;" type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747
 Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):
 +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
 FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-
 1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2021 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/

