


Compression Splice Reducer

By Burndy
Catalog # Y3129R

350 kcmil CU Long Barrel Size Reduced Down To 250 kcmil Wire Size, Internal Chamfer, Tin Plated, Up to 35kV, RED Color Code, 18 or 324 Die Index.

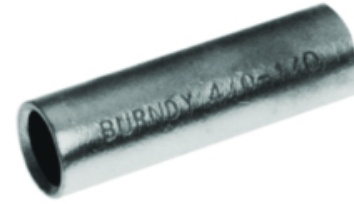

Application

Wire Reducing Splice Adapter Insert

General

Color Code	Red
Connector Type	LONG BARREL
Die Index	18
EU RoHS Indicator	Yes
Feature - Barrel Type	Long
Finish Type	Tin-Plated
Material	COPPER
Plated	Y
Plating Type	Tin Plated
Sub Brand	REDUCER SPLICES
Temperature Rating	194
Type	Y-R
UPC	781810081938
UPC 12 Digit	7818100819388

Dimensions

Dimension - B Length inch	2.00 in
Dimension - L Length Overall mm	51 mm
Dimension - Length Overall inch	2.00 in
Dimension - Outside Diameter inch	0.687 in

Electrical Ratings

Voltage - Maximum	35000
-------------------	-------

Conductor Related

Conductor - Copper Str Run	350 kcmil
Conductor - Copper Str Run Range	350 kcmil
Conductor - Copper Str Size Range	250 kcmil
Conductor - Copper Str Tap	250 KCMIL
Conductor - Copper Str Tap Range	250 kcmil
Conductor - Material	COPPER
Conductor Type	CODE
Wire Size	250 kcmil

Certifications and Compliance

Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Standards - RoHS Compliance Status	CM
UL Listed	No

Logistics

Carton Quantity	100
Minimum Pack Quantity	1
Pallet Quantity	46400

Product Assets

[Catalogs - Full Line BURNDY Catalog](#)
[Customer Notices - Prop 65 Notice](#)
[Sales Drawings - SD..016040-01](#)