

Technical Specifications (continued)

Housing:

Lightweight aluminum housing, steel pan and junction box

Installation:

Standard integral T-bar clips secure the fixture to T-bars and prevent T-system separation

Finish:

Formulated for high durability and long-lasting color

Green Technology:


Mercury and UV free. RoHS-compliant components.

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Dimensions

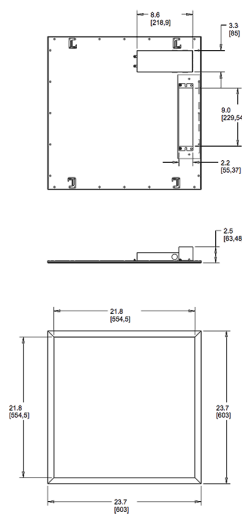

Features

Perfect for shallow plenums

Even and diffuse ambient illumination, ideal for spaces where glare-free lighting is required

0-10V dimmable driver, standard

Ordering Matrix

| Family | Size | Wattage | Color Temp | Dimming (standard) | Control Options | Other Options |
|--------|---------------|----------|-------------------------|----------------------|------------------------------|----------------------|
| EZPAN | 2X2 | 30 | YN | /D10 | | /E2 |
| | 2X4 = 2' x 4' | 17 = 17W | Blank = 5000K Cool | /D10 = 0-10V Dimming | Blank = No Sensor | Blank = None |
| | 2X2 = 2' x 2' | 30 = 30W | N = 4000K Neutral | | /LC = Lightcloud® Controller | /E2 = Battery Backup |
| | 1X4 = 1' x 4' | 40 = 40W | YN = 3500K Warm Neutral | | | |
| | | 50 = 50W | Y = 3000K Warm | | | |