

STAINLESS STEEL COMPRESSION COUPLINGS

Features:

- Manufactured in type 316 stainless steel for increased corrosion resistance
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Designed for use with stainless rigid and IMC
- Addition of stainless and plastic ferrules assures weatherproof seal
- Connectors assembled with ferrules, no separate pieces to purchase or stock
- No package qty. required




Certifications and Compliances:

- Calbrite stainless steel compression connectors are fabricated to meet UL standards
- NEMA 4X approved

Applications:

Used to join two lengths of stainless steel conduit.

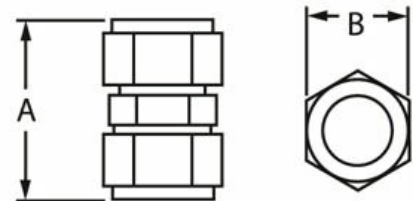

Part Number	Size (in)	Length (in)	O.D. (in)	I.D. (in)	Weight Each Per (lbs)
S60500CC00	½	2.150	1.200	0.850	0.260
S60700CC00	¾	2.430	1.450	1.065	0.420
S61000CC00	1	2.650	1.750	1.330	0.600
S61500CC00	1½	3.000	2.390	1.930	1.060
S62000CC00	2	3.000	3.000	2.440	1.760

All dimensions are for informational purposes only *Tolerances +/- 5%



For more info visit atkore.com/calbrite

