

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	22W
120V	0.20A	Color Temp	2700K/3000K/3500K/4000K/5000K
208V	N/A	Color Accuracy	90 CRI
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	2,000 lm
Input Watts	22W	Efficacy	90.9

## Technical Specifications

### Performance

#### Description:

5CCT Selectable Low-profile, surface-mount Disk for new construction and retrofit applications. Ideal for use in a variety of applications including hallways, bathrooms, stairways, closets, and canopies.

#### Product Type:

Surface & Flush Mounts

#### Input Wattage:

22W

#### Lumens (Nominal):

2000lm

#### Efficacy:

90.9 lm/W

### L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

### Compliance

#### UL Listed:

Suitable for wet locations

#### UL Classified:

Yes

#### ENERGY STAR V2.2:

ENERGY STAR® Version 2.2 Certified

#### Energy Star ID:

2389594

### Electrical

#### Dimming Driver:

TRIAC compatible dimmer with dimming as low as 10%.

#### THD:

≤20%

#### Power Factor:

≥0.9

#### Flicker:

≤30%

## Technical Specifications (continued)

### Electrical

#### Input Voltage:

120V

#### Operating Frequency:

60Hz

### Construction

#### Material:

Plastic

#### Trim Style:

Smooth Trim

#### Base Type:

E26

#### Shape:

Round

#### Mounting:

Surface and recessed mount

#### Operating Temperature:

-20°C (-4°F) to 40°C (104°F)

#### Size:

8"

### LED Characteristics

#### R9 Value:

High color performance with R9 greater than or equal to 50

### Other


#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

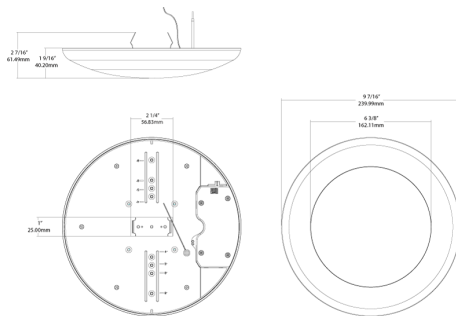

## Features

- Low profile back-lit design made of durable thermoplastic housing with frosted lens
- New construction or retrofit applications
- Installs on standard junction boxes
- Suitable for indoor/outdoor use in dry, damp, and wet locations
- Suitable for use in closets when installed in accordance with NEC guidelines
- Dimmable down to 5% on compatible dimmers, see Dimmer Compatibility List
- 5-Year, limited warranty

## Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Trim
DSK	8	R	22	9FA	120	W	S
	4 = 4" 6 = 6" 8 = 8"	R = Round	7 = 7W 11 = 11W 22 = 22W	9FA = 90 CRI, Field Adjustable CCT	120 = 120V	W = White	S = Smooth

*CCT options vary by product, see individual product spec sheet for more detail*