

PVC COATED CONDUIT BODIES - C FORM 8

Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Fittings are supplied with plastic encapsulated stainless steel screws
- Sizes available are ½" to 4"
- 3½" and 4" in PVC Coated Aluminum Mark 9 only


Applications:

Allied Tube & Conduit® offers the full line of Form 8 PVC Coated Conduit Bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.



Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18
- Verified NEMA 4X Rated
- File # E307133

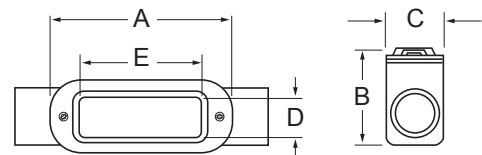

UL Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)	Weight / 100 (lbs)
PV0500C18	½	16	6.69	1.48	1.46	1.00	3.31	200
PV0700C28	¾	21	7.78	1.73	1.27	1.19	3.94	230
PV1000C38	1	27	9.31	1.98	1.83	1.38	4.56	280
PV1200C448	1¼	35	9.94	2.42	2.27	1.75	5.31	450
PV1500C58	1½	41	11.00	2.82	2.83	2.13	6.50	650
PV2000C68	2	53	13.38	3.60	3.83	3.00	8.56	1030
PV2500C78	2½	63	17.63	4.48	5.08	4.25	10.88	1800
PV3000C88	3	78	17.63	4.85	5.08	4.25	10.88	2050
PA3500C989	3½	91	20.75	5.73	6.33	5.44	13.44	1000
PA4000C1089	4	103	20.75	5.73	6.33	5.44	13.44	1200

All dimensions are for informational purposes only *Tolerances +/- 5%

