

T8

10T8/COR/48-850/IF16/G/DIM 10/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.

Product data

General information		Lamp Current (Max)	
Base	G13 [Medium Bi-Pin Fluorescent]	Lamp Current (Min)	260 mA
EU RoHS compliant	Yes	Starting Time (Nom)	100 mA
Nominal Lifetime (Nom)	50000 h	Warm Up Time to 60% Light (Nom)	0.5 s
Switching Cycle	50000X	UL Type	Type A - works on ballast
Light technical		Power Factor (Nom)	0.9
Color Code	850 [CCT of 5000K]	Voltage (Nom)	120-277, 347 V
Beam Angle (Nom)	240 °	Temperature	
Initial lumen (Nom)	1600 lm	T-Ambient (Max)	45 °C
Color Designation	Daylight	T-Ambient (Min)	-20 °C
Correlated Color Temperature (Nom)	5000 K	T-Storage (Max)	65 °C
Luminous Efficacy (rated) (Nom)	160.00 lm/W	T-Storage (Min)	-40 °C
Color Consistency	<5	T-Case Maximum (Nom)	50 °C
Color Rendering Index (Nom)	82	Controls and dimming	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Dimmable	Yes
Operating and electrical		Mechanical and housing	
Input Frequency	25000-105000 Hz	Bulb Material	Glass
Power (Rated) (Nom)	10 W		

Product Length	48 in
Bulb Shape	Tube, double-ended

Approval and application


Energy Saving Product	Yes
Approbation Marks	RoHS compliance UL certificate DLC compliance
Energy Consumption kWh/1000 h	- kWh

Product data

Order product name	10T8/COR/48-850/IF16/G/DIM 10/1
--------------------	---------------------------------

EAN/UPC - Product	046677553241
Order code	553248
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001991834
Net Weight (Piece)	0.230 kg
Model Number	9290019918


Dimensional drawing

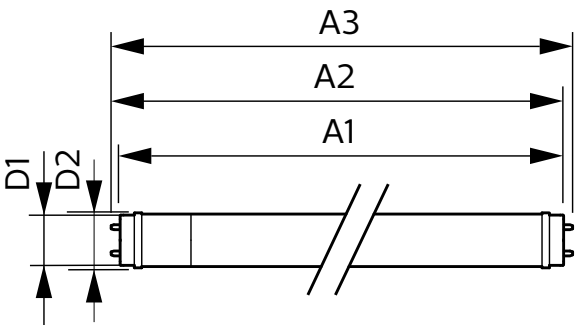

10T8/COR/48-850/IF16/G/DIM 10/1


Product	D1	D2	A1	A2	A3
10T8/COR/48-850/ IF16/G/DIM 10/1	25.7 mm	28 mm	1198.1 mm	1205.2 mm	1212.3 mm

Photometric data




General Uniform Lighting

LEDtube 10W G13 850 ND




LEDtube 10W G13 850 ND

Photometric data

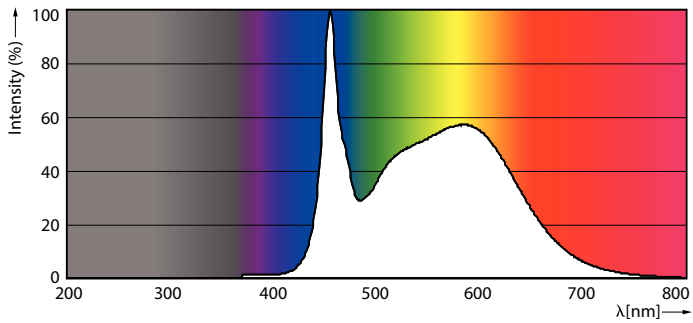


LEDtube 10W G13 850 ND


Lifetime

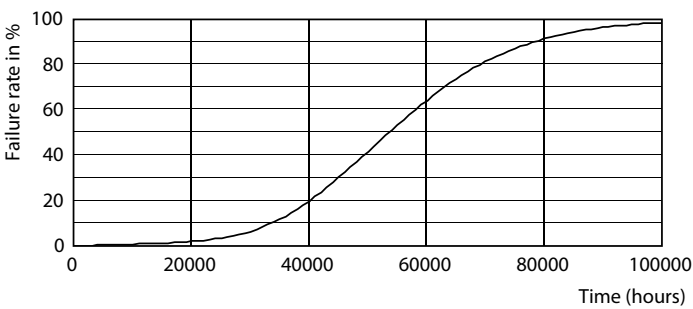


LEDtube 10W G13 850 ND

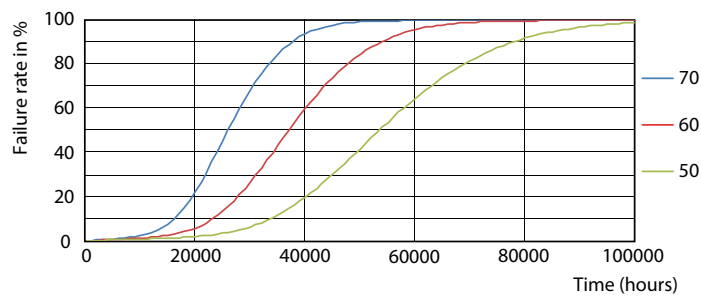

LEDtube 10W G13 850 ND

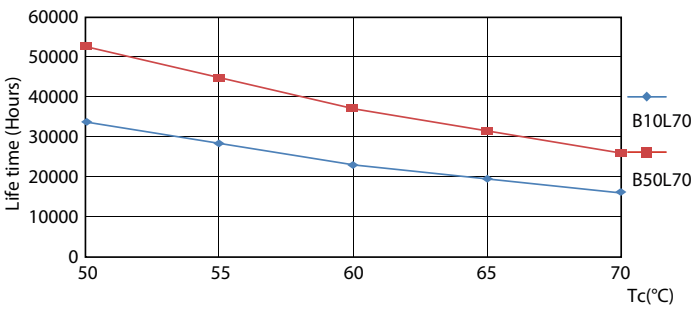


LEDtube 10W G13 850 ND

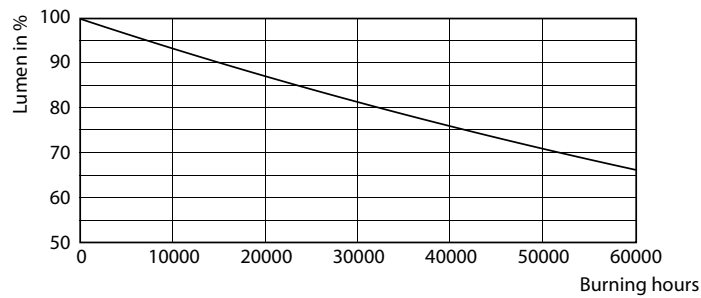

LEDtube 10W G13 850 ND

Lifetime

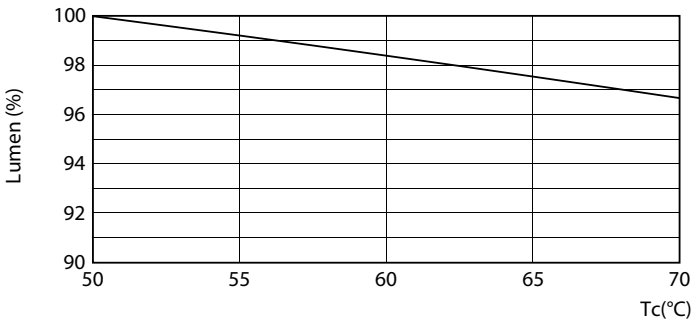

LEDtube 10W G13 850 ND

