

| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|-------------|------------------|----------------|-------------------------------|
| Type | Constant Current | Watts | 18W |
| 120V | 0.17A | Color Temp | 2700K/3000K/3500K/4000K/5000K |
| 208V | N/A | Color Accuracy | 90 CRI |
| 240V | N/A | L70 Lifespan | 50,000 Hours |
| 277V | N/A | Lumens | 1,500 lm |
| Input Watts | 14W | Efficacy | 83.3 |

Technical Specifications

Performance

Description:

The SUMO offers a sleek, low-profile design that adds a modern look to any space. They are easy to install with field adjustable color temperature, affordable, and a stylish options for new construction or retrofit. Mounting kit for recessed housing sold separately.

Product Type:

Surface & Flush Mounts

Input Wattage:

18W

Lumens (Nominal):

1500lm

Efficacy:

83.3 lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Compliance

UL Listed:

Suitable for wet locations

ENERGY STAR V2.2:

ENERGY STAR® Version 2.2 Certified

Energy Star ID:

2389550

Electrical

Dimming Driver:

TRIAC compatible dimmer with dimming as low as 10%.

THD:

≤20%

Power Factor:

≥0.9

Flicker:

≤30%

Input Voltage:

120V

Technical Specifications (continued)

Electrical

Operating Frequency:

60Hz

Construction

Material:

Plastic

Trim Style:

Smooth Trim

Shape:

Round

Mounting:

Surface and recessed mount

Operating Temperature:

-20°C (-4°F) to 40°C (104°F)

Size:

9"

Optical

Beam Angle:

110°

LED Characteristics

R9 Value:

High color performance with R9 greater than or equal to 50

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

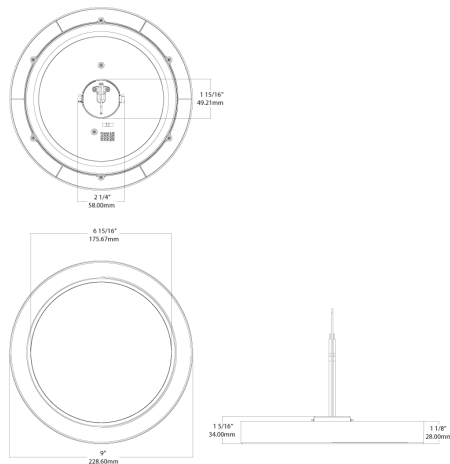

Features

Surface or Recessed mounting options

Select from 5 field-adjustable color temperatures 2700K, 3000K, 3500K, 4000K, or 5000K

Suitable for wet and damp locations

Compatible with triac dimming systems, see Dimmer Compatibility List

Meets California Title 24 requirements

Mounting kit for recessed housing sold separately

Ordering Matrix

| Family | Size | Shape | Wattage | Color Temp | Voltage | Finish |
|--------|------------------------------|-------------------------|--|---|--|-----------|
| SUMOFA | 9 | R | 18 | 9CCT | 120 | W |
| | 5 = 5.5" 7 = 7" 9 = 9" | R = Round S = Square | 10 = 10W 12 = 12W 13 = 13W 14 = 14W 16 = 16W 18 = 18W 22 = 22W | 9CCT = 5000/4000/3500/3000/2700K 95CCT = 5000/4000/3500/3000/2700K | 120 = 120V, Triac Dimming UNV = 120/277V, 0-10V Dimming UNVT = 120/277V, Triac Dimming | W = White |