



T5 Preheat

F6T5/CW PH 25PK

Philips T5 Fluorescent Lamps are incredibly powerful, environmentally responsible, long life lamps with an ultra-slim profile. This translates into reduced maintenance and disposal costs and also allows the use of smaller fixtures—which reduces ceiling clutter.

Warnings and Safety

- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050


Product data

General information		Operating and electrical	
Base	G5 [G5]	Power (Rated) (Nom)	6.0 W
Life To 10% Failures (Nom)	5000 h	Lamp Current (Nom)	0.160 A
Life to 50% Failures (Nom)	10000 h	Voltage (Nom)	42 V
Life to 50% Failures Preheat (Nom)	10000 h		
System Description	na [-]		
Light technical		Controls and dimming	
Color Code	33-640	Dimmable	Yes
Initial lumen (Nom)	260 lm		
Color Designation	Cool White (CW)	Mechanical and housing	
Lumen Maintenance 10000 h (Nom)	58 %	Bulb Shape	T5 [16 mm (T5)]
Lumen Maintenance 2000 h (Nom)	75 %		
Lumen Maintenance 5000 h (Nom)	70 %	Approval and application	
Correlated Color Temperature (Nom)	4100 K	Mercury (Hg) Content (Nom)	4.4 mg
Luminous Efficacy (rated) (Nom)	43 lm/W	Energy Consumption kWh/1000 h	7 kWh
Color Rendering Index (Nom)	60		
Product data			
Order product name	F6T5/CW FAM/25		
EAN/UPC - Product	046677114633		


T5 Preheat

Order code	332411
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928000503321
Net Weight (Piece)	21.000 g

ILCOS Code	FD-6/41/2B-E-G5
------------	-----------------




Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
F6T5/CW FAM/25	16 mm	212.1 mm	219.2 mm	216.8 mm	226.3 mm

F6T5/CW FAM/25

Photometric data

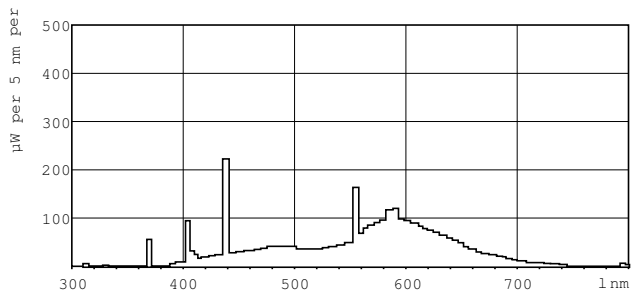

LDPB_TL-MINI_33-640-Spectral power distribution B/W

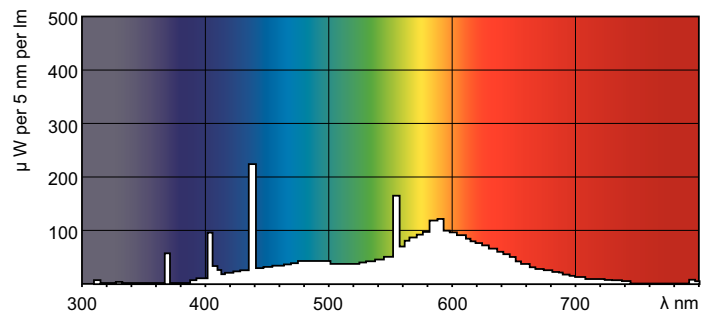

LDPO_TL-MINI_33-640-Spectral power distribution Colour

