



PL-L Long 4-Pin Base

PL-L 18W/835/4P 1CT/25

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

Warnings and Safety

· Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050


Product data

General Information		Lamp Current (Nom)		Voltage (Nom)	
Base	2G11 [2G11]		0.375 A		58 V
Life to 50% Failures (Nom)	15000 h				
Life to 50% Failures Preheat (Nom)	20000 h				
Light Technical		Controls and Dimming			
Color Code	835 [CCT of 3500K]	Dimmable	Yes		
Initial lumen (Nom)	1200 lm	Mechanical and Housing			
Color Designation	White (WH)	Bulb Finish	Silicon		
Lumen Maintenance 10000 h (Nom)	92 %	Cap-Base Information	4P		
Lumen Maintenance 2000 h (Nom)	94 %	Product Data			
Lumen Maintenance 5000 h (Nom)	93 %	Order product name	PL-L 18W/835/4P 1CT/25		
Correlated Color Temperature (Nom)	3500 K	EAN/UPC - Product	046677359324		
Luminous Efficacy (rated) (Nom)	67 lm/W	Order code	359323		
Color Rendering Index (Nom)	82	Numerator - Quantity Per Pack	1		
		Numerator - Packs per outer box	25		
Operating and Electrical		Material Nr. (12NC)	927903183521		
Power (Rated) (Nom)	18.0 W	Net Weight (Piece)	60.900 g		

PL-L Long 4-Pin Base

ILCOS Code FSD-18/35/1B-E-2G11


Dimensional drawing




Product	D (max)	D1 (max)	C (max)
PL-L 18W/835/4P	39.0 mm	18.0 mm	226.6 mm

PL-L 18W/835/4P Silicon

Photometric data

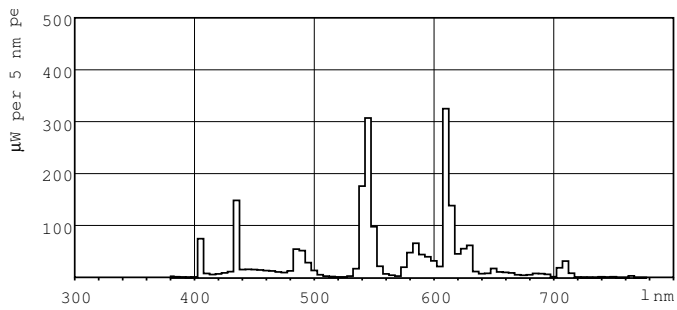

LDPB_PLLSIL_835-Spectral power distribution B/W

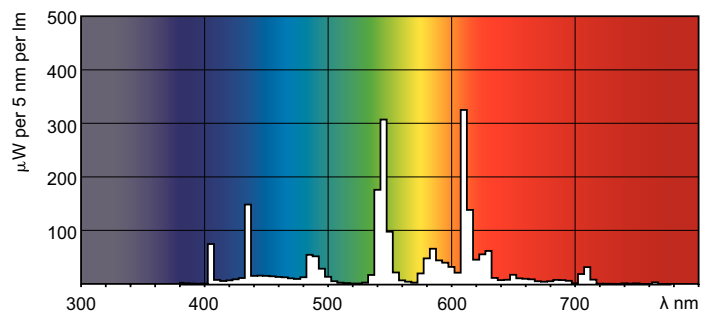

LDPO_PLLSIL_835-Spectral power distribution Colour

