



# PL-T Triple 4-Pin Base

## PL-T 26W/830/A/4P 1CT/5X10BOX ALTO

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

### Warnings and Safety

- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

### Product data

| General information      |                    |
|--------------------------|--------------------|
| Base                     | GX24Q-3 [ GX24q-3] |
| LSF Preheat 2000 h Rated | 99 %               |
| LSF Preheat 4000 h Rated | 98 %               |
| LSF Preheat 6000 h Rated | 97 %               |
| LSF Preheat 8000 h Rated | 90 %               |

| Light technical                    |                     |
|------------------------------------|---------------------|
| Color Code                         | 830 [ CCT of 3000K] |
| Initial lumen (Nom)                | 1750 lm             |
| Luminous Flux (Rated) (Nom)        | 1750 lm             |
| Color Designation                  | Warm White (WW)     |
| Correlated Color Temperature (Nom) | 3000 K              |
| Luminous Efficacy (rated) (Nom)    | 64.8 lm/W           |

|                             |      |
|-----------------------------|------|
| Color Rendering Index (Nom) | >80  |
| LLMF 2000 h Rated           | 92 % |
| LLMF 4000 h Rated           | 88 % |
| LLMF 6000 h Rated           | 85 % |
| LLMF 8000 h Rated           | 84 % |
| LLMF 12000 h Rated          | 81 % |


| Operating and electrical |         |
|--------------------------|---------|
| Power (Rated) (Nom)      | 26 W    |
| Lamp Current (Nom)       | 0.335 A |

| Temperature              |       |
|--------------------------|-------|
| Design Temperature (Nom) | 28 °C |


PL-T Triple 4-Pin Base

|                            |                                    |
|----------------------------|------------------------------------|
| Controls and dimming       |                                    |
| Dimmable                   | Yes                                |
| Mechanical and housing     |                                    |
| Cap-Base Information       | 4P                                 |
| Approval and application   |                                    |
| Mercury (Hg) Content (Nom) | 1.4 mg                             |
| Product data               |                                    |
| Order product name         | PL-T 26W/830/A/4P 1CT/5X10BOX ALTO |

|                                 |                        |
|---------------------------------|------------------------|
| EAN/UPC - Product               | 046677268237           |
| Order code                      | 458257                 |
| Numerator - Quantity Per Pack   | 1                      |
| Numerator - Packs per outer box | 10                     |
| Material Nr. (12NC)             | 927910983050           |
| Net Weight (Piece)              | 64.000 g               |
| ILCOS Code                      | FSM-26/30/1B-E-GX24q=3 |



Dimensional drawing




PL-T 26W/830/A/4P/ALTO

| Product                | D (max) | A (max) | B (max)  | C (max)  |
|------------------------|---------|---------|----------|----------|
| PL-T 26W/830/A/4P/ALTO | 41 mm   | 86.7 mm | 111.0 mm | 126.7 mm |

Photometric data

Φ 500


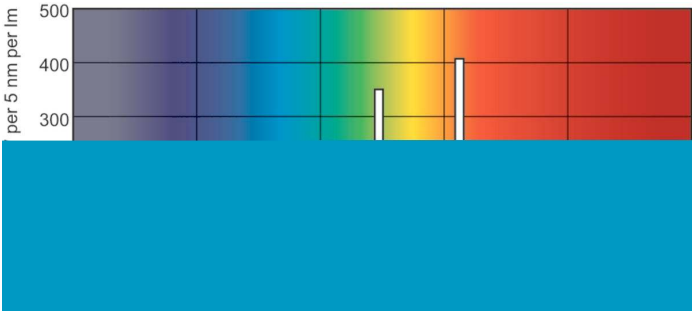


LDPB\_PLTTOP4P\_830-Spectral power distribution B/W

LDPO\_PLTTOP4P\_830-Spectral power distribution Colour


PL-T Triple 4-Pin Base

Lifetime

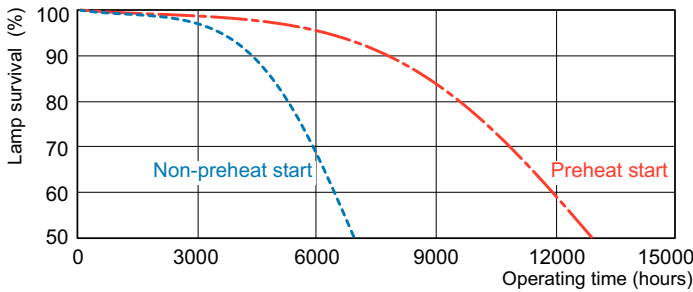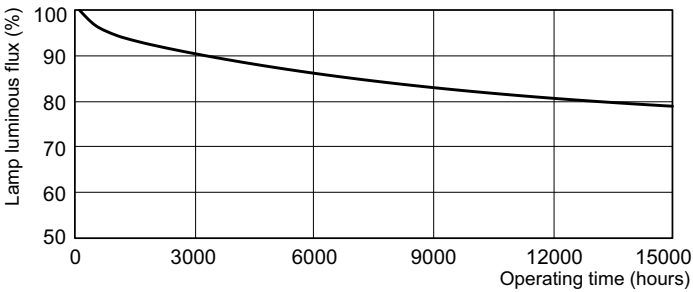

LDLM\_PLTTOP4P\_0001-Lumen maintenance diagram

LDLE\_PLTTOP4P\_0001-Life expectancy diagram

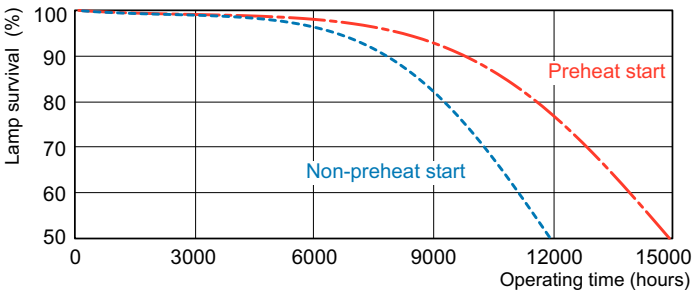

LDLE\_PLTTOP4P\_0002-Life expectancy diagram

