


LA2KT2U

Electronic time delay auxiliary contact block,
TeSys K, 1C/O, on delay 1-30s, front, control
110-240 V AC

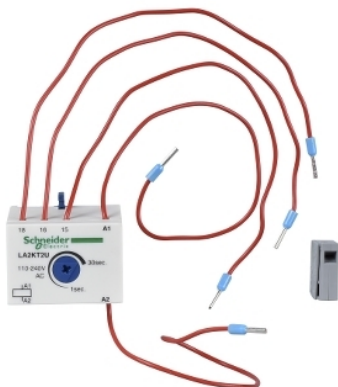

Main

| | |
|--|---|
| Range | TeSys |
| Product name | TeSys K |
| Product or Component Type | Time delay auxiliary contact block |
| Device short name | LA1 |
| Range compatibility | TeSys K LC1K TeSys K CA2K TeSys K CA3K TeSys K CA4K |
| Mounting Location | Front |
| Pole contact composition | 1 C/O |
| Contacts operation | Time delay |
| Timer type | On delay |
| Time delay range | 1...30 s |
| [Ue] rated operational voltage | 110...240 V AC control circuit 240 V AC signalling circuit |
| Rated operational voltage limits | 0.85...1.1 U _c |
| [I _{th}] conventional free air thermal current | 2 A signalling circuit |
| Standards | EN/IEC 60947-5-1 UL 60947-5-1 CSA C22.2 No 60947-5-1 |

Complementary

| | |
|-------------------------|---|
| Reset time | 1.5 S during time delay 0.5 s after time delay |
| Insulation resistance | > 10 MOhm |
| Connections - terminals | Slip-on terminals |
| Height | 1.06 in (27 mm) |
| Width | 1.50 in (38 mm) |
| Depth | 1.50 in (38 mm) |
| Net Weight | 0.09 lb(US) (0.04 kg) |

Environment

| | |
|---------------------------------------|------------------------------|
| Environmental characteristic | Normal environment |
| IP degree of protection | IP20 conforming to IEC 60529 |
| Protective treatment | TC IEC 60068 |
| Ambient Air Temperature for Operation | 14...140 °F (-10...60 °C) |

Ordering and shipping details

| | |
|-----------------------|-------------------------------|
| Category | 22341-CONTACTOR,D,K,&F ACCESS |
| Discount Schedule | I12 |
| GTIN | 3389110230086 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 1.51 oz (42.9 g) |
| Returnability | Yes |
| Country of origin | TN |

Packing Units

| | |
|------------------------------|------------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 1.97 in (5 cm) |
| Package 1 width | 1.89 in (4.8 cm) |
| Package 1 Length | 1.89 in (4.8 cm) |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 70 |
| Package 2 Weight | 7.41 lb(US) (3.361 kg) |
| Package 2 Height | 5.91 in (15 cm) |
| Package 2 width | 11.81 in (30 cm) |
| Package 2 Length | 15.75 in (40 cm) |

Offer Sustainability

| | |
|----------------------------|--|
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|