

# RUMF32F7

Harmony, Universal plug-in relay, 10 A, 3 CO, with LED, with lockable test button, flat (faston) terminals, 120 V AC



## Main

|   |                                  |
|---|----------------------------------|
| Range of Product                            | Harmony Electromechanical Relays |
| Series name                                 | Universal                        |
| Product or Component Type                   | Plug-in relay                    |
| Device short name                           | RUM                              |
| Contacts type and composition               | 3 C/O                            |
| [Uc] control circuit voltage                | 120 V AC 50/60 Hz                |
| [the] conventional enclosed thermal current | 10 A -40...131 °F (-40...55 °C)  |
| Status LED                                  | With                             |
| Control Type                                | Lockable test button             |
| Utilisation coefficient                     | 20 %                             |

## Complementary

|  |  |
|--|--|
| Shape of pin                           | Flat   |
| [Ui] rated insulation voltage          | 250 V IEC<br>300 V CSA<br>300 V UL   |
| [Uimp] rated impulse withstand voltage | 4 kV 1.2/50 µs)  |
| Contacts material                      | AgNi   |
| [Ie] rated operational current         | 10 A at 277 V AC conforming to UL<br>10 A at 30 V DC conforming to UL<br>10 A at 277 V AC (same polarity) conforming to CSA<br>10 A at 30 V DC conforming to CSA<br>5 A at 250 V AC (NC) conforming to IEC<br>5 A at 28 V DC (NC) conforming to IEC<br>10 A at 250 V AC (NO) conforming to IEC<br>10 A at 28 V DC (NO) conforming to IEC |
| Maximum switching voltage              | 250 V IEC  |
| Resistive rated load                   | 10 A 250 V AC<br>10 A 28 V DC  |
| Maximum switching capacity             | 2500 VA/280 W  |
| Minimum switching capacity             | 170 mW 10 mA, 17 V   |
| Operating rate                         | <= 18000 cycles/hour no-load<br><= 1200 cycles/hour under load   |
| Mechanical durability                  | 5000000 cycles   |
| Electrical durability                  | 100000 cycles resistive  |
| Average coil consumption in VA         | 3 60 Hz  |
| Drop-out voltage threshold             | >= 0.15 U <sub>c</sub> AC  |
| Operate time                           | 20 ms at nominal voltage   |
| Release time                           | 20 ms at nominal voltage   |
| Average coil resistance                | 1700 Ohm 20 °C +/- 15 %  |
| Rated operational voltage limits       | 96...132 V AC  |
| Protection category                    | RT I   |
| Test levels                            | Level A  |
| Safety reliability data                | B10d = 100000  |
| Operating position                     | Any position   |

|                     |                        |
|---------------------|------------------------|
| Net Weight          | 0.19 lb(US) (0.086 kg) |
| Device presentation | Complete product       |

## Environment

|                                       |   |
|---------------------------------------|---|
| Dielectric strength                   | 1500 V AC between contacts with micro disconnection<br>2500 V AC between coil and contact with reinforced<br>2000 V AC between poles with basic |
| Product Certifications                | CSA<br>UL<br>EAC  |
| Standards                             | CSA C22.2 No 14<br>UL 508<br>EN/IEC 61810-1   |
| Ambient Air Temperature for Storage   | -40...185 °F (-40...85 °C)  |
| Ambient air temperature for operation | -40...131 °F (-40...55 °C)  |
| Vibration resistance                  | 3 gn +/- 1 mm 10...150 Hz)5 cycles in operation<br>4 gn +/- 1 mm 10...150 Hz)5 cycles not operating   |
| IP degree of protection               | IP40  |
| Shock resistance                      | 10 gn 11 ms) in operation EN/IEC 60068-2-27<br>10 gn 11 ms) not operating EN/IEC 60068-2-27   |
| Pollution degree                      | 3   |

## Ordering and shipping details

|                       |                             |
|-----------------------|-----------------------------|
| Category              | 21127-ZELIO ICE CUBE RELAYS |
| Discount Schedule     | CP2                         |
| GTIN                  | 3606480627484               |
| Nbr. of units in pkg. | 1                           |
| Package weight(Lbs)   | 3.00 oz (85.0 g)            |
| Returnability         | Yes                         |
| Country of origin     | CN                          |


## Packing Units

|                        |                  |
|------------------------|------------------|
| Unit Type of Package 1 | PCE              |
| Package 1 Height       | 1.42 in (3.6 cm) |
| Package 1 width        | 1.38 in (3.5 cm) |
| Package 1 Length       | 2.72 in (6.9 cm) |


## Offer Sustainability

|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product  |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>  |
| REACH free of SVHC         | Yes  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>   |
| Toxic heavy metal free     | Yes  |
| Mercury free               | Yes  |
| RoHS exemption information | <a href="#">Yes</a>  |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>   |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>  |


Dimensions

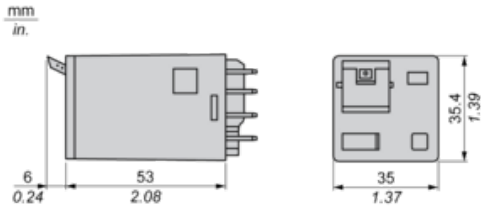

## Wiring Diagram



## Wiring Diagram




Symbols shown in blue correspond to Nema marking.

Electrical Durability of Contacts

Durability (inductive load) = durability (resistive load) x reduction coefficient.


Resistive AC load

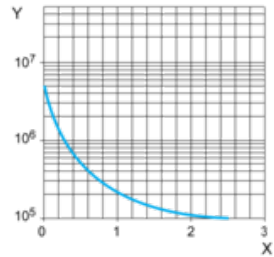

X Switching capacity (kVA)


Y Durability (Number of operating cycles)

Reduction coefficient for inductive AC load (depending on power factor cos φ)

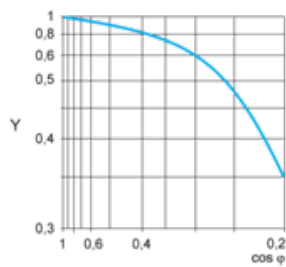

Y Reduction coefficient (A)

Maximum switching capacity on resistive DC load

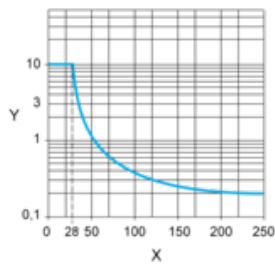

X Voltage DC

Y Current DC

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.