


Product data sheet

Characteristics

8911DPSO23V09

Starter, Definite Purpose, nonreversing, 25A, 3 pole, 3 phase, 208 to 240VAC coil, melting alloy overload, open style

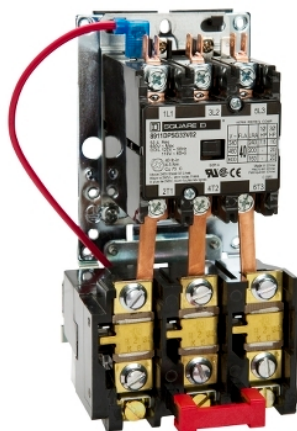

Main

| | |
|-------------------------|---|
| Product | Definite Purpose Starter |
| Ampere Rating | 25 A |
| Horsepower Rating | 2 Hp 115 V AC, 1 phase 5 Hp 230 V AC, 1 phase 10 Hp 230 V AC, 3 phase 15 Hp 460 V AC, 3 phase 20 hp 575 V AC, 3 phase |
| Maximum Voltage Rating | 600 V AC |
| Control Circuit Voltage | 220 V AC 50 Hz 208...240 V AC 60 Hz |
| Phase | 3 phase |

Complementary

| | |
|-------------------------|--|
| Enclosure Rating | Not rated (open device) |
| Locked Rotor Amperes | 150 A 230 V AC 125 A 460 V AC 100 A 575 V AC |
| Number of Poles | 3P |
| Range | DPS |
| Overload Type | Melting alloy |
| Number of Thermal Units | 3 |

Ordering and shipping details

| | |
|-----------------------|------------------------|
| Category | 21381-8911 DP |
| Discount Schedule | CP1 |
| GTIN | 785901342793 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 2.29 lb(US) (1.039 kg) |
| Returnability | Yes |
| Country of origin | CN |

Packing Units

| | |
|------------------------|---------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 4.80 in (12.192 cm) |
| Package 1 width | 4.80 in (12.192 cm) |
| Package 1 Length | 8.00 in (20.32 cm) |

Offer Sustainability

| | |
|----------------------------|---|
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |

Contractual warranty

Warranty

18 months
