


# Product data sheet

## Characteristics

# 8911DPSO33V09

Starter, Definite Purpose, nonreversing, 30A, 3 pole, 3 phase, 208 to 240 VAC coil, melting alloy overload, open style

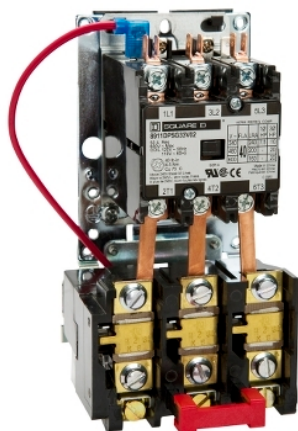

### Main

Product	Definite Purpose Starter
Ampere Rating	30 A
Horsepower Rating	2 Hp 115 V AC, 1 phase 5 Hp 230 V AC, 1 phase 10 Hp 230 V AC, 3 phase 15 Hp 460 V AC, 3 phase 20 hp 575 V AC, 3 phase
Maximum Voltage Rating	600 V AC
Control Circuit Voltage	220 V AC 50 Hz 208...240 V AC 60 Hz
Phase	3 phase

### Complementary

Enclosure Rating	Not rated (open device)
Locked Rotor Amperes	180 A 230 V AC 150 A 460 V AC 120 A 575 V AC
Number of Poles	3P
Range	DPS
Overload Type	Melting alloy
Number of Thermal Units	3

### Ordering and shipping details

Category	21381-8911 DP
Discount Schedule	CP1
GTIN	785901748939
Nbr. of units in pkg.	1
Package weight(Lbs)	2.30 lb(US) (1.043 kg)
Returnability	Yes
Country of origin	CN

### Packing Units

Unit Type of Package 1	PCE
Package 1 Height	5.00 in (12.7 cm)
Package 1 width	4.70 in (11.938 cm)
Package 1 Length	7.90 in (20.066 cm)

### Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

## Contractual warranty

---

Warranty

18 months

---