

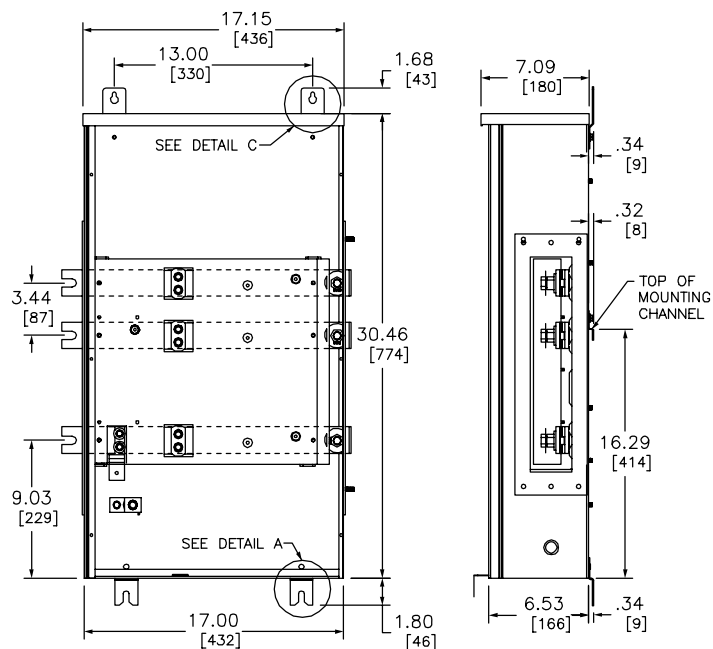



DETAIL A
BOTTOM
MOUNTING
BRACKET



DETAIL B
COVER
SEALING
LATCH

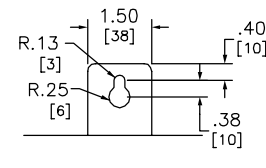

DETAIL C
TOP
MOUNTING
BRACKET

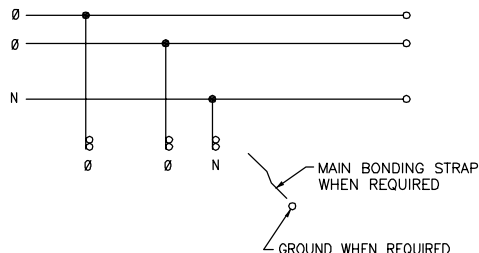

SYMBOL	KNOCKOUTS	
	CONDUIT SIZE	
	IN	MM
A	.50	13
B	.75	19
D	1.25	32
E	1.50	38
F	2.00	51
G	2.50	64
H	3.00	76
I	3.50	89
J	4.00	102

ALTERNATE LUGS **

LUG MANUFACTURER	CATALOG NUMBER	WIRE RANGE AWG/kcmil
ILSCO	TA-600-2N	(1) #2-600 AL/CU
ILSCO	TA-800-2N	(1) 300-800 AL/CU
CMC	A1B2-600-2	(1) #2-600 AL/CU
CMC	L1D2-800	(1) 300-800 AL/CU
ANDERSON	L1D2-600	(1) #2-600 AL/CU
ANDERSON	L1D2-800	(1) 300-800 AL/CU
ANDERSON	VCCL-050-12H2	(1) #2-500 AL/CU
ANDERSON	VCCL-060-12H2	(1) 400-600 AL OR (1) 400-500 CU
ANDERSON	VCCL-075-12BN	(1) 500-750 AL OR (1) 500 CU
ANDERSON	VACL-600-12BN	(1) 350-600 AL OR (1) 350-500 CU
ANDERSON	VHCL-500-12BN	(1) #4/0-500 AL/CU
ANDERSON	VHCL-600-12BN	(1) 250-600 AL/CU

** ALTERNATE LUGS REQUIRES USE OF LUG LANDING KIT PART NUMBER EZMSK2 (ORDER SEPARATELY).

SYSTEM TYPE	MAIN RATING (AMPERES)	CATALOG NUMBER *	BUS BAR MATERIAL	LINE PHASE AND NEUTRAL LUG WIRE RANGE FOR AL OR CU CONDUCTORS (FACTORY INSTALLED)	GROUND LUG WIRE RANGE (FACTORY INSTALLED)
1Ø 3W 120/240VAC	400	EZM1400TB EZM1400TCU	ALUMINUM COPPER	(2) 3/0-500	(1) #6-300

*SERIES M04

NOTES:
FINISH - GRAY BAKED ENAMEL POWDER COAT PAINT OVER CLEANED GALVANNEALED STEEL.
UL LISTED - FILE-10582, VOL. M, E131840, VOL. M.
SUITABLE FOR USE ON THE LINE SIDE OF SERVICE EQUIPMENT.
MAIN HORIZONTAL CROSS BUS RATED AT 800 AMPERES.
MAIN DEVICES ARE SEALABLE BY UTILITY.
GANGABLE MULTI-METERING EQUIPMENT IS DESIGNED FOR WALL MOUNTING ONLY.
(NOT SUITABLE FOR FLOOR STANDING EQUIPMENT).

DUAL DIMENSIONS: INCHES
MILLIMETERS

EZ METER-PAK GANGABLE
MULTI-METERING EQUIPMENT
400A 1PH 3W MAIN LUGS TERMINAL BOXES
OVERHEAD/UNDERGROUND FEED
RAINPROOF NEMA TYPE 3R ENCLOSURE



DWG# 3367
NO.