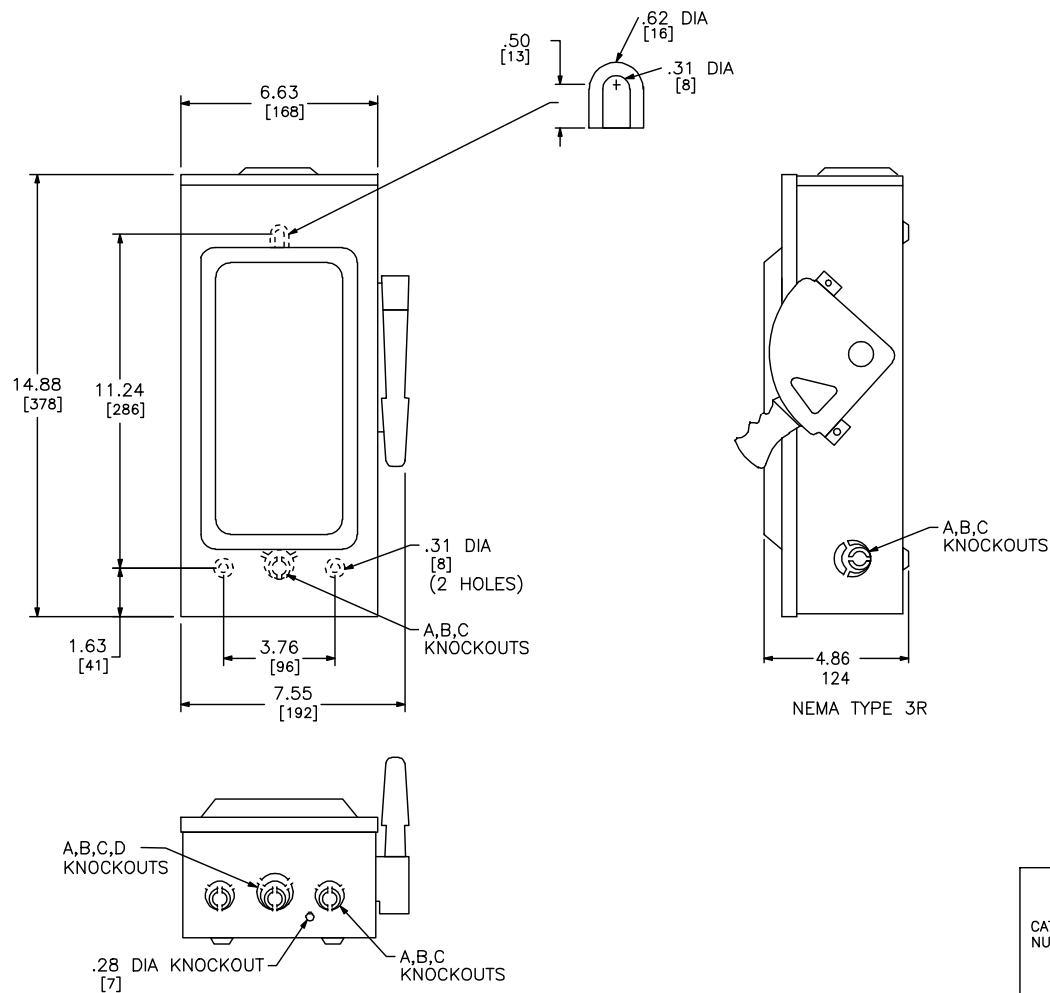


TERMINAL LUGS			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
60	#3 AWG	#14 AWG	CU
60	#3 AWG	#12 AWG	AL

KNOCKOUTS				
SYMBOL	CONDUIT SIZE		DIAMETER	
	IN	MM	IN	MM
A	.50	13	.88	22
B	.75	19	1.13	29
C	1.00	25	1.38	35
D	1.25	32	1.75	44

NOTES:

UL LISTED - E2875

FINISH - GRAY BAKED ENAMEL

ALL NEUTRALS - INSULATED GROUNDABLE

WHEN MOUNTING THESE SWITCHES, ALLOW 3.00 IN / 76 MM MIN. CLEARANCE BETWEEN ENCLOSURES FOR OPENING OF SIDE HINGED DOOR.

▲ USE BOTH OUTER SWITCHING POLES

● IF CORNER GROUNDED DELTA, INSTALL NEUTRAL AND USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.

CATALOG NUMBER		VOLTAGE RATINGS	AMPERAGE RATINGS	WIRING DIAG.	HORSEPOWER RATINGS					
					240VAC				250 VDC	
					STD.		MAX.		STD.	MAX.
					1PH	3PH	1PH	3PH		
H222NRB	240VAC:250VDC	60	A	3 ▲	7 1/2 ●	10 ▲	15 ●	10 ▲	-	-
H322NRB	240VAC:250VDC	60	B	3 ▲	7 1/2 ●	10 ▲	15 ●	10 ▲	-	-

HEAVY DUTY SAFETY SWITCHES
VISIBLE BLADE TYPE
60 AMPERE
ENCLOSURE - NEMA TYPE 3R



DWG# 3003
NO.