




KEYSLOT MOUNTING HOLES
(4) .44/.88 DIA
[11]/[22]

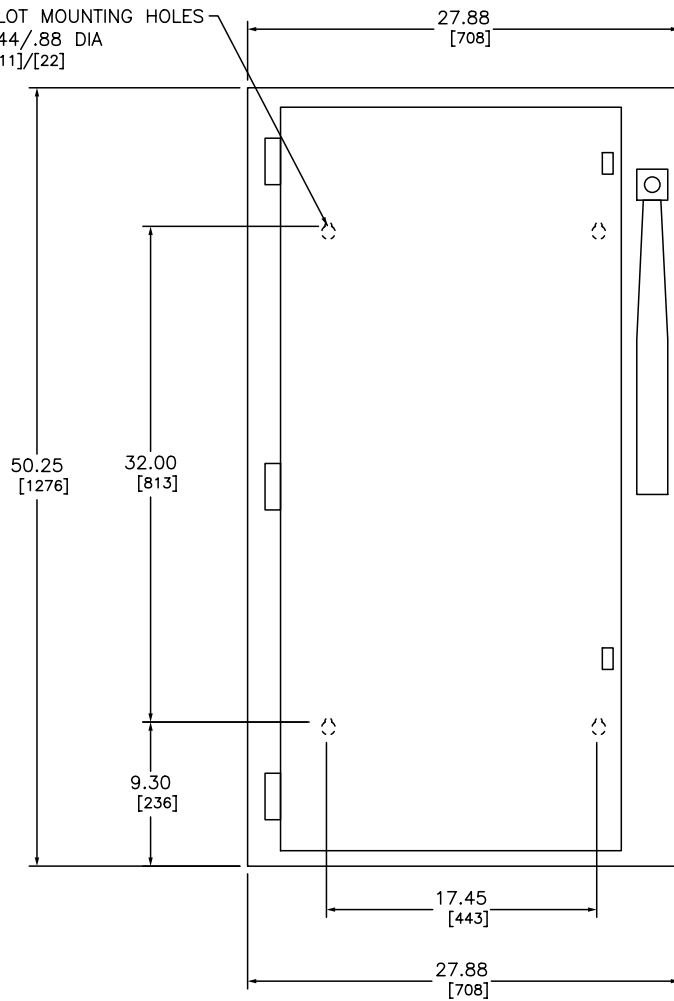

NEMA TYPE 1
NO KNOCKOUTS

NOTES:
FINISH - GRAY BAKED ENAMEL
UL LISTED - FILE E-154828
ALL NEUTRALS - INSULATED GROUNDABLE
SUITABLE FOR USE AS SERVICE EQUIPMENT
SHORT CIRCUIT CURRENT RATINGS:

10,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS H OR K FUSES.
200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS R FUSES HAVING
CLASS R REJECTION KITS INSTALLED OR CLASS J FUSES.

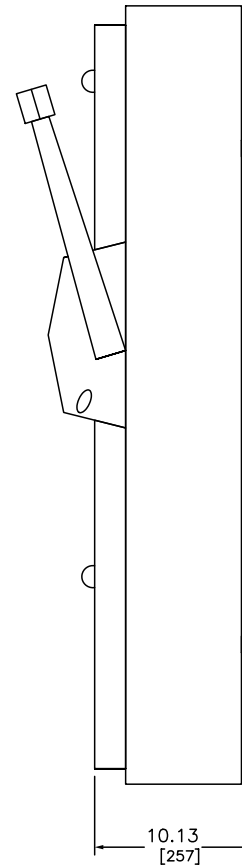

TERMINAL LUGS DATA			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
400	(1) 750 KCMIL OR	(1) #1/0 AWG OR	AL OR CU
	(2) 300 KCMIL	(2) #1/0 AWG	

DUAL DIMENSIONS: INCHES
MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG.	HORSEPOWER RATINGS		
			240VAC		250 VDC
			STD.	MAX.	
H325	240VAC;250VDC	A	50	125	50
H325N	240VAC;250VDC	B	50	125	50

HEAVY DUTY SAFETY SWITCHES
VISIBLE BLADE TYPE
400 AMPERE
ENCLOSURE - NEMA TYPE 1 GENERAL PURPOSE



DWG# 1923
NO.