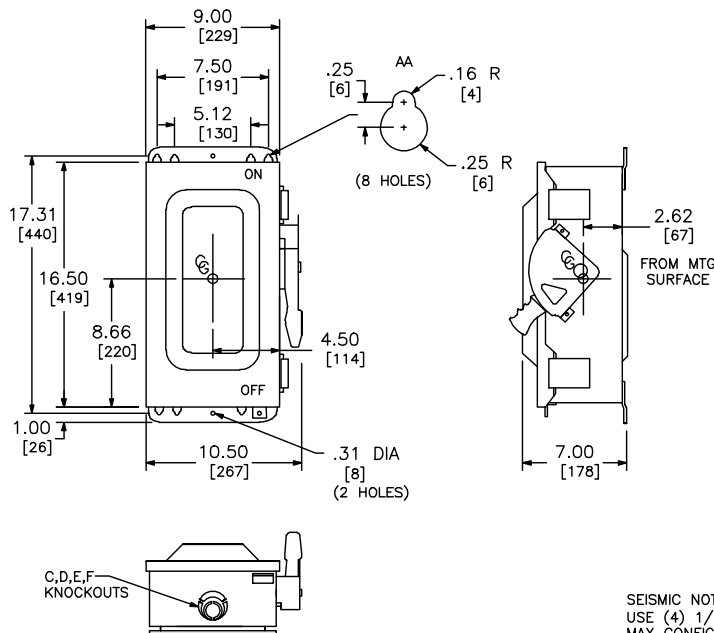


TERMINAL LUGS			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
60	# 4 AWG	# 14 AWG	CU

KNOCKOUTS				
SYMBOL	C	D	E	F
CONDUIT SIZE	1	1.25	1.50	2

SEISMIC NOTES:
 USE (4) 1/4" DIA GRADE 5 STEEL MOUNTING BOLTS @ HOLES AA
 MAX CONFIGURED WEIGHT 18 LB FOR THE PURPOSE OF DETERMINING
 SEISMIC ANCHORAGE REQUIREMENTS. FOR ALL OTHER APPLICATIONS,
 CONTACT SQUARE D COMPANY.

DUAL DIMENSIONS: INCHES
 MILLIMETERS

CATALOG NUMBERS				VOLTAGE RATINGS	AMPERE RATING	WIRING DIAG.	HORSEPOWER RATINGS														
NEMA TYPE 12K	NEMA TYPE 12	NEMA TYPE 12K	NEMA TYPE 12				240VAC				480VAC				600VAC			250 VDC		600 VDC	
WITH KNOCKOUTS	WITHOUT KNOCKOUTS	VIEWING WINDOW WITH KNOCKOUTS	VIEWING WINDOW WITHOUT KNOCKOUTS				STD.		MAX.		STD.		MAX.		STD.	MAX.					
							1Ø	3Ø	1Ø	3Ø	1Ø	3Ø	1Ø	3Ø	3Ø	1Ø	3Ø	STD.	MAX.	STD.	MAX.
H361—2A H362A HU362A	H361—2AWK H362AWK HU362AWK	---- H362AVW HU362AVW	---- H362AWKW HU362AWKW	600VAC;600VDC 600VAC;600VDC 600VAC;600VDC	30 60 60	B B C	— — —	— — —	— — 10▲	— — 20 *	— 5 ▲ 15	— 15 ● 25▲	— 15 30 ●	7 1/2 15 50 *	— 15 30▲	20 50 60	— — —	— — 10▲	10▲ 25▲ —	15▲ 30▲ 30▲	

NOTES:
 FINISH — GRAY BAKED ENAMEL.
 UL LISTED — FILE E-2875
 ALL NEUTRALS — INSULATED GROUNDABLE
 SUITABLE FOR USE AS SERVICE EQUIPMENT
 SHORT CIRCUIT CURRENT RATINGS:
 10,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS H OR K FUSES
 200,000 AMPERES WHEN USED WITH OR PROTECTED BY CLASS R OR J FUSES.
 WHEN MOUNTING THESE SWITCHES, ALLOW 4.00/[102] MIN. CLEARANCE
 BETWEEN ENCLOSURES FOR OPENING OF SIDE HINGED DOOR.
 * NOT APPLICABLE FOR CORNER GROUNDED DELTA.
 ▲ USE BOTH OUTER SWITCHING POLES.
 ● IF CORNER GROUNDED DELTA, INSTALL NEUTRAL AND USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.

HEAVY DUTY SAFETY SWITCHES — SEISMIC
 VISIBLE BLADE TYPE
 30-60 AMPERE — SERIES F5
 ENCLOSURE — NEMA TYPE 12



DWG# 1896S
 NO.