



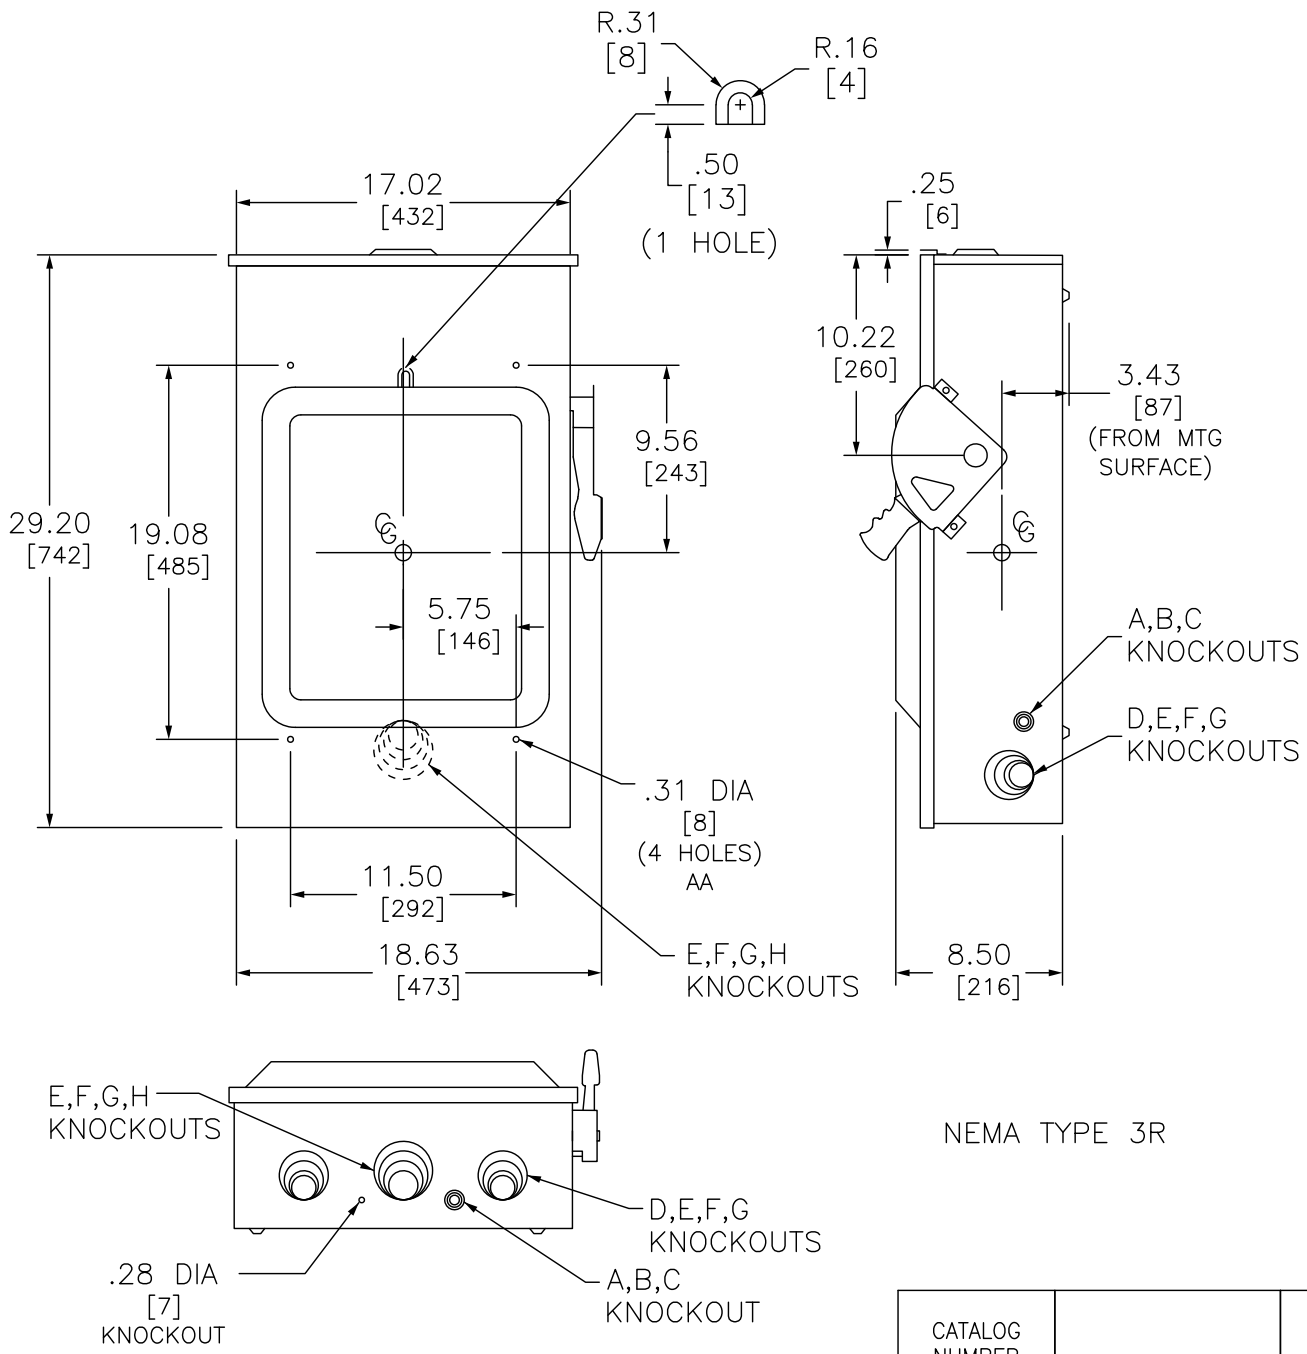

SEISMIC NOTES:
USE (4) 1/4" DIA GRADE 5 STEEL MOUNTING BOLTS @ HOLES (*) AA
MAX CONFIGURED WEIGHT 55 LB FOR THE PURPOSE OF DETERMINING
SEISMIC ANCHORAGE REQUIREMENTS. FOR ALL OTHER APPLICATIONS,
CONTACT SCHNEIDER ELECTRIC.
*TOP TWO HOLES MUST BE DRILLED IN FIELD

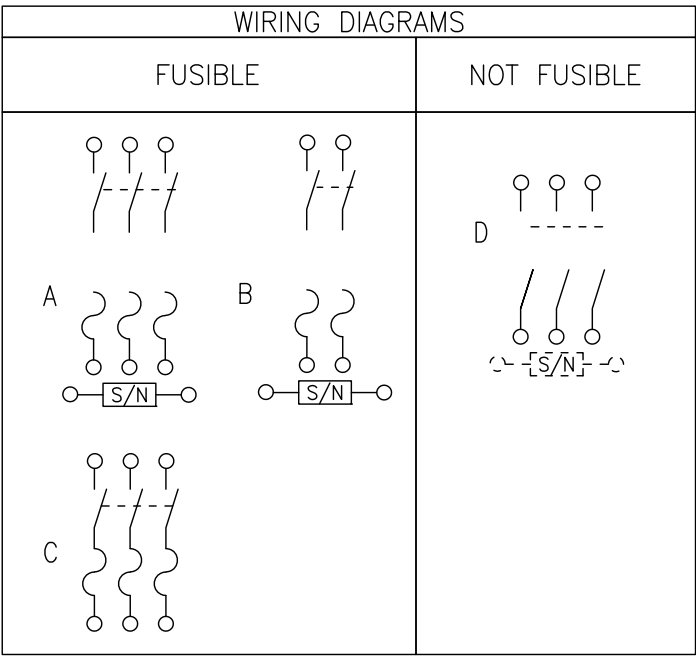

TERMINAL LUGS ‡			
AMPERES	MAX WIRE	MIN WIRE	TYPE
200	250 KCML	#6 AWG	AL OR CU

KNOCKOUTS				
SYMBOL	CONDUIT SIZE		DIAMETER	
	IN	MM	IN	MM
A	.50	13	.88	22
B	.75	19	1.13	29
C	1.00	25	1.38	35
D	1.25	32	1.75	45
E	1.50	38	2.00	51
F	2.00	51	2.50	64
G	2.50	64	3.00	76
H	3.00	76	3.50	89

NOTES:
FINISH — GRAY BAKED ENAMEL
UL LISTED — FILE E-2875
ALL NEUTRALS — INSULATED GROUNDABLE
SUITABLE FOR USE AS SERVICE EQUIPMENT
SHORT CIRCUIT CURRENT RATINGS:
10,000 AMPERES WITH CLASS H OR K FUSES.
200,000 AMPERES WITH CLASS R FUSES HAVING CLASS R REJECTION
KITS INSTALLED OR CLASS J FUSES.
ON 600V SWITCHES, 100,000 AMPERE MAX ON CORNER GROUNDED DELTA
WHEN PROTECTED BY CLASS R OR J FUSES.
WHEN MOUNTING THESE SWITCHES, ALLOW 4.00/[102] MIN CLEARANCE BETWEEN
ENCLOSURES FOR OPENING OF SIDE HINGED DOOR.
▲ TOP OF NEMA TYPE 3R DEVICES HAVE PROVISIONS FOR MAXIMUM 2.50/[64] BOLT-ON HUB.
‡ LUGS SUITABLE FOR 75°C CONDUCTORS.
IF CORNER GROUNDED DELTA, USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.
& IF CORNER GROUNDED DELTA, INSTALL NEUTRAL AND USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.
^ USE ANY TWO SWITCHING POLES.
< MAX RATING.

CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG	HORSEPOWER RATINGS													
			240VAC				480VAC				600VAC				250 VDC	600 VDC
STD			MAX		STD		MAX		STD		MAX		STD	STD		
1 Ø			3 Ø	1 Ø	3 Ø	1 Ø	3 Ø	1 Ø	3 Ø	1 Ø	3 Ø	1 Ø	3 Ø			
H224NRB	240VAC;250VDC	B	15	25#	–	60#	–	–	–	–	–	–	–	–	40	–
H324NRB	240VAC;250VDC	A	15^	25#	–	60#	–	–	–	–	–	–	–	–	40	–
H364RB	600VAC;600VDC	C	15^	25#	–	60&	25^	50&	50^	125&	30^	60	50^	150	40^	50^
H364NRB	600VAC;600VDC	A	15^	25&	–	60#	25^	50#	50^	125#	30^	60	50^	150	40^	50^
HU364RB	600VAC;600VDC	D	–	–	15^	60&	–	–	50^	125&	–	–	50^	150	40^ <	50^ <

HEAVY DUTY SAFETY SWITCHES
VISIBLE BLADE TYPE
200 AMPERE — SERIES F5
ENCLOSURE — NEMA TYPE 3R RAINPROOF
SEISMIC



by Schneider Electric

DWG# 3262S
NO.