


SUPPLIED WITH ACPL CLOSING PLATE
(FOR UNDERGROUND SERVICE),
ORDER TYPE A-L HUB SEPARATELY
(FOR OVERHEAD SERVICE)

TOP POSITION
OMITTED ON
2-GANG UNIT

TENANT CIRCUIT
BREAKER DOORS
(PADLOCKABLE)

COVER KNOCKOUT FOR
USE WITH UTILITY
BARREL LOCK (RINGLESS
DEVICES ONLY)

INDIVIDUAL METER
SOCKET COVERS:
RING TYPE (INCLUDES
SNAP TYPE ALUMINUM
SEALING RINGS) OR
RINGLESS STYLE
(SUPPLIED WITH
COVER SEALING
LATCHES)

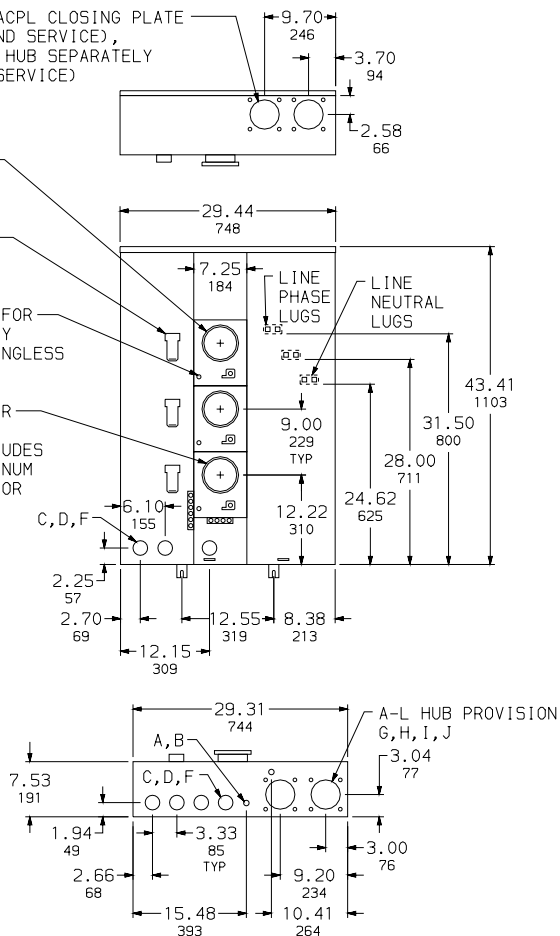

NOTES:


FINISH - UL COMPONENT RECOGNIZED GRAY BAKED POWDER COAT PAINT OVER CLEANED PHOSPHATIZED STEEL.
UL LISTED - FILE E-6294. SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT. SUITABLE FOR OH/UG SERVICE.
RING-TYPE DEVICE SUPPLIED WITH 4-JAW METER SOCKET, 5TH JAW KIT AVAILABLE.
SURFACE MOUNT, CONVERTIBLE TO SEMI-FLUSH WITH FIELD INSTALLED KIT.
MECHANICAL LUGS FACTORY INSTALLED, LUG LANDING PADS AVAILABLE.

■ LOAD PHASE LUGS ARE SUPPLIED AS A PART OF THE CIRCUIT BREAKER (TENANT SERVICE DISCONNECT).


▲ SHORT CIRCUIT CURRENT RATING OF METER CENTER IS EQUAL TO THE RATING OF THE LOWEST INSTALLED TENANT SERVICE DISCONNECT.

± LUGS LARGER THAN 600 KCMIL REQUIRE USE OF LUG LANDING PADS (ORDER CATALOG NUMBER MMSK2 SEPARATELY).

● WIRE BENDING SPACE PER NEC TABLE 373-6




MOUNTING CHANNEL
DETAIL

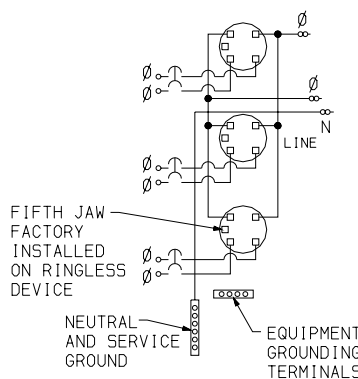


SYMBOL	CONDUIT SIZE		HOLE DIAMETER	
	IN	MM	IN	MM
A	.50	13	.88	22
B	.75	19	1.25	32
C	1.00	25	1.38	35
D	1.25	32	1.75	44
E	1.50	38	2.00	51
F	2.00	51	2.50	64
G	2.50	64	3.00	76
H	3.00	76	3.63	92
I	3.50	89	4.13	105
J	4.00	102	4.63	118


TENANT SERVICE DISCONNECTS (ORDER ONE PER SOCKET POSITION)			
AMPERE RATING	CATALOG NUMBER	SHORT CIRCUIT CURRENT RATING RMS SYMMETRICAL AMPERES ▲	WIRE RANGE (AWG) ●
100 125 150 175 200	QOM2100MM QOM2125MM QOM2150MM QOM2175MM QOM2200MM	10,000	# 4-250 AL/CU
100 125 150 175 200	QOM2100MVH QOM2125MVH QOM2150MVH QOM2175MVH QOM2200MVH	22,000	# 4-250 AL/CU



RINGLESS COVER LATCH

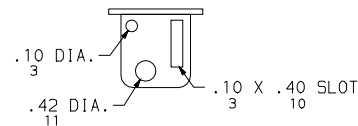

SEAL BRACKET



MOUNTING FOOT

ALTERNATE MECHANICAL LUGS	
WIRE SIZE	CATALOG NO.
(1) 1/0-600 AWG/KCMIL OR (2) 1/0-250 PER PHASE	MMLK250
(2) 3/0-500 AWG/KCMIL PER PHASE	MMLK500
(2) 2-600 AWG/KCMIL PER PHASE	MMLK600

DUAL DIMENSIONS: INCHES
MILLIMETERS

METER SOCKET COVER	NO. OF METER SOCKETS	NO. OF JAWS	FACTORY INSTALLED BYPASS	120/240VAC, 1Ø 3 WIRE OR 208Y/240VAC, 1Ø 3 WIRE (5TH JAW REQUIRED)		LOAD LUG WIRE SIZES (AWG-KCMIL)	
				MAIN BUS RATING	CATALOG NUMBER	LINE LUG WIRE SIZES (AWG/KCMIL) PHASE AND NEUTRAL	NEUTRAL, SERVICE GROUND & EQUIPMENT GROUNDING
RING-TYPE	2	4	NONE	400	MP42-200	(1) 1/0-600 OR (2) 1/0-250	SEE CIRCUIT BREAKER WIRE SIZE
RING-TYPE	3	4	NONE	400	MP43-200		
RINGLESS	2	5	NONE	400	MPR42-200		
RINGLESS	2	5	HORN	400	MPH42-200		
RINGLESS	3	5	NONE	400	MPR43-200		
RINGLESS	3	5	HORN	400	MPH43-200		

MP METER-PAK METERING EQUIPMENT
NEMA TYPE 3R ENCLOSURE
200A MAXIMUM TENANT CIRCUIT BREAKERS

SQUARE D COMPANY

DWG. NO. 2527