

DuraPort™ Industrial Cat 6 Patch Cords

APPLICATION

DuraPort Industrial Cat 6 Patch Cords provide IP67-class protection to safeguard your connectivity from ingress of dust and water conditions often found in the industrial environment.



SPECIFICATION

Industrial Plug-to-Industrial Plug and Industrial Plug-to-RJ-45 Plug patch cords shall be IP67 rated. The patch cords shall be stranded tinned UTP, with an 8-position modular plug on each end. The cords shall be available in lengths of 3, 5, 7, 10, 15, 20, and 50 feet. The cords shall be compliant with ANSI/TIA-1005 and ANSI/TIA-568.2-D. All plastics used in construction of the connector bodies shall be fire retardant with a UL flammability rating of 94V-0.

DESIGN CONSIDERATIONS

- ANSI/TIA channel performance limits the total length of work area and equipment room cords to 32 feet (10 meters) per ANSI/TIA-568.2-D or 88.6 feet (27 meters) in a MUTOA application
- Designed for use with DuraPort Industrial Connector Housings and QuickPort connectors to provide IP67 protection against dust and water

COUNTRY OF ORIGIN

Taiwan

WARRANTY INFORMATION

For a copy of Leviton product warranties, visit www.leviton.com/warranty.

FEATURES

- IP67-rated Environmental Sealing (dust/water protection)
- Industrial Plug o-ring and gasket provides dual seal feature
- Withstands ingress of water during washdown
- Sealing nut provides strain relief and seal to prevent contamination from liquids and dust
- Patch cords available in Industrial Plug-to-Industrial Plug and Industrial Plug-to-RJ-45 Plug
- Available in seven standard lengths (custom lengths available)
- Twist-lock design for faster installation and changes
- Encapsulated RJ-45 design protects integral components
- Patented design
- Cat 6 UTP cable — 24-gauge stranded

PHYSICAL SPECIFICATIONS

Ingress Protection:	IEC 60529 IP67 (dust/water)
Temperature:	-40°C to 65°C (-40°F to 149°F)
Jacket Flame Rating:	UL 444 CMX-Outdoor (VW-1 flame test)
Sunlight Resistance:	UL 444 7.22 720 hours
Oil Resistance:	UL 1581 (Elongation and Tensile Strength). Aged in oil 168h @ 60°C. 97.1% retention of original elongation, 100% retention of original tensile strength.
Abrasion:	UL 2556 7.10 2,000 cycles/100g load
Cold Bend:	UL 444 -20°C
PoE:	Up to 32-cable bundle for 100 watts at 45°C ambient temperature
Vibration:	Frequency Range 10-500Hz Acceleration 5g operational
Mating Cycles:	750 minimum
Cable Diameter:	0.283" (7.2mm)
Materials:	
Plug Housing	Polybutylene Terephthalate (PBT)
Cable Outer Jacket	Thermoplastic Elastomer (TPE)
Cable Cordgrip	Nylon 6/6 with Buna N seal gland
RJ45 Boot (D6721)	Thermoplastic Elastomer (TPE)

STANDARDS COMPLIANCE

- ANSI/TIA-1005-A and ANSI/TIA-568.2-D Category 6
- cULus Listed (UL1863, CAN/CSA-C22.2 No. 182.4-1990)
- IEC 60529
- IEEE 802.3bt PoE: Type 1 (15.4 W) formerly 802.3af, Type 2 (30 W) formerly 802.3at, Type 3 (60 W), Type 4 (90 W)
- Cisco UPoE (60 W), UPoE+ (90 W)
- Power over HDBaseT™ PoH (95 W)

Leviton Network Solutions

2222 - 222nd St. SE
Bothell, WA 98021-4416

tel 1-800-824-3005
tel +1-425-486-2222
appeng@leviton.com
www.leviton.com

Asia / Pacific

T +1.631.812.6228
E infoasean@leviton.com

Europe

T +44.0.1592.772124
E customerserviceeu@leviton.com

Canada

T +1.514.954.1840
E pcservice@leviton.com

Mexico

T +52.55.5082.1040
E lsamarketing@leviton.com

Caribbean

T +1.954.593.1896
E infocaribbean@leviton.com

Middle East & Africa

T +971.4.247.9800
E lmeinfo@leviton.com

China

T +852.2774.9876
E infochina@leviton.com

South Korea


T +82.2.3273.9963
E infokorea@leviton.com

Colombia


T +57.1.743.6045
E infocolombia@leviton.com

ELECTRONIC FILES

For CAD files, typical specs, or technical drawings (.DXF, .DWG), visit www.leviton.com.



Industrial Plug-to-Industrial Plug

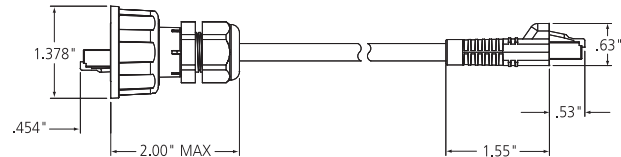

Industrial Plug-to-RJ45 Plug

D6720-xxE, D6721-xxE

CAT 6 DURAPORT INDUSTRIAL PATCH CORDS

Description	Industrial Plug-to-Industrial Plug	Industrial Plug-to-RJ45 Plug
	Part No.	Part No.
DuraPort Industrial Patch Cords, 3 feet	D6720-03E	D6721-03E
DuraPort Industrial Patch Cords, 5 feet	D6720-05E	D6721-05E
DuraPort Industrial Patch Cords, 7 feet	D6720-07E	D6721-07E
DuraPort Industrial Patch Cords, 10 feet	D6720-10E	D6721-10E
DuraPort Industrial Patch Cords, 15 feet	D6720-15E	D6721-15E
DuraPort Industrial Patch Cords, 20 feet	D6720-20E	D6721-20E
DuraPort Industrial Patch Cords, 50 feet	D6720-50E	D6721-50E



Leviton Network Solutions
 2222 - 222nd St. SE
 Bothell, WA 98021-4416

Asia / Pacific
 T +1.631.812.6228
 E infoasean@leviton.com

Canada
 T +1.514.954.1840
 E pcservice@leviton.com

Caribbean
 T +1.954.593.1896
 E infocaribbean@leviton.com

China
 T +852.2774.9876
 E infochina@leviton.com

Colombia
 T +57.1.743.6045
 E infocolombia@leviton.com

tel 1-800-824-3005
 tel +1-425-486-2222
appeng@leviton.com
www.leviton.com

Europe
 T +44.0.1592.772124
 E customerserviceeu@leviton.com

Mexico
 T +52.55.5082.1040
 E lsamarketing@leviton.com

Middle East & Africa
 T +971.4.247.9800
 E lmeinfo@leviton.com

South Korea
 T +82.2.3273.9963
 E infokorea@leviton.com