

|                 |              |                     |              |
|-----------------|--------------|---------------------|--------------|
| <b>Project:</b> | <b>Type:</b> | <b>Prepared By:</b> | <b>Date:</b> |
|-----------------|--------------|---------------------|--------------|



**Features and Benefits**

- Replaces 18W/26W/32W 2G11 CFL Lamps
- Ballast Bypass. Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast
- 50,000 hour Lifespan
- Environmentally friendly, no mercury used
- UL Classified, DLC Listed
- Rated for use in enclosed and open fixtures in dry or damp locations
- 5 Year No Compromise Warranty

| Technical Specifications  |  |  |
|---|--|--|
| <p><b>Performance</b></p> <p><b>Product Type:</b><br/>Compacts</p> <p><b>Input Wattage:</b><br/>17W</p> <p><b>Wattage Equivalency:</b><br/>40W Fluorescent</p> <p><b>Lumens (Nominal):</b><br/>2,100lm</p> <p><b>Efficacy:</b><br/>124lm/W</p> <p><b>L70 Lifespan:</b><br/>50,000 Hours</p> <p><b>Electrical</b></p> <p><b>THD:</b><br/>&lt;20%</p> <p><b>Power Factor:</b><br/>0.9</p> | <p><b>Dimmable:</b><br/>Not suggested for dimming applications</p> <p><b>Operating Temperature:</b><br/>-20°C to 45°C (-4°F to 113°F)</p> <p><b>Input Voltage:</b><br/>120-277V AC</p> <p><b>Operating Frequency:</b><br/>50/60Hz</p> <p><b>Construction</b></p> <p><b>Bulb Shape:</b><br/>PLL</p> <p><b>Finish:</b><br/>Frosted</p> <p><b>Base Type:</b><br/>2G11</p> <p><b>For Use Outdoors in Open Fixtures:</b><br/>No</p> | <p><b>LED Characteristics</b></p> <p><b>Color Temperature:</b><br/>3500K Neutral White</p> <p><b>Color Accuracy (CRI):</b><br/>82 CRI</p> <p><b>Other</b></p> <p><b>Warranty:</b><br/>RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <a href="http://rablighting.com/warranty">rablighting.com/warranty</a>.</p> <p><b>Installation</b></p> <p><b>Installation Type:</b><br/>Type B, Ballast Bypass</p> <p><b>Installation Orientation:</b><br/>Horizontal</p> |

**Technical Specifications (continued)**

**Compliance**

**UL Recognized:**

Yes

**UL Classified:**

Yes

**NSF Listed:**

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

**Model Number for Certification:**

PLL-17-835-BYP

**California Energy Commission (CEC) Status:**

Lawful for Sales in California

**Application:**

Suitable for damp locations and totally enclosed fixtures.

**DLC Listed:**


This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PSNCMEPC

**Case and Pallet Dimensions**

|        | QTY  | LENGTH (in) | WIDTH (in) | HEIGHT (in) |
|--------|------|-------------|------------|-------------|
| CASE   | 25   | 23.6        | 9.8        | 7           |
| PALLET | 1400 | 47.2        | 39.4       | 40.2        |

**Wiring Diagram**

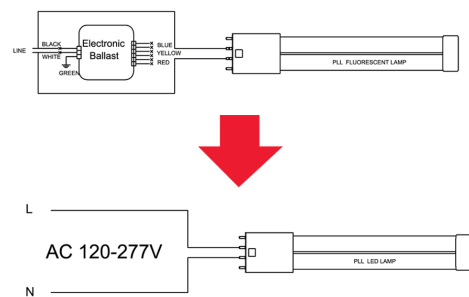

Dimension

