


## YH3434, Compression H-Tap

By Burndy  
Catalog # YH3434

Copper Compression H Tap, Tin Plated, Accommodating the following wire sizes - Run (Main): 500 KCMIL-250 KCMIL Class B,C, 373 KCMIL-4/0 AWG DLO, 350 KCMIL-4/0 AWG Class I, 4/0 AWG Class K. See sale drawing for metric wire size accommodates

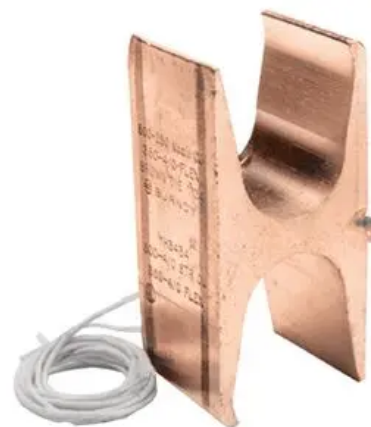

### Features

- Uninsulated compression H-tap connector, tin-plated
- Designs with more than one tap wire groove require installers to utilize a minimum of one Main (Run) and one Tap groove, other grooves can be left empty
- 'Third Hand' is a string provided with the H-tap connector and is used to wrap the wire while being inserted into the run and tap grooves
- H-tap connectors can be purchased separately or kitted with covers
- YH is connector sold separately without cover
- YH-WC is kitted H-tap connector and black cover
- YH-WCC is kitted H-tap connector and clear cover

### Application

Wire Tap

### General

Catalog Number	YH3434
Color Code	Brown
Connector Type	H-TAP
Die Index	1104
EU RoHS Indicator	Yes
Finish Type	Tin-Plated
Material	COPPER
Plated	Y
Plating Type	Tin - Electro Plated
Sub Brand	CRIMPIT
Temperature Rating	194
Trade Name	CRIMPIT™
Type	Compression Taps
UPC	781810144213
UPC 12 Digit	7818101442133

### Dimensions

Dimension - Height inch	2.43 in
Dimension - L Length Overall mm	25 mm
Dimension - Length Overall inch	1.00 in
Dimension - Strip Length inch	1-1/8

Dimension - Width fraction	1.15 in
Dimension - Width inch	2.43 in

### Electrical Ratings

Voltage - Maximum	35000
Voltage Rating	35 kV

### Conductor Related

Conductor - Copper Flex G Run	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex G Run Range	4/0 AWG-350 kcmil
Conductor - Copper Flex G Tap	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex G Tap Range	4/0 AWG-350 kcmil
Conductor - Copper Flex H Run	350 kcmil
Conductor - Copper Flex H Run Range	350 kcmil
Conductor - Copper Flex H Tap	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex H Tap Range	4/0 AWG-350 kcmil
Conductor - Copper Flex I Run	350 KCMIL-4/0 AWG
Conductor - Copper Flex I Run Range	4/0 AWG-350 kcmil
Conductor - Copper Flex I Tap	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex I Tap Range	350 KCMIL-4/0 AWG
Conductor - Copper Flex K Run	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex K Run Range	4/0 AWG-350 kcmil
Conductor - Copper Flex K Tap	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex K Tap Range	4/0 AWG-350 kcmil
Conductor - Copper Flex M Run	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex M Run Range	4/0 AWG-350 kcmil

Conductor - Copper Flex M Tap	4/0 AWG;250 kcmil;300 kcmil;350 kcmil
Conductor - Copper Flex M Tap Range	4/0 AWG-350 kcmil
Conductor - Copper Str Run	250 kcmil;300 kcmil;350 kcmil;400 kcmil;450 kcmil;500 kcmil
Conductor - Copper Str Run Range	500 KCMIL-250 KCMIL
Conductor - Copper Str Tap	4/0 AWG;250 kcmil;300 kcmil;350 kcmil;400 kcmil;450 kcmil;500 kcmil
Conductor - Copper Str Tap Range	500 KCMIL-4/0 AWG
Conductor - Material	COPPER
Conductor Type	CODE/FLEX

### Certifications And Compliance

Buy American Compliant	Yes
Certification - CSA Approved	Yes
Certification - ETL	No

Certification - UL Recognized	No
Certification - cULus	No
Industry Standard(s)	UL 486A-486B
Standards - Industry Standards Met	UL467
Standards - RoHS Compliance Status	CM
UL Listed	Yes

### Logistics

Minimum Pack Quantity	1
-----------------------	---

### Product Assets

- [Catalogs - BURNDY Master Catalog - Section C - Compression Connections](#)
- [Catalogs - BURNDY Master Catalog - Full Line BURNDY Catalog](#)
- [Customer Notices - Prop 65 Notice](#)
- [Interactive Catalog - BURNDY Full-Line Digital Catalog](#)
- [Product Cross Section Image\(s\) - BUR\\_YH\\_LINEART](#)
- [Sales Drawings - SD..206566-01](#)
- [Specifications - YH3434](#)



A Hubbell brand