




# YAZV25TC38FX, Compression Terminal, 1/0 Flex G,H,I,K,M, DLO, 1/0 AWG B/C, Cu, 1-Hole, 3/8" Stud, Long Barrel

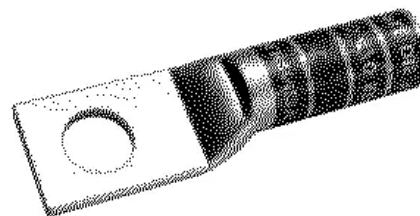

By Burndy  
Catalog # [YAZV25TC38FX](#)

1/0 Flex G,H,I,K,M,DLO, 1/0 AWG (B/C) CU, One Hole, 3/8 Stud Size, Long Barrel, Internal Chamfer, Tin Plated, UL/CSA, 90°C, Up to 35kV, Pink Color Code, 12 or 348 Die Index.

## Features

- Barrel is designed with an internal chamfer at the wire entry to ensure smooth insertion of the wire, preventing possible damaging of the strands
- Electro-tin plated unless otherwise specified to reduce galvanic corrosion (bimetallic) and resist corrosive elements
- Connectors are clearly marked with stamping and barrel color coding

## Application

Wire Termination

## General

Catalog Number	YAZV25TC38FX
Color Code	Pink
Connector Type	LONG BARREL
Construction Material - Main	Copper tubing
Die Index	12
EU RoHS Indicator	Yes
Feature - Barrel Style	Skived
Feature - Barrel Type	Long
Finish Type	Tin-Plated
Material	COPPER
Physical Attribute - Number of Holes	1
Plated	Y
Plating Type	Tin
Sub Brand	HYLUG
Trade Name	HYLUG™
Type	YAZV, Long Barrel
UPC	781810241462
UPC 12 Digit	7818102414622

## Dimensions

Dimension - B Length fraction	1-1/2 in
Dimension - B Length inch	1.50 in
Dimension - Bolt Hole Size inch	0.39 in
Dimension - Bolt Size fraction	3/8
Dimension - Bolt Size inch	0.38

Dimension - Hole Size fraction	3/8
Dimension - Hole Size inch	0.41
Dimension - Hole Size mm	10.4 mm
Dimension - L Length Overall mm	70 mm
Dimension - Length Overall inch	2.75 in
Dimension - N inch	0.41 in
Dimension - Outside Diameter inch	0.56 in
Dimension - Pad Width inch	0.83 in
Dimension - Strip Length inch	1-9/16
Dimension - Stud Size fraction	3/8
Dimension - Stud Size inch	3/8
Dimension - Z (inch)	0.42 in
Physical Attribute - Tongue Angle	Straight

## Electrical Ratings

Voltage - Maximum	35000
Voltage Rating	35 kV

## Conductor Related

Conductor - Copper DLO Size	1/0 AWG
Conductor - Copper DLO Size Range	1/0 AWG
Conductor - Copper Flex G Size	"1/0 AWG"
Conductor - Copper Flex G Size Range	1/0 AWG
Conductor - Copper Flex H Size	"1/0 AWG"
Conductor - Copper Flex H Size Range	1/0 AWG
Conductor - Copper Flex I Size	"1/0 AWG"
Conductor - Copper Flex I Size Range	1/0 AWG
Conductor - Copper Flex K Size	"1/0 AWG"
Conductor - Copper Flex K Size Range	1/0 AWG
Conductor - Copper Flex M Size	"1/0 AWG"

Conductor - Copper Str Compact Size	"1/0 AWG"
Conductor - Copper Str Navy Size	100
Conductor - Copper Str Size	"1/0 AWG"
Conductor - Copper Str Size Range	1/0 AWG
Conductor - CopperWeld Str Size	1/0 F AWG;1/0 G AWG;1/0 J AWG;1/0 K AWG
Conductor - Material	COPPER
Conductor Size	1/0 AWG
Conductor Type	CODE/FLEX
Wire Size	1/0 AWG

### Certifications And Compliance

Buy American Compliant	Contact Manufacturer
Certification - CSA Approved	Yes
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Industry Standard(s)	UL 486A-486B
Standards - RoHS Compliance Status	CM

UL Listed Yes

### Logistics

Carton Quantity	100
Minimum Pack Quantity	1
Pallet Quantity	24500

### Product Assets

- [3D Models - YAZV25TC38FX\\_MODEL-PDF](#)
- [3D Models - YAZV25TC38FX\\_MODEL-STEP](#)
- [3D Models - YAZV25TC38FX\\_MODEL-IGES](#)
- [Catalogs - BURNDY Master Catalog - Section C - Compression Connections](#)
- [Catalogs - BURNDY Master Catalog - Full Line BURNDY Catalog](#)
- [Customer Notices - Prop 65 Notice](#)
- [Installation Manuals - Copper Flex Long Terminals Tooling and Installation Instructions](#)
- [Interactive Catalog - BURNDY Full-Line Digital Catalog](#)
- [Sales Drawings - SE..212448-06](#)
- [Specifications - YAZV25TC38FX](#)
- [Video - HYDENT Compression Terminal Overview Video](#)



A Hubbell brand