

PRODUCT INFORMATION

LED strip fixtures

Even, consistent light.
Low maintenance.
High efficiency.



Applications

- Bathrooms
- Kitchen
- Work areas
- Hallways
- Retail


Features

- 4' Stand-alone and **NEW** 2' stand-alone models
- 2' stand-alone strip complies with NEC 410.16 (A)(3) and NEC 410.16 (C)(5)
- 1', 2', and 4' Connectable models (includes male/male butt connectors)
- Ceiling or wall mount
- Maintenance free – no bulb to change
- Consistent, even light distribution
- 90 CRI
- Ultra-slim design
- Damp location rated
- 4000K
- 50,000 hour life
- ENERGY STAR certified
- 5 Year warranty

See back for additional information

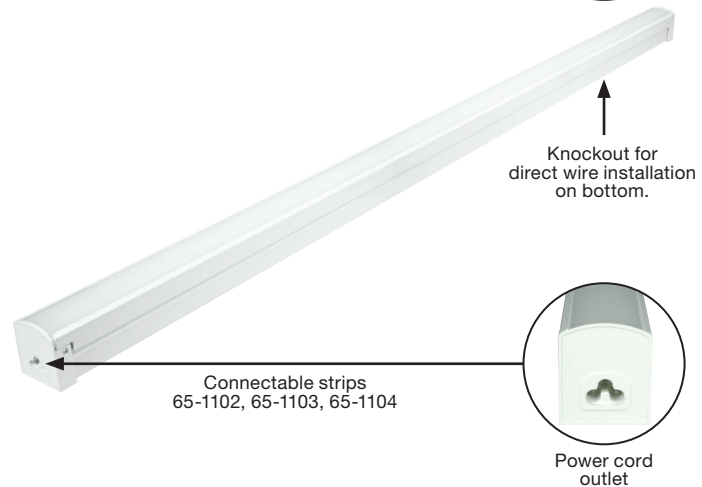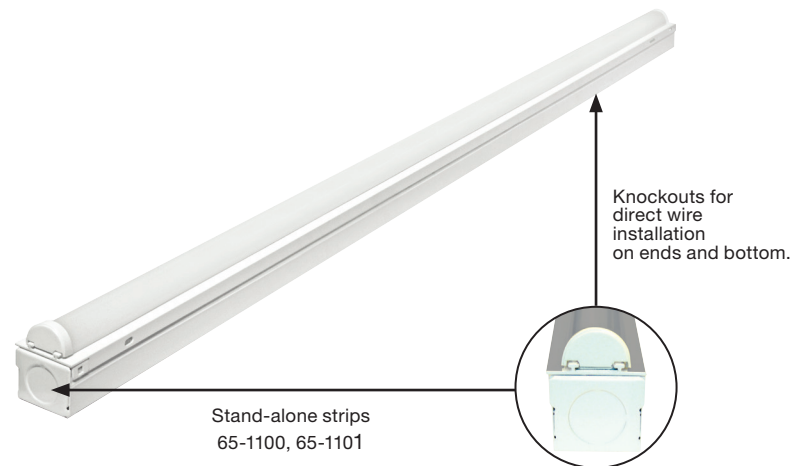

Accessories



PRODUCT INFORMATION

LED strip fixtures



Stand-alone strips
65-1100, 65-1101



Connectable strips
65-1102, 65-1103, 65-1104

Accessories



5' Power cord
65-1107



Connectors:
8 inch 65-1108
16 inch 65-1112
24 inch 65-1113

Maximum number of units that can be connected:

- 65-1102 - 27 units
- 65-1103 - 14 units
- 65-1104 - 9 units

LED Strip Fixtures



Item Number	Size	Watt	Input Voltage (V)	CCT	Lumen	CRI (RA)	PF	Location	Life/Hrs.	Installation	Linkable or Non
65/1100	2FT	12	100-277	4000K	900	90	0.9	Damp	50K	surface mounting on ceiling or wall	Non Linkable
65/1101	4FT	24	100-277	4000K	1800	90	0.9	Damp	50K	surface mounting on ceiling or wall	Non Linkable
65/1102	1FT	12	120	4000K	840	90	0.9	Damp	50K	surface mounting on ceiling or wall	Linkable
65/1103	2FT	24	120	4000K	1680	90	0.9	Damp	50K	surface mounting on ceiling or wall	Linkable
65/1104	4FT	36	120	4000K	2600	90	0.9	Damp	50K	surface mounting on ceiling or wall	Linkable
Accessories											
65-1107	5 foot power cord										
65-1108	8 inch male/male joiner										
65-1112	16 inch male/male joiner										
65-1113	24 inch male/male joiner										