



SPECIFICATIONS
AK-1HSG
 EXHAUST FAN HOUSING

Exhaust Fan Housing

- Fan Housing**

23 gauge galvanized steel housing.
 Dimensions 10⁷/₈" x 9³/₈" x 7⁷/₈".

- Duct Collar**

Plastic collar for 4" duct connection, comes complete with built in non-metallic back draft damper for quiet operation.

- Unit Mounting**

The housing will mount in ceilings with at least 8" of clearance and through drywall thickness up to ³/₄", with a rough-in opening of 11¹/₈" x 9⁵/₈". The housing will mount either between 16" or 24" on center joists, using the 4 supplied housing mounting rails. The housing mounting rails can be adapted for overhead mounting (hardware not provided).

- Electrical Connections**

¹/₂" electrical knockouts provided.


Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.

- Available Trim Kits**

AK80LS1T: 80 CFM, ENERGY STAR® certified
AK80MBG: 80 CFM, ENERGY STAR® certified
AK90MBG: 90 CFM, ENERGY STAR® certified
AK110PNT: 100 CFM, ENERGY STAR® certified

- Shipping Info**

Number of Housings in Box: 4
 UPC Code: 083162224026

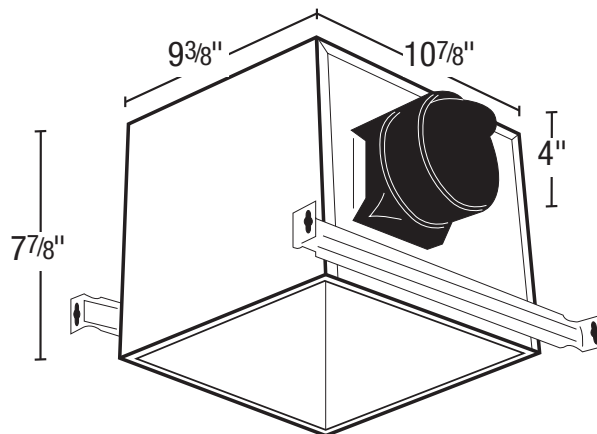

Housing ONLY. Must be combined with AK series trim kit (sold separately)

PROJECT							ARCHITECT		
LOCATION							ENGINEER		
CONTRACTOR							SUBMITTED BY		DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS



820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048