



SPECIFICATIONS  
**AK-4HSG**  
 EXHAUST FAN HOUSING

## Exhaust Fan Housing

- Fan Housing**

23 gauge galvanized steel housing.  
 Dimensions 12<sup>7</sup>/<sub>8</sub>" x 12<sup>3</sup>/<sub>4</sub>" x 9<sup>7</sup>/<sub>8</sub>".

- Duct Collar**

6" round, zinc plated metal collar adapter. 6" spring loaded aluminum backdraft damper.

- Unit Mounting**

The housing will mount in ceilings with at least 10" of clearance and through drywall thickness up to 3/4", with a rough-in opening of 13<sup>1</sup>/<sub>8</sub>" x 13". The housing will mount either between 16" or 24" on center joists, using the 4 supplied housing mounting rails. The housing mounting rails can be adapted for overhead mounting (hardware not provided).

- Electrical Connections**

1/2" electrical knockouts provided.


Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.

- Available Trim Kits**

**AK150LST**: 150 CFM, ENERGY STAR® certified

- Shipping Info**

Number of Housings in Box: 2  
 UPC Code: 083162941442

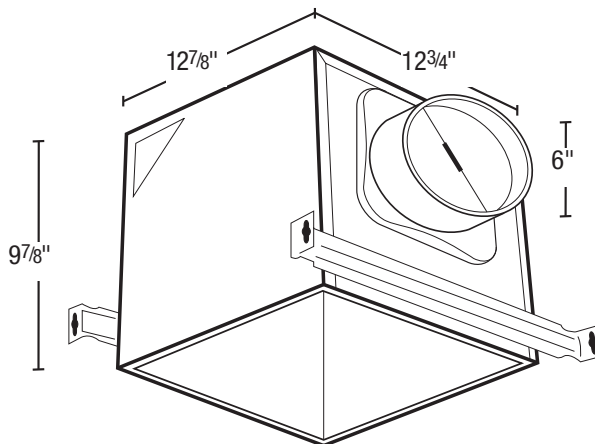

**Housing ONLY. Must be combined with AK150LST trim kit (sold separately)**

<b>PROJECT</b>							<b>ARCHITECT</b>		
<b>LOCATION</b>							<b>ENGINEER</b>		
<b>CONTRACTOR</b>							<b>SUBMITTED BY</b>		<b>DATE</b>
<b>FAN NUMBER</b>	<b>MODEL NUMBER</b>	<b>CFM</b>	<b>IN W.G.</b>	<b>RPM</b>	<b>WATTS</b>	<b>AMPS</b>	<b>SONES</b>	<b>QTY</b>	<b>OPTIONAL EQUIPMENT &amp; REMARKS</b>



820 Lincoln Avenue  
 West Chester, Pennsylvania 19380-4466  
 Tel: (610) 692-7400 • 877-304-3785  
 Fax: (610) 696-8048