

PRIORI XENON


Popular, versatile, economical under cabinet light

PRIORI XENON

PRIORI Xenon Under Cabinet Lights add useful dimmable light to kitchen counters, workshops, home offices, back bars, butler's pantries, retail areas, display areas, entertainment centers and more.

FEATURES

- Low profile design – only 15/16" high
- Bright dimmable white light that lasts three times longer than halogen
- 120V xenon lamps require no transformer
- Front lens cover prevents light leakage
- Prismatic tempered glass lens distributes light evenly
- Full length specular reflector optimizes light output
- Magnetic lens closure reliably secures cover without clips or tabs that can bend or break
- Easy installation – lamps included with each fixture
- Tool-free access to wiring compartment
- New captive screws speeds mounting and installation
- Choose from plug-in with included power cord or hard-wire featuring stab connectors and multiple knockouts
- High/low/off switch

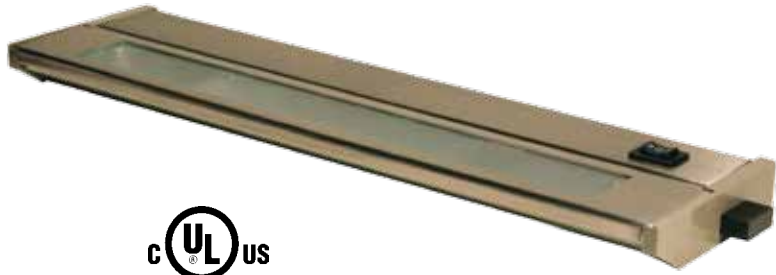

Brushed Steel



Dark Bronze



White


BILL OF MATERIALS

PRIORI Xenon uses the same layout options and installation accessories as the PRIORI T2. See page 39 for additional examples and creating a Bill of Materials.

Bill of materials for end-to-end installation shown below:

- (1) 043X-1-WH
- (2) 043X-2-WH
- (1) 043J-WH

INSTALLATION EXAMPLE

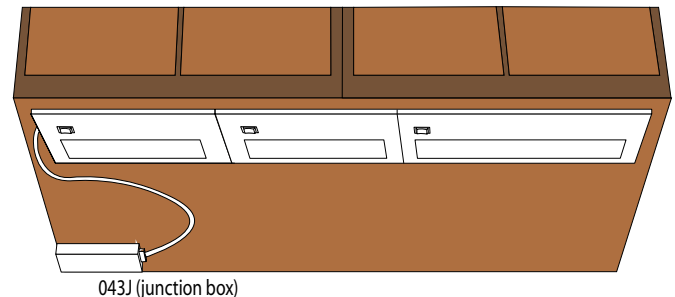

Note: If fixtures are mounted with front facing backsplash, power enters on left side.

FIXTURES

043X	—		—	
PRIORI Xenon (Hardwire)		1 = 10-1/4" length 2 = 14-1/2" length 3 = 22-1/2" length 4 = 32-1/2" length		BS* DB* WH*

043X	—		—	
PRIORI Xenon (Cord and Plug)		1P = 10-1/4" length 2P = 14-1/2" length 3P = 22-1/2" length		BS* DB* WH*

Note: Each hardwire fixture includes lamp(s) and 3/8" cable connector. Each cord and plug unit includes lamp(s) and six foot power cord. Captive screws (5/8" long) are standard.

*Fixture finishes: BS = Brushed Steel, DB = Dark Bronze, WH = White

ACCESSORIES



043J-BR, 043J-WH

Hardwire junction box for PRIORI fixtures, BR = Bronze, WH = White
7-3/8"L x 2-1/8"W x 1"H; includes 12" extension and two 3/8" cable connectors, c/UL/us Listed



043X-20BP

120V Xenon replacement lamp
20 watt bi-pin, G8; M.O.L. = 1-3/4"



043A-PC6-BK, 043A-PC6-WH

Six foot power cord for PRIORI fixtures, 120V AC grounded plug and 3-wire grounded molex connector, BK = Black, WH = White; c/UL/us Listed



043A-(LENGTH)-EX-(COLOR)

Black linking extensions (jumpers) for connecting multiple PRIORI fixtures; available in 6", 12", 24" and 36" lengths; BK = Black, WH = White; c/UL/us Listed

TECHNICAL SPECIFICATIONS

Voltage	120V, 60Hz AC operation
Construction	Cold rolled steel housing, powder coat finish, full length aluminum reflector and plastic end caps with stand-offs for heat dissipation
Mounting	Mount to underside of shelf or cabinet, at leading edge for best performance; see also page 39.
Dimensions	H = 15/16", W = 3-3/4", available Lengths = 10-1/4", 14-1/2", 22-1/2" and 32-1/2"
Switching	High/Low/Off rocker switch
Knockouts	3/8" knockouts standard: every 4" along the back and every 4" along top of housing; or use hardwire junction box (043J, sold separately) which includes four 3/8" knockouts, two reducers/wire clamps and 'stab' connectors
Wattages	043X-1 = 20 watts, 043X-2 = 40 watts, 043X-3 = 60 watts, 043X-4 = 80 watts
Power cord	Six-foot power cord (043A-PC6, sold separately)
Maximum run	600 watts
Lamp specs	8,000 hour rated life, 100CRI, 2800K, G8 base, 20 watts, 120V, 1-3/4" M.O.L.
Dimmers	Dimmable with most standard incandescent dimmers
Diffuser	Full length, captive hinged lens cover with magnetic closure
Packaging	Retail box with hang tab, 6 boxes per case



P/H

